

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number
WO 2004/099508 A2

(51) International Patent Classification⁷: **E02B**
(21) International Application Number:
PCT/US2004/012992
(22) International Filing Date: 30 April 2004 (30.04.2004)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
60/468,137 1 May 2003 (01.05.2003) US
Not furnished 29 April 2004 (29.04.2004) US

(74) Agent: **MARSH, Virgil, H.**; Fisher, Christen & Sabol,
Suite 1108, 1725 K Street, NW, Washington, DC 20006
(US).


(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicants and
(72) Inventors: **LANDRY, David, Charles** [US/US]; 355
Black River Drive, Madisonville, LA 70447 (US). **BEN-**
NETT, William, Thomas, Jr. [US/US]; 301 Avenue E,
Metaire, LA 70005 (US).


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: **BERTHING METHOD AND SYSTEM**

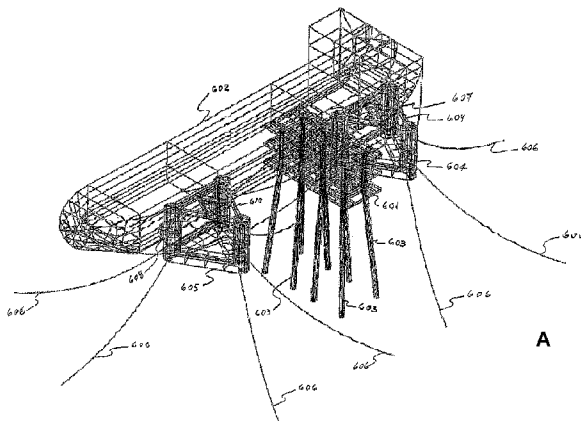

(57) Abstract: A method and a system are provided for the safe berthing of marine vessels in the high seas and other unprotected open waters. The invention allows a large vessel to be berthed alongside in close enough proximity to a marine structure that conventional loading arm equipment may be used to load and unload the vessel under most environmental conditions. One or more floating dolphins moored to the bottom of the sea and provided with fendering means are used for berthing the vessel alongside to the marine structure. The preferred type of floating dolphin is a triangular semi-submersible moored buoyant structure comprising three buoyant column members, or "caissons", arranged in vertical fashion, three buoyant hull segments, or "pontoons", that support and separate the column members and provide heave damping to the moored buoyant structure, and three horizontal bracing members that retain the tops of the column members in place.

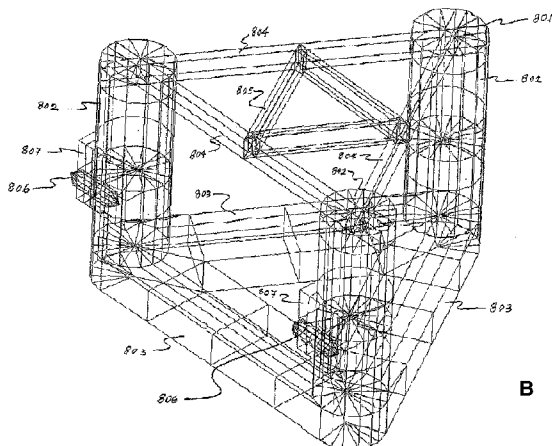

WO 2004/099508 A2



FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*