



- (51) **International Patent Classification:**
F41G 3/06 (2006.01)
- (21) **International Application Number:**
PCT/IB2012/051389
- (22) **International Filing Date:**
22 March 2012 (22.03.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
211966 28 March 2011 (28.03.2011) IL
- (71) **Applicant (for all designated States except US):** SMART SHOOTER LTD. [IL/IL]; 19238 Kibbutz Ramat Hashofet (IL).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** EHRLICH, Avshalom [IL/IL]; 19238 Kibbutz Ramat Hashofet (IL).
- (74) **Agent:** FRIEDMAN, Mark; Dr. Mark Friedman Ltd., Moshe Aviv Tower, 54 F, 7 Jabotinsky St., 52520 Ramat Gan (IL).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- with amended claims (Art. 19(1))

Date of publication of the amended claims: 22 November 2012

(54) **Title:** FIREARM, AIMING SYSTEM THEREFOR, METHOD OF OPERATING THE FIREARM AND METHOD OF REDUCING THE PROBABILITY OF MISSING A TARGET

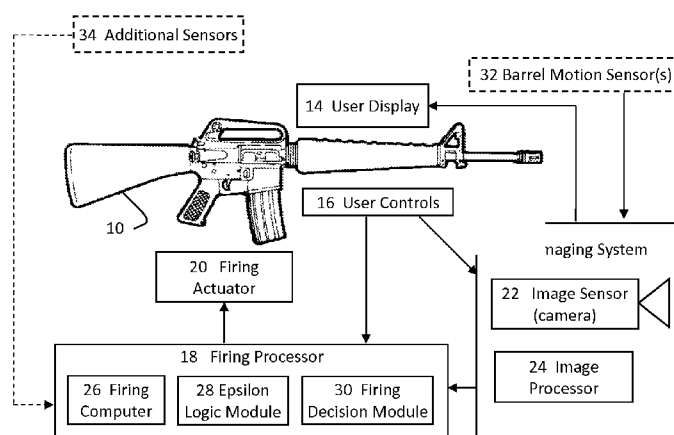


Fig. 1

(57) **Abstract:** A firearm aiming system comprising an imaging system comprising an imaging sensor and an image processor; and a user display, wherein the imaging system is adapted to detect a potential target on the user display based on target features. In some embodiments the system includes a firing processor with an epsilon logic module for calculating a target aim-point/area used by the firing processor to make a firing decision.