



(51) International Patent Classification:
B26B 21/52 (2006.01)

(21) International Application Number:
PCT/US2014/067171

(22) International Filing Date:
24 November 2014 (24.11.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/918,798 20 December 2013 (20.12.2013) US

(71) Applicant: **THE GILLETTE COMPANY** [US/US];
World Shaving Headquarters, IP/Legal Patent Department
- 3E, One Gillette Park, Boston, Massachusetts 02127
(US).

(72) Inventor: **HAWES, Christopher, Martin**; 460 Basings-
toke Road, Reading Berkshire RG2 9QE (GB).

(74) Agent: **GUFFEY, Timothy B.**; c/o The Procter & Gamble
Company, Global Patent Services, One Procter & Gamble
Plaza, C8-229, Cincinnati, Ohio 45202 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: REMOVABLE RAZOR CARTRIDGE HAVING MAGNETIC ELEMENTS

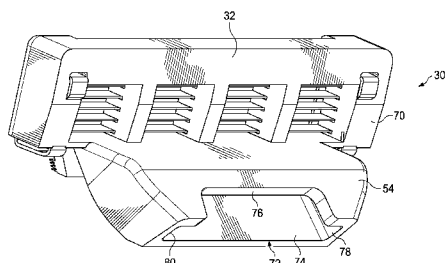


FIG. 2B

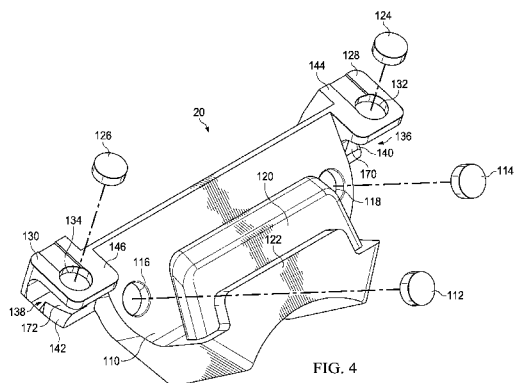


FIG. 4

(57) Abstract: A razor system 10 with a handle 12 having a connection base 20 with a housing mounting surface 110 and a housing 32 having a guard 34 and a cap 36, at least one blade 38 mounted to the housing between the guard and the cap, and an interconnect member 54. The interconnect member having a handle mounting surface 56 that magnetically engages the housing mounting surface securing the housing to the connection base during a shaving stroke. The interconnect member slidably engages the connection base in a direction generally transverse to a direction of a magnetic attraction force between the connection base and the interconnect member.