



- (51) International Patent Classification:
B60D 1/66 (2006.01) *B62D 53/08* (2006.01)
- (21) International Application Number:
PCT/NL2012/050227
- (22) International Filing Date:
5 April 2012 (05.04.2012)
- (25) Filing Language: Dutch
- (26) Publication Language: English
- (71) Applicants (for all designated States except US): **PEINE-MANN EQUIPMENT B.V.** [NL/NL]; Mandenmakerstraat 190, NL-3194 DG Hoogvliet (NL). **P.T.S. MACHINERY B.V.** [NL/NL]; Australieweg 2, NL-4561 PD Hulst (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **SPONSELEE, Wouter Marcel** [NL/NL]; Kerkdreef 10, NL-4581 CB Vogelwaarde (NL).
- (74) Agent: **LUTEN, Martin, Haaije**; Sweelinckplein 1, NL-2517 GK Den Haag (NL).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: TRAILER, SUPPORT WHEEL AXLE AND METHOD FOR UNCOUPLING AND COUPLING A TRAILER

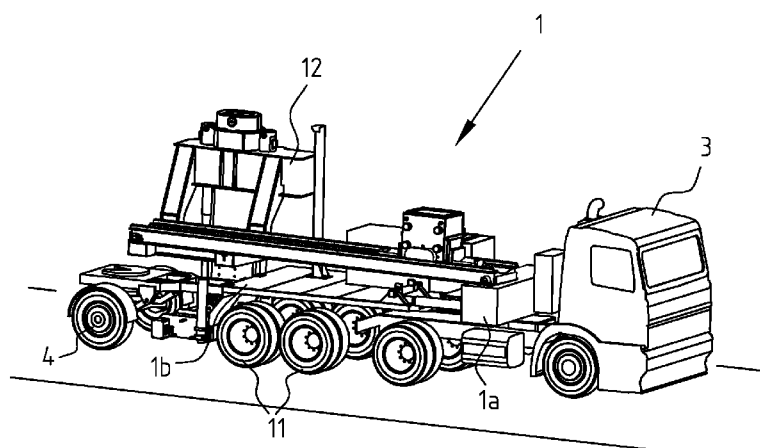


FIG. 1

(57) Abstract: Trailer particularly provided with a device for removing and/or arranging a bundle from and/or in a heat exchanger, comprising at least one wheel axle, wherein the trailer can be coupled to a tractive vehicle, wherein at least one support wheel axle is connectable to the trailer for the purpose of independently supporting the trailer in at least an uncoupled state thereof.