




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : E04D 1/20, 1/08, 1/30	A1	(11) International Publication Number: WO 99/41469 (43) International Publication Date: 19 August 1999 (19.08.99)
(21) International Application Number: PCT/IT99/00027 (22) International Filing Date: 8 February 1999 (08.02.99) (30) Priority Data: FI98A000030 10 February 1998 (10.02.98) IT (71)(72) Applicants and Inventors: BALDINI, Iole [IT/IT]; Via Zanobi da Strada, 37, I-50012 Ponte a Ema, Bagno a Ripoli (IT). MAZZOLI, Mariagrazia [IT/IT]; Via di Ripoli, 188, I-50126 Firenze (IT). (74) Agents: MANNUCCI, Gianfranco et al.; Via della Scala, 4, I-50123 Firenze (IT).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: ROOFING FOR BUILDINGS, WITH SYNTHETIC RESIN MOLDED COMPONENTS

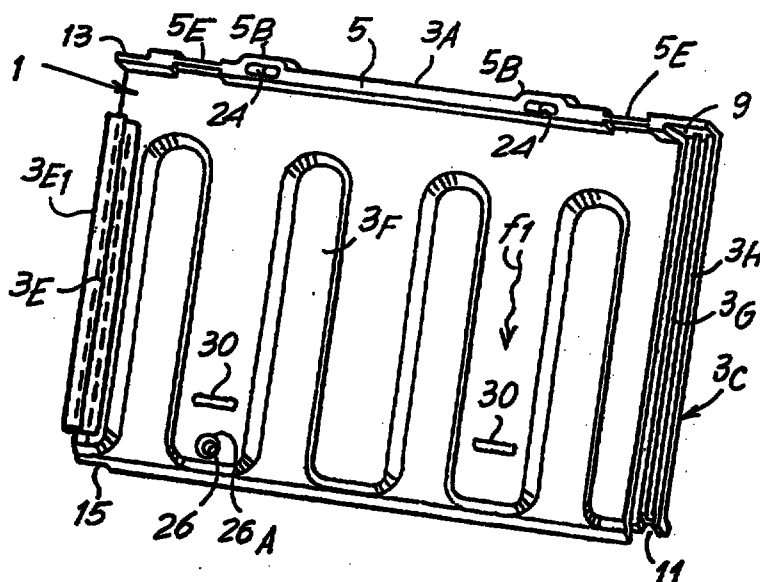

(57) Abstract

The tile, which can be made of stiff, molded, possibly recyclable synthetic resin, includes: along the edges (3A, 3B) which, when laid, are essentially perpendicular to the maximum slope line, an upper continuous contoured ridge (5) along the upper edge (3A) and a lower continuous contoured ridge (7) along the lower edge (3B); and along the edges (3C, 3E) which, when laid, are essentially parallel to the maximum slope line, contours (3G; 3H; 3K, 3L) which are complementary for partial overlapping; said ridges (5, 7) are step-shaped to engage, when laid, with horizontal continuity, a row of tiles below to the row of tiles above; for anchoring purposes, the tiles include a through hole (26) in the lower ridge (7) and at least one slot (24) in the upper ridge (5) to fasten two tiles from contiguous rows to a supporting structure (S) with a screw.