



(51) International Patent Classification:
E04G 9/02 (2006.01) *E04G 11/06* (2006.01)

(21) International Application Number:
PCT/CA2010/000860

(22) International Filing Date:
7 June 2010 (07.06.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2,668,598 11 June 2009 (11.06.2009) CA

(71) Applicant (for all designated States except US):
ALUMA SYSTEMS INC. [CA/CA]; 1811-66 Ave, Ed-
monton, Alberta T6P 1M5 (CA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **AU, Clarence Pang**
[CA/CA]; c/o Aluma Systems Inc., 55 Costa Road, Con-
cord, Ontario L4K 1M8 (CA).

(74) Agent: **HALL, Warren, S.**; all of Dennison Associates,
Suite 301, 133 Richmond Street West, Toronto, Ontario
M5H 2L7 (CA).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CONCRETE FORMING PANEL

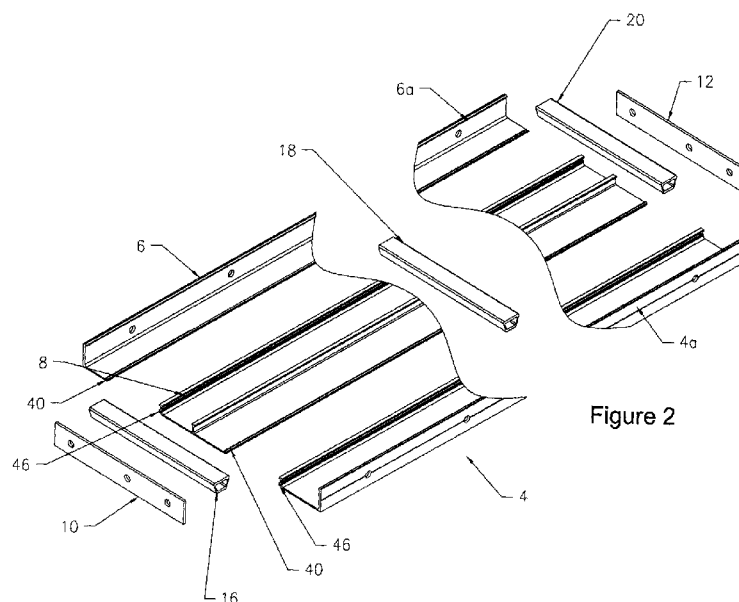


Figure 2

(57) Abstract: Concrete forming panels according to the present invention are formed using a series of interlocking panel sections mechanically connected at a forward face of the panel. The mechanical connection uses a hook portion of one section received in a slot portion of an adjacent section with a pivot and stop relation defining the planar forming face. A series of brace members extend across the panel sections on a rear surface and maintain engagement of the panel sections and reinforce the panel sections against deformation of the forming face during use of the panel. The arrangement is economical to manufacture in many different sizes as may be required by a customer. Some welding is used, however the mechanical connection greatly reduces the amount of welding required. Replacement sections can easily be used to repair damaged panels.