

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局



(10) 国际公布号

WO 2022/233056 A1

(43) 国际公布日

2022 年 11 月 10 日 (10.11.2022)

WIPO | PCT

(51) 国际专利分类号:

H04W 72/12 (2009.01) H04L 5/00 (2006.01)

中国北京市朝阳区望京街 10 号望京 SOHO 塔 2-1-0910, Beijing 100102 (CN)。

(21) 国际申请号:

PCT/CN2021/092219

(22) 国际申请日:

2021 年 5 月 7 日 (07.05.2021)

(25) 申请语言:

中文

(26) 公布语言:

中文

(71) 申请人: 北京小米移动软件有限公司 (BEIJING XIAOMI MOBILE SOFTWARE CO., LTD.) [CN/CN]; 中国北京市海淀区西二旗中路 33 号院 6 号楼 8 层 018 号, Beijing 100085 (CN)。

(72) 发明人: 李明菊 (LI, Mingju); 中国北京市海淀区西二旗中路 33 号院 6 号楼 8 层 018 号, Beijing 100085 (CN)。

(74) 代理人: 北京铎霖知识产权代理有限公司 (LI & N INTELLECTUAL PROPERTY AGENCY LTD);

(81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。

(84) 指定国 (除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG,

(54) Title: FEEDBACK METHOD, FEEDBACK APPARATUS AND STORAGE MEDIUM

(54) 发明名称: 反馈方法、反馈装置及存储介质

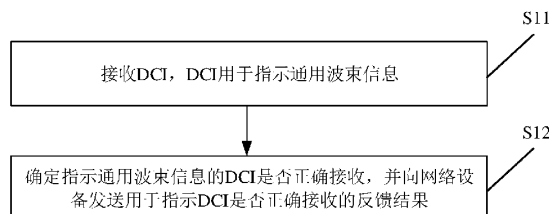


图 2

S11 Receive DCI, wherein the DCI is used for indicating common beam information

S12 Determine whether the DCI, which indicates the common beam information, is correctly received, and send, to a network device, a feedback result for indicating whether the DCI is correctly received

(57) Abstract: The present disclosure relates to a feedback method, a feedback apparatus and a storage medium. The feedback method is applied to a terminal, and comprises: receiving downlink control information, wherein the downlink control information is used for indicating common beam information; and determining whether the downlink control information is correctly received, and sending, to a network device, a feedback result for indicating whether the downlink control information is correctly received. The feedback method is applied to a network device end, and comprises: sending downlink control information, wherein the downlink control information is used for indicating common beam information; and receiving a feedback result for indicating whether the downlink control information is correctly received. By means of the present disclosure, whether downlink control information for indicating common beam information is correctly received by a terminal can be accurately learned, and HARQ ACK signaling overheads are reduced.

[见续页]

CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU,
IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT,
RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI,
CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布：

— 包括国际检索报告(条约第21条(3))。

(57) 摘要：本公开是关于一种反馈方法、反馈装置及存储介质。反馈方法应用于终端，包括：接收下行控制信息，所述下行控制信息用于指示通用波束信息；确定所述下行控制信息是否正确接收，并向网络设备发送用于指示所述下行控制信息是否正确接收的反馈结果。反馈方法应用于网络设备端，包括：发送下行控制信息，所述下行控制信息用于指示通用波束信息；接收用于指示所述下行控制信息是否正确接收的反馈结果。通过本公开可以准确获知用于通用波束信息指示的下行控制信息是否被终端正确接收，并减少HARQ ACK信令开销。