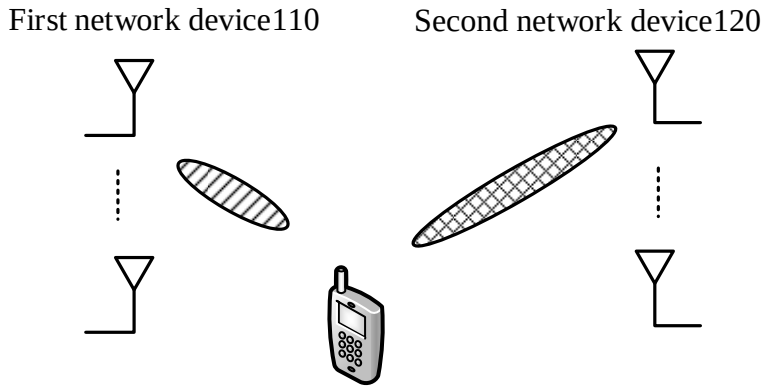
First network device110
Second network device120
Terminal device130

FIG. 1

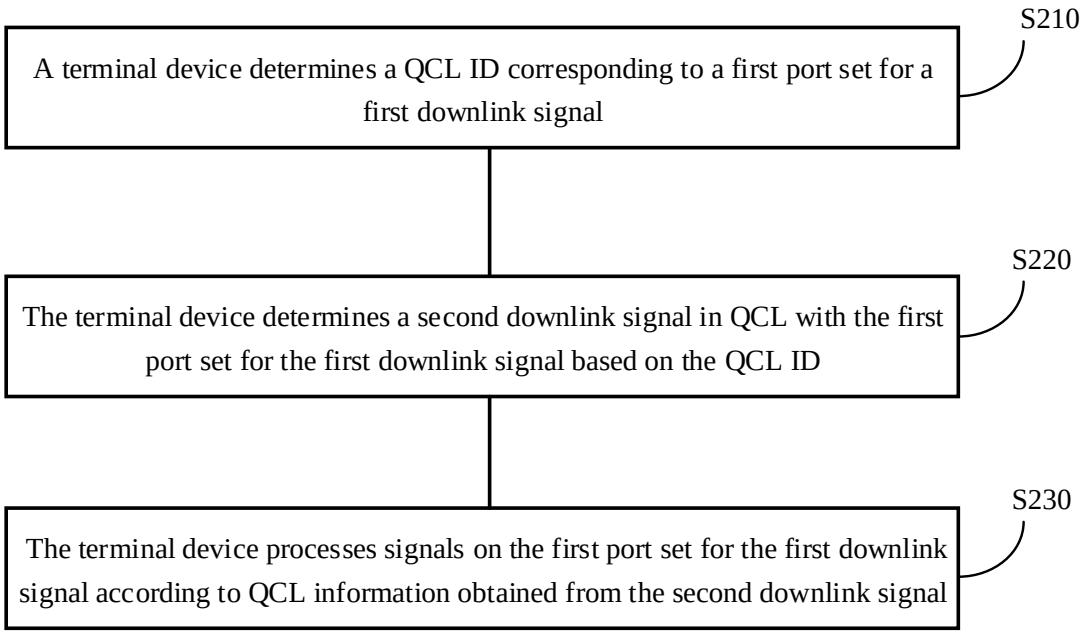
S210
A terminal device determines a QCL ID corresponding to a first port set for a first downlink signal
S220
The terminal device determines a second downlink signal in QCL with the first port set for the first downlink signal based on the QCL ID
S230
The terminal device processes signals on the first port set for the first downlink signal according to QCL information obtained from the second downlink signal

FIG. 2

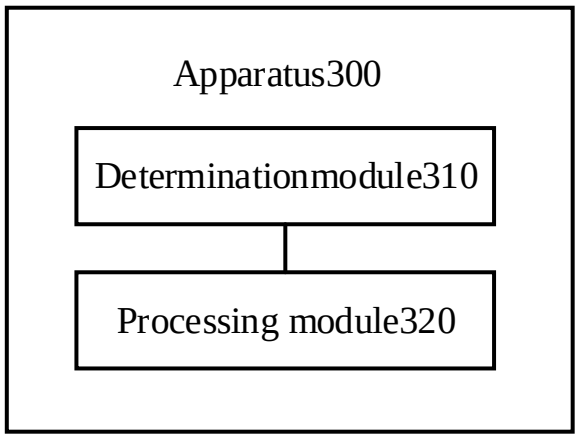
Apparatus300
Determinationmodule310
Processing module320

FIG. 3

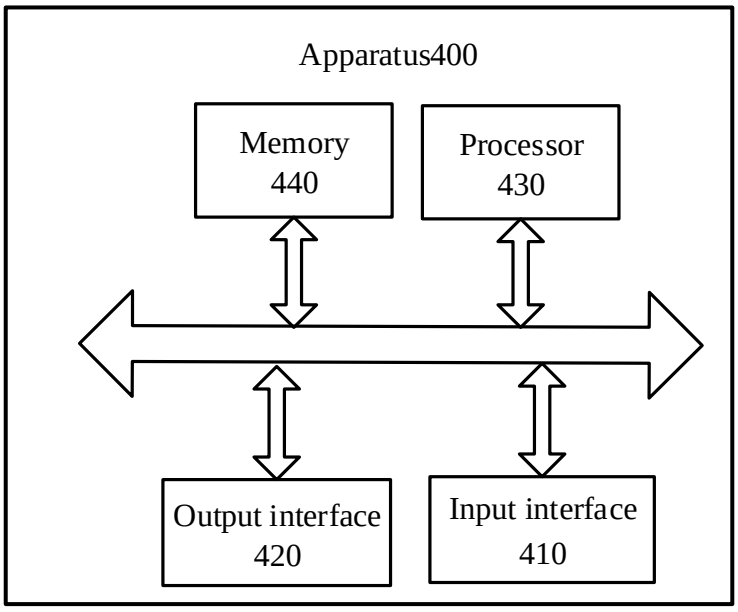
Apparatus400
Memory
440
Processor
430
Output interface
420
Input interface
410

FIG. 4