



(51) International Patent Classification:

B29C 70/78 (2006.01) **B65D 85/804** (2006.01)
B29C 41/20 (2006.01) **B29D 31/00** (2006.01)

(21) International Application Number:

PCT/EP2009/058411

(22) International Filing Date:

3 July 2009 (03.07.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

08160410.0 15 July 2008 (15.07.2008) EP

(71) Applicant (for all designated States except US):
NESTEC S.A. [CH/CH]; Avenue Nestlé 55, CH-1800
Vevey (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KAESER, Thomas**
[DE/CH]; rte de Brent 30 Fontanivent, CH-1817 Brent
(CH). **ABEGGLEN, Daniel** [CH/CH]; Le Bugnon,
CH-1439 Rances (CH). **SARIOGLU, Alp** [CH/TR];
Alkent sitesi, Tepecik Yolu, Blok Fulya 3, d:16, 34335
Etiler/Istanbul (TR). **KOLLEP, Alexandre** [CH/CH];
Chemin des Chênes 25, CH-1095 Lutry (CH). **BACCHI,**
Marco [CH/CH]; Aecherlistrasse 10, CH-6467 Schattdorf
(CH).

(74) Agent: **BORNE, Patrice**; Ave Nestlé 55, CH-1800
Vevey (CH).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT,
TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD FOR APPLYING A LIQUID SEAL RUBBER TO A CAPSULE

Fig. 1

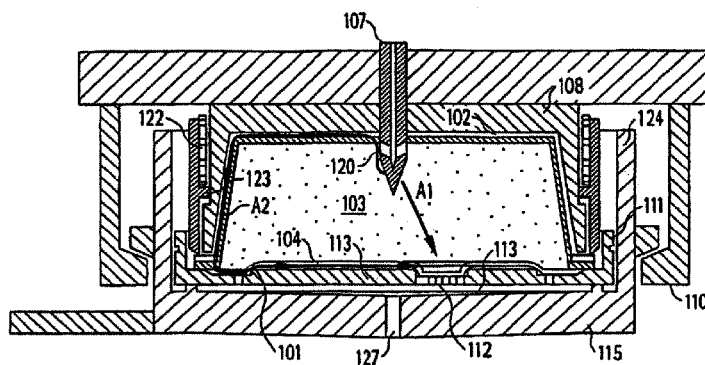

(57) Abstract: The present invention proposes a method for providing a rubber-elastic sealing member onto a capsule (1) intended for producing a beverage in a beverage production device, wherein the capsule has a body portion (3) having a side wall (3a) and a flange-like rim portion (2), wherein the rim portion (2) extends from the side wall (3a) of the body portion (3), the method comprising the steps of: - applying an uncured sealing composition (4) in a liquid or viscous state onto the rim portion (2) of the capsule (1), - heating said applied sealing composition (4) such that the sealing composition at least partially migrates towards the side wall (3a) until it reaches the side wall, and - curing the sealing composition (4) after the migration towards the side wall (3a).