

PROCESS FOR PRODUCING CYCLOHEXYLBENZENE

CROSS REFERENCE TO RELATED PATENT APPLICATIONS

[0001] This application claims priority from USSN 61/044,678, filed April 14, 2008, the
5 disclosure of which is fully incorporated herein by reference.

FIELD OF THE INVENTION

[0002] The present invention relates to a process for producing cyclohexylbenzene and optionally for converting the resultant cyclohexylbenzene into phenol and cyclohexanone.

BACKGROUND

10 [0003] Phenol is an important product in the chemical industry and is useful in, for example, the production of phenolic resins, bisphenol A, ϵ -caprolactam, adipic acid, and plasticizers.

[0004] Currently, the most common route for the production of phenol is the Hock process. This is a three-step process in which the first step involves alkylation of benzene
15 with propylene to produce cumene, followed by oxidation of the cumene to the corresponding hydroperoxide and then cleavage of the hydroperoxide to produce equimolar amounts of phenol and acetone. However, the world demand for phenol is growing more rapidly than that for acetone. In addition, the cost of propylene is likely to increase, due to a developing shortage of propylene. Thus, a process that uses higher alkenes instead of propylene as feed
20 and coproduces higher ketones, rather than acetone, may be an attractive alternative route to the production of phenols.

[0005] For example, oxidation of cyclohexylbenzene (analogous to cumene oxidation) could offer an alternative route for phenol production without the problem of acetone co-production. This alternative route co-produces cyclohexanone, which has a growing market
25 and is used as an industrial solvent, as an activator in oxidation reactions and in the production of adipic acid, cyclohexanone resins, cyclohexanone oxime, caprolactam and nylon 6. However, this alternative route requires the development of a commercially viable process for producing the cyclohexylbenzene precursor.

[0006] It has been known for many years that cyclohexylbenzene can be produced from
30 benzene by the process of hydroalkylation or reductive alkylation. In this process, benzene is reacted with hydrogen in the presence of a catalyst such that the benzene undergoes partial hydrogenation to produce cyclohexene which then alkylates the benzene starting material. Thus U.S. Patent Nos. 4,094,918 and 4,177,165 disclose hydroalkylation of aromatic

hydrocarbons over catalysts which comprise nickel- and rare earth-treated zeolites and a palladium promoter. Similarly, U.S. Patent Nos. 4,122,125 and 4,206,082 disclose the use of ruthenium and nickel compounds supported on rare earth-treated zeolites as aromatic hydroalkylation catalysts. The zeolites employed in these prior art processes are zeolites X and Y. In addition, U.S. Patent No. 5,053,571 proposes the use of ruthenium and nickel supported on zeolite beta as the aromatic hydroalkylation catalyst. However, these earlier proposals for the hydroalkylation of benzene suffer from the problems that the selectivity to cyclohexylbenzene is low, particularly at economically viable benzene conversion rates, and that large quantities of unwanted by-products are produced.

[0007] More recently, U.S. Patent No. 6,037,513 has disclosed that cyclohexylbenzene selectivity in the hydroalkylation of benzene can be improved by contacting the benzene and hydrogen with a bifunctional catalyst comprising at least one hydrogenation metal and a molecular sieve of the MCM-22 family. The hydrogenation metal is preferably selected from palladium, ruthenium, nickel, cobalt and mixtures thereof and the contacting step is conducted at a temperature of about 50 to 350°C, a pressure of about 100 to 7000 kPa, a benzene to hydrogen molar ratio of about 0.01 to 100 and a WHSV of about 0.01 to 100. The '513 patent discloses that the resultant cyclohexylbenzene can then be oxidized to the corresponding hydroperoxide and the peroxide decomposed to the desired phenol and cyclohexanone.

[0008] However, despite recent advances, the hydroalkylation of benzene to produce cyclohexylbenzene has still not been commercialized. One problem is that the chemistry involved in the hydroalkylation reaction is quite complicated and tends to produce cyclohexane, methylcyclopentane, methylcyclopentylbenzene, methylcyclopentylcyclohexylbenzene, and dicyclohexylbenzenes in addition to the desired cyclohexylbenzene.

While dicyclohexylbenzenes can be transalkylated with benzene to produce additional cyclohexylbenzene, for a commercially viable process it is necessary to minimize the production of low-value impurities that are expensive to remove and/or process. Of these impurities, methylcyclopentane and methylcyclopentylbenzene are particularly undesirable since their close boiling points (relative to cyclohexane/benzene and cyclohexylbenzene, respectively) make them very difficult to separate from cyclohexylbenzene. Moreover, although cyclohexane can be converted back to benzene by dehydrogenation, this represents a costly and circuitous path to feed retrieval.

[0009] Given these complexities, there has been a significant question as to whether the production of phenol via benzene hydroalkylation to cyclohexylbenzene could be an economically viable alternative to the conventional route via cumene. However, as a result of extensive research, a combination of catalyst composition and process parameters has now
5 been established that offers a benzene hydroalkylation process with a high cyclohexylbenzene yield coupled with a low production of undesirable impurities.

SUMMARY

[0010] In one aspect, the invention resides in a process for producing cyclohexylbenzene, the process comprising contacting benzene and hydrogen under hydroalkylation conditions
10 with a catalyst system comprising a MCM-22 family molecular sieve and at least one hydrogenation metal, wherein said conditions comprise a temperature of about 140°C to about 175°C, a pressure of about 135 psig to about 175 psig (931 kPag, 1032 kPa to 1207 kPag, 1308 kPa), a hydrogen to benzene molar ratio of about 0.30 to about 0.65 and a weight hourly space velocity of benzene of about 0.26 to about 1.05 hr⁻¹.

15 [0011] Conveniently, said conditions comprise a temperature of about 150°C to about 160°C and/or a pressure of about 145 psig to about 155 psig (1000 kPag to 1069 kPag) and/or a hydrogen to benzene molar ratio of about 0.45 to about 0.64 and/or a weight hourly space velocity of benzene of about 0.3 to about 0.6 hr⁻¹.

[0012] Conveniently, said MCM-22 family molecular sieve has an X-ray diffraction
20 pattern including d-spacing maxima at 12.4±0.25, 6.9±0.15, 3.57±0.07 and 3.42±0.07 Angstrom. In one embodiment, the MCM-22 family molecular sieve is selected from MCM-22, PSH-3, SSZ-25, ERB-1, ITQ-1, ITQ-2, MCM-36, MCM-49, MCM-56, UZM-8, and mixtures of any two or more thereof, especially from MCM-22, MCM-49, MCM-56 and combinations of any two or more thereof.

25 [0013] Conveniently, said at least one hydrogenation metal is selected from palladium, ruthenium, nickel, zinc, tin and cobalt, and preferably is palladium. Generally, said at least one hydrogenation metal is present in an amount between about 0.05 and about 10 %, such as between about 0.1 and about 5 %, by weight of the catalyst system.

[0014] In one embodiment, at least 50 wt%, such as at least 75 wt%, and preferably
30 substantially all such as greater than 95, 98 or 99 wt% of said hydrogenation metal is supported on an inorganic oxide that is different from said molecular sieve. Conveniently, the inorganic oxide comprises an oxide of at least one element selected from Groups 2, 4, 13 and 14 of the Periodic Table of Elements, such as alumina and/or titania and/or zirconia.

[0015] In a further aspect, the invention resides in a method for coproducing phenol and cyclohexanone, the method comprising producing cyclohexylbenzene by the process described herein, oxidizing the cyclohexylbenzene to produce cyclohexylbenzene hydroperoxide and cleaving the cyclohexylbenzene hydroperoxide to produce phenol and
5 cyclohexanone. In a preferred embodiment, the method further comprises dehydrogenating the cyclohexane to produce further phenol.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] Figures 1(a) to (d) are graphs plotting the effect of the process variables temperature, pressure, hydrogen to benzene molar ratio and weight hourly space velocity of
10 benzene on the weight % benzene conversion (Figure 1(a)), cyclohexane (CH) selectivity (Figure 1(b)), cyclohexylbenzene (CHB) selectivity (Figure 1(c)), and dicyclohexylbenzene (DCHB) selectivity (Figure 1(d)).


[0017] Figures 2(a) to (d) are graphs plotting the effect of the process variables temperature, pressure, hydrogen to benzene molar ratio and weight hourly space velocity of
15 benzene on total selectivity to impurities other than CH and DCHB (Figure 2(a)), methylcyclopentane (MCP) selectivity (Figure 2(b)), methylcyclopentylbenzene (MCPB) selectivity (Figure 2(c)), and methylcyclopentyl-cyclohexylbenzene (MCPCHB) selectivity (Figure 2(d)).

DETAILED DESCRIPTION OF THE EMBODIMENTS

20 [0018] Described herein is a process for the hydroalkylation of benzene to produce cyclohexylbenzene and, in a preferred embodiment of the invention, the conversion of the cyclohexylbenzene in a second step to cyclohexanone and phenol. Insofar as the hydroalkylation process produces dicyclohexylbenzene in addition to the desired monocyclohexylbenzene product, the process can include the further step of transalkylating the
25 dicyclohexylbenzene with additional benzene to produce additional monocyclohexylbenzene product.

Benzene Hydroalkylation

[0019] The present process (which comprises the first process step in the above-mentioned preferred embodiment) comprises contacting benzene with hydrogen under hydroalkylation conditions in the presence of a hydroalkylation catalyst whereby the benzene undergoes the following partial hydrogenation/alkylation reaction to produce cyclohexylbenzene (CHB):

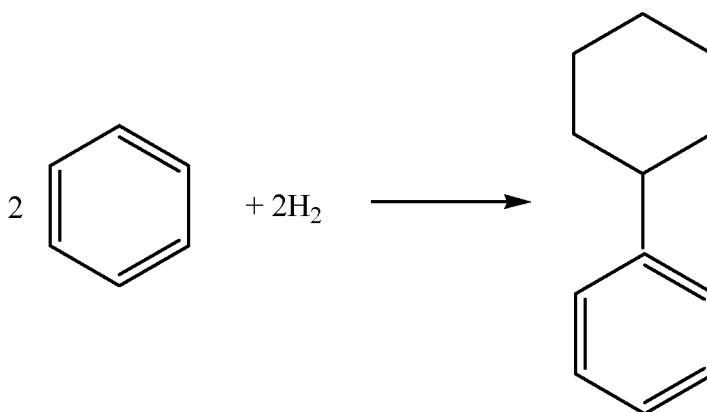

[0020] Competing reactions include the complete saturation of the benzene to produce cyclohexane (CH), dialkylation to produce dicyclohexylbenzene (DCHB) and reorganization/alkylation reactions to produce impurities, such as methylcyclopentane (MCP), methylcyclopentylbenzene (MCPB), and methylcyclopentyl-cyclohexylbenzene (MCPCHB). Although dicyclohexylbenzene can be transalkylated to produce additional CHB product, conversion to cyclohexane represents loss of valuable feed, whereas impurities such as methylcyclopentane (MCP) and methylcyclopentylbenzene (MCPB) are particularly undesirable since their boiling points are very close to that of CHB so that it is very difficult to separate MCP and MCPB from CHB. It is therefore important to minimize the production of DCHB, MCP and MCPB impurities in the hydroalkylation reaction, so that the concentrations of such materials in the hydroalkylation product mixture (also termed herein the hydroalkylation effluent) are kept to acceptably low levels.

[0021] According to the present invention, there is provided an optimized benzene hydroalkylation process which is effective to convert benzene to cyclohexylbenzene (CHB) with high selectivity and at high yield, and in which the production of cyclohexane is preferably less than or equal to 3 wt% of the total hydroalkylation effluent and/or the production of MCP, MCPB and MCPCHB in combination is preferably less than or equal to 5 wt% of the total hydroalkylation effluent. Typically, the production of dicyclohexylbenzene (DCHB) is less than 15 wt% of the total hydroalkylation effluent.

[0022] Any commercially available benzene feed can be used in the present hydroalkylation process, but preferably the benzene has a purity level of at least 99 wt%. Similarly, although the source of hydrogen is not critical, it is generally desirable that the hydrogen is at least 99 wt% pure.

5 [0023] Conveniently, the total feed to the hydroalkylation step contains less than 1000 ppm, such as less than 500 ppm, for example less than 100 ppm by weight, water and/or less than 100 ppm, such as less than 30 ppm, for example less than 3 ppm by weight, sulfur and/or less than 10 ppm, such as less than 1 ppm, for example less than 0.1 ppm by weight, nitrogen.

[0024] The hydroalkylation reaction can be conducted in a wide range of reactor
10 configurations including fixed bed, slurry reactors, and/or catalytic distillation towers. In addition, the hydroalkylation reaction can be conducted in a single reaction zone or in a plurality of reaction zones, in which at least the hydrogen is introduced to the reaction in stages. Irrespective of whether the hydrogen is fed to the reaction continuously or in stages, it is important that the ratio of the total number of moles of hydrogen fed to the reaction to the
15 number of moles of benzene fed to the reaction is between 0.30:1 and 0.65:1, such as between about 0.45:1 and about 0.64:1. In particular, as will be come apparent from the ensuing Example, controlling the hydrogen to benzene molar ratio within these limits maximizes the yield of cyclohexylbenzene without significantly increasing the yield of dicyclohexylbenzene.

20 [0025] The catalyst employed in the hydroalkylation reaction is a bifunctional catalyst comprising a molecular sieve of the MCM-22 family and a hydrogenation metal. The term "MCM-22 family material" (or "material of the MCM-22 family" or "molecular sieve of the MCM-22 family"), as used herein, includes one or more of:

- 25 • molecular sieves made from a common first degree crystalline building block unit cell, which unit cell has the MWW framework topology. (A unit cell is a spatial arrangement of atoms which if tiled in three-dimensional space describes the crystal structure. Such crystal structures are discussed in the "Atlas of Zeolite Framework Types", Fifth edition, 2001, the entire content of which is incorporated as reference);
- 30 • molecular sieves made from a common second degree building block, being a 2-dimensional tiling of such MWW framework topology unit cells, forming a monolayer of one unit cell thickness, preferably one c-unit cell thickness;

- molecular sieves made from common second degree building blocks, being layers of one or more than one unit cell thickness, wherein the layer of more than one unit cell thickness is made from stacking, packing, or binding at least two monolayers of one unit cell thickness. The stacking of such second degree building blocks can be in a regular fashion, an irregular fashion, a random fashion, or any combination thereof; and
- molecular sieves made by any regular or random 2-dimensional or 3-dimensional combination of unit cells having the MWW framework topology.

[0026] Molecular sieves of MCM-22 family generally have an X-ray diffraction pattern including d-spacing maxima at 12.4 ± 0.25 , 6.9 ± 0.15 , 3.57 ± 0.07 and 3.42 ± 0.07 Angstrom. The X-ray diffraction data used to characterize the material (b) are obtained by standard techniques such as using the K-alpha doublet of copper as the incident radiation and a diffractometer equipped with a scintillation counter and associated computer as the collection system. Molecular sieves of MCM-22 family include MCM-22 (described in U.S. Patent No. 4,954,325), PSH-3 (described in U.S. Patent No. 4,439,409), SSZ-25 (described in U.S. Patent No. 4,826,667), ERB-1 (described in European Patent No. 0293032), ITQ-1 (described in U.S. Patent No. 6,077,498), ITQ-2 (described in International Patent Publication No. WO97/17290), MCM-36 (described in U.S. Patent No. 5,250,277), MCM-49 (described in U.S. Patent No. 5,236,575), MCM-56 (described in U.S. Patent No. 5,362,697), UZM-8 (described in U.S. Patent No. 6,756,030), and mixtures of any two or more thereof. Preferably, the molecular sieve is selected from (a) MCM-49, (b) MCM-56 and (c) isotypes of MCM-49 and MCM-56, such as ITQ-2.

[0027] Any known hydrogenation metal can be employed in the present hydroalkylation catalyst although suitable metals include palladium, ruthenium, nickel, zinc, tin and cobalt, with palladium being particularly advantageous. Generally, the amount of hydrogenation metal present in the catalyst is preferred to be between about 0.05 and about 10 wt %, such as between about 0.1 and about 5 wt %, of the catalyst system. In one embodiment, where the MCM-22 family molecular sieve is an aluminosilicate, the amount of hydrogenation metal present is such that the molar ratio of the aluminum in the molecular sieve to the hydrogenation metal is from about 1.5 to about 1500, for example from about 75 to about 750, such as from about 100 to about 300.

[0028] The hydrogenation metal may be directly supported on the MCM-22 family molecular sieve by, for example, impregnation or ion exchange. However, in a more

preferred embodiment, at least 50 wt%, for example at least 75wt%, and particularly preferably substantially all e.g. at least 95, 98 or 99 wt% of the hydrogenation metal is supported on an inorganic oxide separate (i.e. different) from but composited with the molecular sieve. In particular, it is found that by supporting the hydrogenation metal on the
5 inorganic oxide, the activity of the catalyst and its selectivity to cyclohexylbenzene and dicyclohexylbenzene are increased as compared with an equivalent catalyst in which the hydrogenation metal is supported on the molecular sieve.

[0029] The inorganic oxide employed in such a composite hydroalkylation catalyst is not narrowly defined provided it is stable and inert under the conditions of the hydroalkylation
10 reaction. Suitable inorganic oxides include oxides of Groups 2, 4, 13 and 14 of the Periodic Table of Elements, such as alumina, titania, and/or zirconia. As used herein, the numbering scheme for the Periodic Table Groups is as disclosed in Chemical and Engineering News, 63(5), 27 (1985).

[0030] The hydrogenation metal is deposited on the inorganic oxide, conveniently by
15 impregnation, before the metal-containing inorganic oxide is composited with said molecular sieve. Typically, the catalyst composite is produced by co-pelletization, in which a mixture of the molecular sieve and the metal-containing inorganic oxide are formed into pellets at high pressure (generally about 350 to about 350,000 kPa), or by co-extrusion, in which a slurry of the molecular sieve and the metal-containing inorganic oxide, optionally together
20 with a separate binder, are forced through a die. If necessary, additional hydrogenation metal can subsequently be deposited on the resultant catalyst composite.

[0031] Whether a separate inorganic oxide is used with the molecular sieve or not, the catalyst system may additionally be combined with a binder to facilitate its use in the process of the invention. Suitable binder materials include synthetic or naturally occurring substances
25 as well as inorganic materials such as clay, silica and/or metal oxides. The latter may be either naturally occurring or in the form of gelatinous precipitates or gels including mixtures of silica and metal oxides. Naturally occurring clays which can be used as a binder include those of the montmorillonite and kaolin families, which families include the subbentonites and the kaolins commonly known as Dixie, McNamee, Georgia and Florida clays or others in
30 which the main mineral constituent is halloysite, kaolinite, dickite, nacrite or anauxite. Such clays can be used in the raw state as originally mined or initially subjected to calcination, acid treatment or chemical modification. Suitable metal oxide binders include silica, alumina, zirconia, titania, silica-alumina, silica-magnesia, silica-zirconia, silica-thoria, silica-beryllia

and silica-titania as well as ternary compositions such as silica-alumina-thoria, silica-alumina-zirconia, silica-alumina-magnesia and silica-magnesia-zirconia.

[0032] The conditions employed in the present process are important in achieving the desired selectivity to cyclohexylbenzene and include a temperature of about 140°C to about 175°C, particularly about 150°C to about 160°C, a pressure of about 931 kPag to 1207 kPag (135 psig to about 175 psig), particularly about 1000 kPag to 1069kPag (145 psig to about 155 psig), a hydrogen to benzene molar ratio of about 0.30 to about 0.65, particularly about 0.45 to about 0.64, and a weight hourly space velocity of benzene of about 0.26 to about 1.05 hr⁻¹, particularly about 0.3 to about 0.6 hr⁻¹.

10 [0033] Using these conditions and an MCM-22 family zeolite, the present hydroalkylation process is effective to convert benzene to the product mix shown in Table 1 below (% by weight).

Table 1

	Preferred Range	More Preferred Range
Benzene Conversion	30 - 55%	40 - 50 %
CHB Yield	25 - 40%	30-35 %
DCHB Yield	5-13 %	6-9 %
Cyclohexane Yield	1.0 - 2.5 %	1.5-2.0 %
Other Byproducts Yield (including MCP, MCPB, MCP-CHB)	1.5 - 4.0%	1.8 - 2.5%
MCP Yield	0.04-0.2 %	0.045-0.1 %
MCPB Yield	0.7-1.2 %	0.8-1 %
MCP-CHB Yield	0.5-1.5 %	0.6-1.4 %

15 **Dicyclohexylbenzene Transalkylation**

[0034] Although the hydroalkylation step is highly selective towards cyclohexylbenzene, it will be seen from Table 1 that the effluent from the hydroalkylation reaction will normally contain some dialkylated products, as well as unreacted aromatic feed and the desired monoalkylated species. The unreacted aromatic feed is normally recovered by distillation and recycled to the alkylation reactor. The bottoms from the benzene distillation are further distilled to separate the monocyclohexylbenzene product from any dicyclohexylbenzene and other heavies. Depending on the amount of dicyclohexylbenzene present in the reaction

effluent, it may be desirable to transalkylate the dicyclohexylbenzene with additional benzene to maximize the production of the desired monoalkylated species.

[0035] Transalkylation with additional benzene is typically effected in a transalkylation reactor, separate from the hydroalkylation reactor, over a suitable transalkylation catalyst, such as a molecular sieve of the MCM-22 family, zeolite beta, MCM-68 (see U.S. Patent No. 6,014,018), zeolite Y or mordenite. The transalkylation reaction is typically conducted under at least partial liquid phase conditions, which suitably include a temperature of about 100 to about 300°C, a pressure of about 800 to about 3500 kPa, a weight hourly space velocity of about 1 to about 10 hr⁻¹ on total feed, and a benzene/dicyclohexylbenzene weight ratio about of 1:1 to about 5:1.

Cyclohexylbenzene Oxidation

[0036] In a preferred embodiment, the cyclohexylbenzene produced by the process of that invention is further converted. Thus, in order to convert the cyclohexylbenzene into phenol and cyclohexanone, the cyclohexylbenzene is initially oxidized to the corresponding hydroperoxide. This is accomplished by introducing an oxygen-containing gas, such as air, into a liquid phase containing the cyclohexylbenzene. Unlike cumene, atmospheric air oxidation of cyclohexylbenzene in the absence of a catalyst is very slow and hence the oxidation is normally conducted in the presence of a catalyst.

[0037] Suitable catalysts for the cyclohexylbenzene oxidation step are the N-hydroxy substituted cyclic imides described in U.S. Patent No. 6,720,462 and incorporated herein by reference, such as N-hydroxyphthalimide, 4-amino-N-hydroxyphthalimide, 3-amino-N-hydroxyphthalimide, tetrabromo-N-hydroxyphthalimide, tetrachloro-N-hydroxyphthalimide, N-hydroxyhetimide, N-hydroxyhimimide, N-hydroxytrimellitide, N-hydroxybenzene-1,2,4-tricarboximide, N,N'-dihydroxy(pyromellitic diimide), N,N'-dihydroxy(benzophenone-3,3',4,4'-tetracarboxylic diimide), N-hydroxymaleimide, pyridine-2,3-dicarboximide, N-hydroxysuccinimide, N-hydroxy(tartaric imide), N-hydroxy-5-norbornene-2,3-dicarboximide, exo-N-hydroxy-7-oxabicyclo[2.2.1]hept-5-ene-2,3-dicarboximide, N-hydroxy-cis-cyclohexane-1,2-dicarboximide, N-hydroxy-cis-4-cyclohexene-1,2-dicarboximide, N-hydroxynaphthalimide sodium salt or N-hydroxy-o-benzene-disulphonimide. Preferably, the catalyst is N-hydroxyphthalimide. Another suitable catalyst is N,N',N''-trihydroxyisocyanuric acid.

[0038] These catalytic materials can be used either alone or in the presence of a free radical initiator and can be used as liquid-phase, homogeneous catalysts or can be supported

on a solid carrier to provide a heterogeneous catalyst. Typically, the N-hydroxy substituted cyclic imide or the N,N',N''-trihydroxyisocyanuric acid is employed in an amount of from 0.0001 wt% to 15 wt %, such as from 0.001 to 5 wt %, of the cyclohexylbenzene.

[0039] Suitable conditions for the oxidation step include a temperature between about 5 70°C and about 200°C, such as about 90°C to about 130°C, and a pressure of about 50 to 10,000 kPa. Any oxygen-containing gas, preferably air, can be used as the oxidizing medium. The reaction can take place in batch reactors or continuous flow reactors. A basic buffering agent may be added to react with acidic by-products that may form during the oxidation. In addition, an aqueous phase may be introduced, which can help dissolve basic 10 compounds, such as sodium carbonate.

Hydroperoxide Cleavage

[0040] The final reactive step in the conversion of the cyclohexylbenzene into phenol and cyclohexanone involves cleavage of the cyclohexylbenzene hydroperoxide, which is conveniently effected by contacting the hydroperoxide with a catalyst in the liquid phase at a 15 temperature of about 20°C to about 150°C, such as about 40°C to about 120°C, and/or a pressure of about 50 to about 2,500 kPa, such as about 100 to about 1000 kPa. The cyclohexylbenzene hydroperoxide is preferably diluted in an organic solvent inert to the cleavage reaction, such as methyl ethyl ketone, cyclohexanone, phenol or cyclohexylbenzene, to assist in heat removal. The cleavage reaction is conveniently conducted in a catalytic 20 distillation unit.

[0041] The catalyst employed in the cleavage step can be a homogeneous catalyst or a heterogeneous catalyst.

[0042] Suitable homogeneous cleavage catalysts include sulfuric acid, perchloric acid, phosphoric acid, hydrochloric acid and p-toluenesulfonic acid. Ferric chloride, boron 25 trifluoride, sulfur dioxide and sulfur trioxide are also effective homogeneous cleavage catalysts. The preferred homogeneous cleavage catalyst is sulfuric acid, with preferred concentrations in the range of 0.05 to 0.5 wt%. For a homogeneous acid catalyst, a neutralization step preferably follows the cleavage step. Such a neutralization step typically involves contact with a basic component, with subsequent decanting of a salt-enriched 30 aqueous phase.

[0043] A suitable heterogeneous catalyst for use in the cleavage of cyclohexylbenzene hydroperoxide includes a smectite clay, such as an acidic montmorillonite silica-alumina

clay, as described in U.S. Patent No. 4,870,217, the entire disclosure of which is incorporated herein by reference.

[0044] The crude cyclohexanone and crude phenol from the cleavage step may be subjected to further purification to produce purified cyclohexanone and phenol. A suitable
5 purification process includes, but is not limited to, a series of distillation towers to separate the cyclohexanone and phenol from other species. The crude or purified cyclohexanone may itself be subjected to dehydrogenation in order to convert it to phenol. Such dehydrogenation may be performed, for example, over a catalyst such as platinum, nickel or palladium.

[0045] The following Examples are given for illustrative purposes and do not limit the
10 scope of the invention.

Example 1: Catalyst Preparation

[0046] A catalyst was prepared by co-pelletizing a Pd catalyst with a MCM-49 catalyst. The Pd catalyst was prepared by impregnating 5 grams of gamma alumina with a palladium nitrate solution and then calcining the Pd impregnated alumina at 350°C for 3 hours in air.
15 The Pd loading on the alumina was 0.3 wt%. The MCM-49 catalyst was prepared by crushing an extrudate which had 80 wt % MCM-49 and 20 wt % alumina to 0.042 cm (1/60") or finer particles. The Pd/Al₂O₃ catalyst was then mixed with the crushed MCM-49/Al₂O₃ in the ratio of 1:3 by weight and then pelletized using a hand press under 138MPag (20,000 psig) to form the co-pelletized catalyst. The catalyst was then sized to mesh openings of
20 from 0.250 mm to 0.149mm (60-100 mesh) for testing.

Example 2: Benzene Hydroalkylation

[0047] Eight grams of the catalyst prepared in Example 1 was charged to a stainless steel fixed-bed micro-reactor. The reactor had a 1.27 cm (1/2 inch) inside diameter with a 0.32cm (1/8 inch) thermowell in the center throughout the catalyst bed. The catalyst was pretreated
25 with 100 cc/min of hydrogen for 2 hours at 300°C and 1 atm. After cooling to 155°C in hydrogen, benzene was fed into the reactor through a syringe pump at 60 cc/hour for 1 hr while the reactor pressure was increased to 1034kPag (150 psig). The benzene feed rate was then reduced to 0.52 WHSV and the hydrogen/benzene molar ratio was adjusted to 1.28. Liquid products were collected in a cold product trap and analyzed off-line. Various test
30 conditions were used to evaluate catalyst performance by varying four process variables. Table 2 shows these process variables and their ranges. A total of 36 test conditions were used to study CHB production.

Table 2

Variable	Total Conditions	Minimum	Maximum	Mean	Std. deviation
Temperature, °C	36	125	175	148.28	13.40
Pressure, kPag	36	862	4137	1796	1141
Pressure, psig	36	125	600	260.56	165.55
H ₂ /Benzene Molar Ratio	36	0.32	1.28	0.76	0.33
Benzene WHSV	36	0.26	1.05	0.60	0.24

[0048] Results of catalyst performance are shown in Tables 3 to 6, in which CHB
5 represents cyclohexylbenzene, DCHB represents dicyclohexylbenzene, MCPB represents
methylcyclopentylbenzene and MCP-CHB represents methylcyclopentyl-cyclohexylbenzene,
Table 3 shows test results obtained under test condition 1 to condition 10; and Tables 4, 5 and
6 show test results obtained under test conditions 11 to 19, 20 to 28 and 29 to 36,
respectively.

2008EM102-PCT

Table 3

Test Condition No.	1	2	3	4	5	6	7	8	9	10
Temperature, °C	150	150	150	125	125	150	150	150	150	138
Pressure, kPag	1034	1034	1034	1207	1207	862	862	1207	1207	1034
Pressure, psig	150	150	150	175	175	125	125	175	175	150
H ₂ /Benzene Molar Ratio	0.45	0.63	1.00	0.46	0.63	0.45	0.63	0.45	0.63	0.63
Benzene WHSV	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52
Benzene Conv, %	37.5	43.1	47.6	24.0	24.9	36.7	36.2	38.9	49.5	32.6
<u>Selectivity, wt%</u>										
Cyclohexane	4.0	4.5	4.8	7.6	7.6	4.8	3.7	5.4	5.1	5.4
CHB	79.0	72.5	63.8	82.4	81.5	77.7	73.0	78.0	71.8	78.9
DCHB	13.2	18.5	24.3	8.3	6.5	13.8	18.2	13.1	17.3	12.8
Others	3.8	4.5	7.1	1.7	4.5	3.7	5.1	3.5	5.8	2.9
Sum	100	100	100	100	100	100	100	100	100	100
CHB + DCHB	92.2	91.0	88.1	90.7	88.0	91.5	91.2	91.1	89.1	91.7
<u>Product Yield, %</u>										
Cyclohexane	1.5	1.9	2.3	1.8	1.9	1.8	1.3	2.1	2.5	1.8
CHB	29.6	31.2	30.4	19.8	20.3	28.5	26.4	30.3	35.5	25.7
DCHB	5.0	8.0	11.6	2.0	1.6	5.1	6.6	5.1	8.6	4.2
CHB+DCHB	34.6	39.2	41.9	21.8	21.9	33.6	33.0	35.4	44.1	29.9

2008EM102-PCT

Table 4

Test Condition No.	11	12	13	14	15	16	17	18	19
Days on Stream	2.7	5.7	8.7	12.2	15.7	23.7	27.7	28.7	31.2
Temperature, °C	150	150	150	150	150	150	150	150	150
Pressure, kPag	1138	2069	2069	1138	1034	1034	1034	2069	4137
Pressure, psig	165	300	300	165	150	150	150	300	600
H ₂ /Benzene Molar Ratio	1.28	1.28	1.28	1.28	0.64	0.64	1.28	0.64	0.64
Benzene WHSV	0.52	0.52	1.05	0.26	0.52	0.26	0.52	0.52	1.05
Benzene Conv, %	45.7	68.5	38.1	68.5	33.6	41.9	40.6	53.5	51.6
Hydrogen Conv, %	48.6	75.0	30.4	98.0	86.8	97.0	30.6	97.3	96.5
<u>Selectivity, wt%</u>									
Methylcyclopentane	0.40	0.30	0.09	0.26	0.09	0.13	0.27	0.18	0.11
Cyclohexane	4.0	6.1	5.1	6.0	4.2	5.0	3.9	5.9	10.4
CHB	63.9	58.6	71.8	58.4	75.8	72.8	61.5	69.1	67.5
Methylcyclopentyl-benzene	2.5	2.2	2.0	2.3	2.1	2.4	2.5	2.3	1.9
DCHB	24.5	27.6	18.2	27.3	15.5	16.6	26.4	19.4	17.2
Methylcyclopentyl-cyclohexylbenzene	3.1	3.1	2.2	3.6	1.8	2.4	3.3	2.2	2.3
Others	1.4	2.0	0.6	2.1	0.4	0.4	1.9	0.7	0.5
Sum	100	100	100	100	100	100	100	100	100
CHB + DCHB sel, %	88.4	86.2	90.0	85.6	91.3	89.4	88.0	88.6	84.7
<u>Product Yield, %</u>									
Cyclohexane	1.8	3.0	2.5	2.9	2.0	2.4	1.9	2.9	5.1
CHB	29.2	28.6	35.0	28.4	37.0	35.5	30.0	33.7	32.9
DCHB	11.2	13.5	8.9	13.3	7.5	8.1	12.9	9.5	8.4
CHB+DCHB	40.4	42.0	43.9	41.7	44.5	43.6	42.9	43.2	41.3

2008EM102-PCT

Table 5

Test Condition No.	20	21	22	23	24	25	26	27	28
Days on Stream	34.7	36.7	39.6	41.4	43.7	56.6	57.8	61.7	64.7
Temperature, °C	150	150	175	175	150	150	125	125	150
Pressure, kPag	1034	2069	1034	1034	1034	2069	4137	4137	2069
Pressure, psig	150	300	150	150	150	300	600	600	300
H ₂ /Benzene Molar	0.64	0.32	0.64	0.64	0.64	0.32	0.64	1.28	1.28
Benzene WHSV	0.52	0.52	1.05	0.52	0.52	1.05	1.05	0.52	0.52
Benzene Conv, %	37.6	28.1	29.5	53.5	41.8	28.6	19.6	37.1	64.4
Hydrogen Conv, %	67.8	96.6	53.9	96.8	64.9	95.3	33.7	32.2	65.0
<u>Selectivity, wt%</u>									
Methylcyclopentane	0.11	0.09	0.52	0.74	0.13	0.07	0.04	0.04	0.16
Cyclohexane	4.5	6.5	3.7	4.2	3.4	5.3	10.3	12.9	7.9
CHB	73.0	79.5	70.8	66.2	72.8	79.4	79.2	71.8	59.8
MCPB	2.1	2.5	4.3	4.9	2.3	2.0	1.1	1.0	2.0
DCHB	17.4	9.6	16.9	19.2	18.3	11.7	8.3	12.7	25.1
MCP-CHB	2.2	1.6	3.1	3.8	2.4	1.3	0.8	1.3	3.3
<u>Others</u>	0.5	0.0	0.6	0.8	0.6	0.2	0.0	0.2	1.6
Sum	100	100	100	100	100	100	100	100	100
CHB + DCHB sel, %	90.4	89.1	87.7	85.4	91.1	91.1	87.5	84.5	84.8
<u>Product Yield, %</u>									
Cyclohexane	2.2	3.2	1.8	2.0	1.6	2.6	5.0	6.3	3.9
CHB	35.6	38.7	34.5	32.3	35.5	38.7	38.6	35.0	29.1
DCHB	8.5	4.7	8.2	9.3	8.9	5.7	4.1	6.2	12.2
CHB+DCHB	44.1	43.4	42.7	41.6	44.4	44.4	42.6	41.2	41.3

2008EM102-PCT

Table 6

Test Condition No. Sample ID	29 71	30 76	31 79	32 83	33 86	34 87	35 91	36 97
Days on Stream	67.7	72.7	75.7	77.9	79.7	80.7	84.7	89.7
Pressure, kPag	1034	1034	4137	4137	4137	1034	2069	2069
Temperature, °C	150	150	150	175	175	150	125	125
Pressure, psig	150	150	600	600	600	150	300	300
H ₂ /Benzene Molar Ratio	1.28	0.64	0.64	1.28	0.64	0.64	0.64	0.32
Benzene WHSV	0.26	0.26	0.52	1.05	1.05	0.52	0.52	0.52
Benzene Conv, %	72.9	53.9	47.8	82.7	49.6	31.0	24.5	20.9
Hydrogen Conv, %	70.2	98.5	97.9	93.8	98.2	51.5	38.6	77.6
Selectivity, wt%								
Methylcyclopentane	0.34	0.2	0.1	0.3	0.2	0.1	0.0	0.0
Cyclohexane	5.6	5.1	13.0	12.6	9.6	4.2	5.8	13.3
CHB	53.0	67.1	67.1	49.0	67.3	73.8	79.0	76.5
MCPB	2.5	2.27	2.17	3.18	3.50	2.19	1.09	0.96
DCHB	32.0	21.7	15.4	27.9	15.8	16.9	12.4	8.1
MCP-CHB	3.4	2.5	1.8	4.2	2.9	1.9	1.2	0.8
Others	3.1	1.0	0.4	2.7	0.5	0.5	0.2	0.1
Sum	100	100	100	100	100	100	100	99.8
CHB + DCHB sel, %	85.0	88.8	82.5	76.9	83.2	90.8	91.4	84.7
Product Yield, %								
Cyclohexane	2.7	2.5	6.4	6.2	4.7	2.1	2.8	6.5
CHB	25.8	32.7	32.7	23.9	32.8	36.0	38.5	37.3
DCHB	15.6	10.6	7.5	13.6	7.7	8.2	6.1	4.0
CHB+DCHB	41.4	43.3	40.2	37.5	40.5	44.2	44.5	41.3

[0049] Using the test data in Tables 2 to 5, the effect of process variables on catalyst performance was evaluated. Process variables such as temperature (abbreviated as temp), pressure (abbreviated as press), H₂/benzene (Bz) molar ratio, and benzene WHSV were all shown to have a significant effect on catalyst performance. Figure 1 shows their effect on benzene conversion, and on selectivities to cyclohexane (CH), CHB and DCHB. Figure 2 shows their effect on the formation of other byproducts such as MCP (methylcyclopentane), MCPB (methylcyclopentyl-benzene), and MCP-CHB (methylcyclopentyl-cyclohexylbenzene). Based on these results, it was possible to show that using an MCM-22 family catalyst and a controlled set of process conditions, cyclohexylbenzene could be produced in high yield and with very low production of undesirable impurities (particularly cyclohexane, MCP, MCPB and MCP-CHB).

[0050] While the present invention has been described and illustrated by reference to particular embodiments, those of ordinary skill in the art will appreciate that the invention lends itself to variations not necessarily illustrated herein. For this reason, then, reference should be made solely to the appended claims for purposes of determining the true scope of the present invention.

PCT CLAIMS

1. A process for producing cyclohexylbenzene, the process comprising contacting benzene and hydrogen under hydroalkylation conditions with a catalyst system comprising a
5 MCM-22 family molecular sieve and at least one hydrogenation metal, wherein the conditions comprise a temperature of from 140°C to 175°C, a pressure of from 931 kPag to 1207 kPag (135 psig to 175 psig), a hydrogen to benzene molar ratio of from 0.30 to 0.65 and a weight hourly space velocity of benzene of from 0.26 to 1.05 hr⁻¹.
2. The process of claim 1, wherein the conditions comprise a temperature of from 150°C
10 to 160°C and/or a pressure of from 1000 kPag to 1069 kPag (145 psig to 155 psig) and/or a hydrogen to benzene molar ratio of from 0.45 to 0.64 and/or a weight hourly space velocity of benzene of from 0.3 to 0.6 hr⁻¹.
3. The process of claim 1 or 2, wherein the MCM-22 family molecular sieve has an X-ray diffraction pattern including d-spacing maxima at 12.4±0.25, 6.9±0.15, 3.57±0.07 and
15 3.42±0.07 Angstrom.
4. The process of any preceding claim, wherein the MCM-22 family molecular sieve is selected from MCM-22, PSH-3, SSZ-25, ERB-1, ITQ-1, ITQ-2, MCM-36, MCM-49, MCM-56, UZM-8 and mixtures of any two or more thereof.
5. The process of claim 4, wherein the MCM-22 family molecular sieve is selected from
20 MCM-22, MCM-49, MCM-56 and combinations of any two or more thereof.
6. The process of any preceding claim, wherein said at least one hydrogenation metal is selected from palladium, ruthenium, nickel, zinc, tin, and cobalt.
7. The process of claim 6 wherein the hydrogenation metal comprises palladium.
8. The process of any preceding claim, wherein said at least one hydrogenation metal is
25 present in an amount of from 0.05 to 10 % by weight of the catalyst system.
9. The process of claim 8 wherein the hydrogenation metal is present in an amount of from 0.1 to 5% by weight of the catalyst system.
10. The process of any preceding claim, wherein at least 50 wt% of the hydrogenation metal is supported on an inorganic oxide that is different from the molecular sieve.
- 30 11. The process of claim 10, wherein at least 75wt% of the hydrogenation metal is supported on said inorganic oxide.
12. The process of claim 11, wherein substantially all of the hydrogenation metal is supported on said inorganic oxide.

13. The process of claim 10, 11 or 12, wherein said inorganic oxide is composited with the molecular sieve, and the hydrogenation metal is applied to the inorganic oxide before the inorganic oxide is composited the molecular sieve.
14. The process of any one of claims 10 to 13, wherein the inorganic oxide comprises an
5 oxide of at least one element of Groups 2, 4, 13 and 14 of the Periodic Table of Elements.
15. The process of claim 14, wherein the inorganic oxide comprises alumina and/or titania and/or zirconia.
16. The process of any preceding claim, which results in an effluent comprising the cyclohexylbenzene product that also contains dicyclohexylbenzene and at least part of the
10 dicyclohexylbenzene is contacted with benzene under transalkylation conditions to produce further cyclohexylbenzene.
17. The process of any preceding claim wherein the hydroalkylation conditions are selected to produce a total hydroalkylation effluent containing no more than 3wt% of cyclohexane and/or no more than 5 wt% of methylcyclopentane, methylcyclopentylbenzene and
15 methylcyclopentyl-cyclohexylbenzene in combination.
18. A method for coproducing phenol and cyclohexanone, the method comprising producing cyclohexylbenzene by the process of any preceding claim, oxidizing the cyclohexylbenzene to produce cyclohexylbenzene hydroperoxide and cleaving the cyclohexylbenzene hydroperoxide to produce phenol and cyclohexanone.
- 20 19. The method of claim 18 which further comprises dehydrogenating the cyclohexanone to produce further phenol.