(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
16 January 2003 (16.01.2003)

PCT

(10) International Publication Number
WO 03/004830 A1

(51) International Patent Classification[7]: E21B 33/038

(21) International Application Number: PCT/US02/22285

(22) International Filing Date: 1 July 2002 (01.07.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/302,869 3 July 2001 (03.07.2001) US

(71) Applicant: FMC TECHNOLOGIES, INC. [US/US]; 200 E. Randolph Drive, Chicago, IL 60601 (US).

(72) Inventor: KOLEILAT, Bashir, M.; 1111 Bering Drive, #1106, Houston,TX 77057 (US).

(74) Agent: QUERY, Henry, C., Jr.; 504 S. Pierce Avenue, Wheaton, IL 60187 (US).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations*

[Continued on next page]

(54) Title: HIGH PRESSURE SIDE-BY-SIDE WELLHEAD SYSTEM

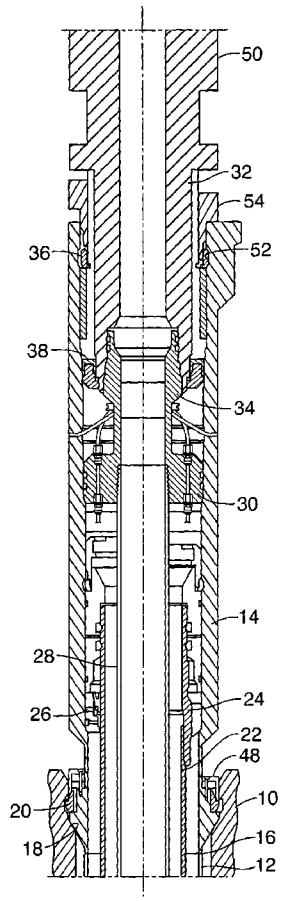

(57) Abstract: The present invention is a wellhead system for use in completing at least two bores from within a single conductor housing. The wellhead system comprises at least one wellhead housing which is supported on the conductor housing and which comprises a top portion that is adapted to be connected to a lower portion of a wellhead component, a casing hanger which is supported within the wellhead housing and from which a casing string is suspended, and a connector for securing the wellhead component to the wellhead housing. In accordance with the present invention, the connector is selected from the group consisting of a latch ring and a segmented clamp assembly.

WO 03/004830 A1

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.