

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 September 2008 (18.09.2008)

PCT

(10) International Publication Number
WO 2008/110766 A1

(51) International Patent Classification:
G01F 1/32 (2006.01) **G01F 1/72** (2006.01)

(21) International Application Number:
PCT/GB2008/000797

(22) International Filing Date: 7 March 2008 (07.03.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0704755.8 13 March 2007 (13.03.2007) GB

(71) Applicant (for all designated States except US): **CRANFIELD UNIVERSITY** [GB/GB]; Cranfield, Bedfordshire MK43 0AL (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SANDERSON, Michael, Langley** [GB/GB]; 85 Lincslade Grove, Loughton, Milton Keynes MK5 8AD (GB).

(74) Agent: **TRANTER, Andrew, D.**; Barker Brettell LLP, 138 Hagley Road, Edgbaston, Birmingham B16 9PW (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) Title: BI-DIRECTIONAL OSCILLATING JET FLOWMETER

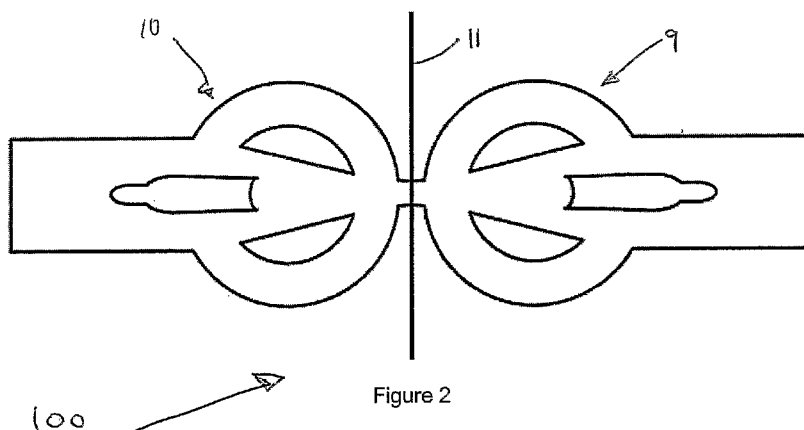


Figure 2

(57) Abstract: A bi-directional flowmeter comprises a first fluidic oscillator device arranged to measure the flow of fluid in a first direction and a second fluidic oscillator device arranged to measure the flow of fluid in a second direction opposite to the first direction and in which the two oscillators devices are connected together in series between an inlet port and an outlet port of the flowmeter between which the fluid to be measured can flow.

WO 2008/110766 A1