



(51) International Patent Classification:  
*B41J 2/175* (2006.01) *B41J 2/19* (2006.01)

(21) International Application Number:  
PCT/AU2008/000332

(22) International Filing Date:  
12 March 2008 (12.03.2008)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **SILVERBROOK RESEARCH PTY LTD** [AU/AU]; 393 Darling Street, Balmain, New South Wales 2041 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MORGAN, John Douglas** [AU/AU]; 393 Darling Street, Balmain, New South Wales 2041 (AU). **WANG, Miao** [CN/AU]; 393 Darling Street, Balmain, New South Wales 2041 (AU). **MCAULIFFE, Patrick John** [AU/AU]; 393 Darling Street, Balmain, New South Wales 2041 (AU). **SILVERBROOK, Kia** [AU/AU]; 393 Darling Street, Balmain, New South Wales 2041 (AU).

(74) Agent: **SILVERBROOK RESEARCH PTY LTD**; 393 Darling Street, Balmain, New South Wales 2041 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PRINTER WITH GAS BUBBLE OCCLUSION RESISTANT CONDUITS

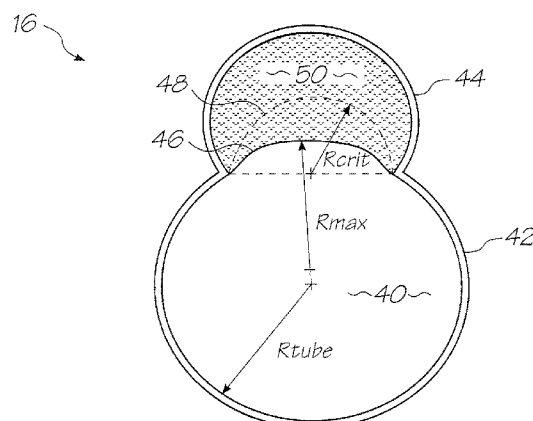


FIG. 3A

(57) Abstract: An inkjet printer with a printhead and a conduit connected to the printhead. The conduit defines a flow path for the printing fluid and has an internal cross section configured such that the surface tension of printing fluid within it favors gas bubble growth along the conduit length over radial bubble growth that would fully occlude the flow path.