



(51) International Patent Classification:

E05B 15/02 (2006.01) *E05B 17/22* (2006.01)
E05B 17/20 (2006.01) *E05B 47/00* (2006.01)

(21) International Application Number:

PCT/AU2010/001305

(22) International Filing Date:

6 October 2010 (06.10.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2009904862 6 October 2009 (06.10.2009) AU

(71) Applicant (for all designated States except US): **ASSA ABLOY AUSTRALIA PTY LTD** [AU/AU]; 235 Huntingdale Road, Oakleigh, Victoria 3166 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ARMARI, Ernest** [AU/AU]; 15 Alick Street, Cabramatta, New South Wales 2166 (AU). **AYLESBURY, Mark** [AU/AU]; 22 Silverwater Crescent, Miranda, New South Wales 2228 (AU).

(74) Agent: **PHILLIPS ORMONDE FITZPATRICK**; Level 21, 22 & 23, 367 Collins Street, Melbourne, Victoria 3000 (AU).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: IMPROVED ELECTRIC STRIKE AND COMBINATION WITH IMPROVED LOCK ASSEMBLY

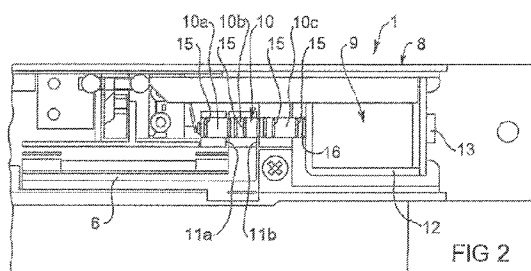

(57) Abstract: This invention relates to an improved electric strike assembly (1) including a keeper (6) which is mounted to a housing (8). A locking means including an electrical actuator (9) and a detent (10) configured to resist adjustment of the detent (10) from an active lock condition. The detent (10) is preferably grooved so as to catch on the keeper (6) or housing (8) preventing it moving from an active condition.