



(43) International Publication Date
9 September 2011 (09.09.2011)

- (51) International Patent Classification:
A62C 31/00 (2006.01) *A62C 99/00* (2010.01)
A62C 37/11 (2006.01)
- (21) International Application Number:
PCT/DK2011/050068
- (22) International Filing Date:
4 March 2011 (04.03.2011)
- (25) Filing Language: Danish
- (26) Publication Language: English
- (30) Priority Data:
PA 2010 70086 4 March 2010 (04.03.2010) DK
- (71) Applicant (for all designated States except US): **VID FIRE-KILL APS** [DK/DK]; Svalbardvej 13, DK-5700 Svendborg (DK).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **PALLE, Carsten** [DK/DK]; Høje Bøgevej 12-2, DK-5700 Svendborg (DK).
- (74) Agents: **SCHWARZE, Holm** et al.; Guardian IP Consulting I/S, Diplomvej, Building 381, DK-2800 Kgs. Lyngby (DK).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (88) Date of publication of the international search report:
25 July 2013

(54) Title: A MODULAR AUTOMATIC SPRAY NOZZLE

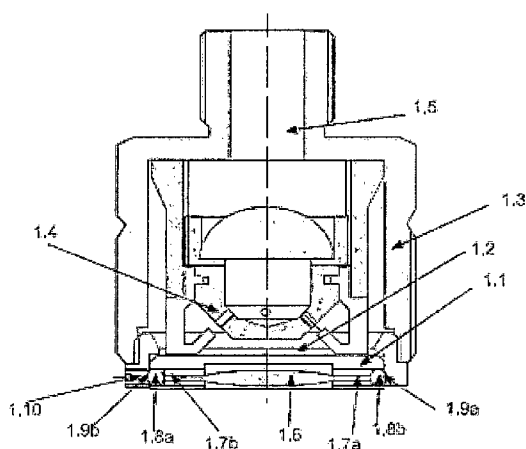


Fig. 1

(57) Abstract: An automatic spray nozzle arrangement, which comprises a nozzle casing having a cavity, with inlet and outlet openings, in which a nozzle arrangement is kept inside by means of a plate, which is characterized by the plate being located in the outlet opening of the nozzle casing by help of an automatic thermal release element, which demolishes from heat exposure, and where the release element via one or two brackets, which are fixated in one or two points attached to casing fixate, fixate the plate in the nozzle casing.

