

AN ELECTRICAL SOCKET

5 The present invention relates to an electrical socket having at least two socket contacts for connections with two or more pin contacts of a plug and a shutter for closing plug pin openings in the front wall of the socket
10 to cover two of the contacts in the absence of the plug.


It is common to provide such a socket wherein the shutter closes the live and neutral openings in the socket, the shutter being movable to the open position by means of a
15 part having a ramped surface which extends to the earth opening. The earth pin on insertion acts on the ramped surface to urge the shutter away from the openings. A spring then closes the shutter when the plug is removed. These shutters are simple to open by merely inserting a
20 probe into the earth hole.

It is an object of the invention to make such a socket safer. Accordingly an electrical socket according to the invention has at least two socket contacts for connection
25 with two or more pin contacts of a plug and a shutter for closing plug pin openings in a front wall of the socket to cover two of the contacts in the absence of the plug, wherein the shutter is latched in the closed position by means of at least a first latch operable by means of a plug
30 earth pin or protrusion from a plug other than the live and neutral pins of said plug, wherein the first latch is formed as at least one latching member extending from the shutter which is pushed to one side by the earth pin or protrusion in the lateral direction of a line joining the
35 centres of the openings for the live and neutral pins so as

2

to release the member from a stop wherein the shutter is
formed with at least one lateral ramped portion to close
the live and neutral openings in the front wall and wherein
the latching member or members extend from the lateral
portion or portions, the shutter being urged into position
by a spring means and wherein the lateral portion or
portions are formed on arms latched by a second latch in
the closed position the second latch being operable by
means of said plug's live and neutral pins .

10

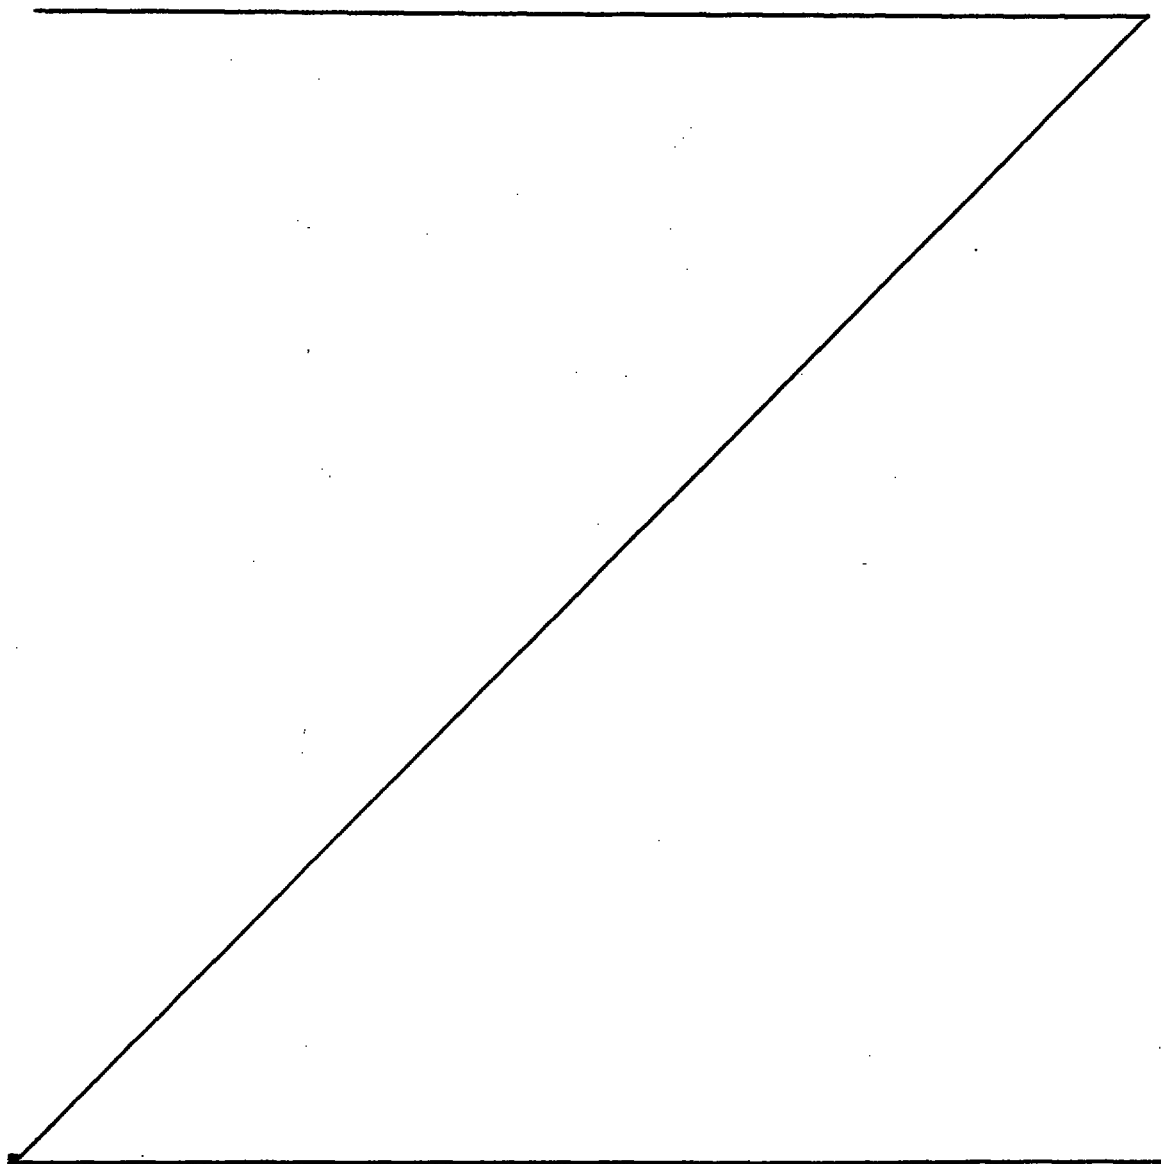

An embodiment of the invention will now be described with reference to the accompanying drawings in which:-


5 Figure 1 is a plan view of part of a socket according to the invention showing openings in the front wall of the socket according to a first embodiment of the invention,

10 Figure 2 is a cross sectional view of the socket of Fig. 1 taken on BB as seen from A in Fig. 1,

 Figure 3 is a cross sectional view of the socket of Figure 1 taken on CC in Figure 1,

15 Figure 3A shows a second embodiment with a similar view to the shutter of Fig. 3,

20 Figures 4 to 6 are plan views of the movement of the shutter seen in Figure 1 from a first position in Figure 4 in which no plug or pins are inserted, a second position Figure 5 in which the earth pin of a three pin plug is inserted and a third position in Figure 6 in which all plug

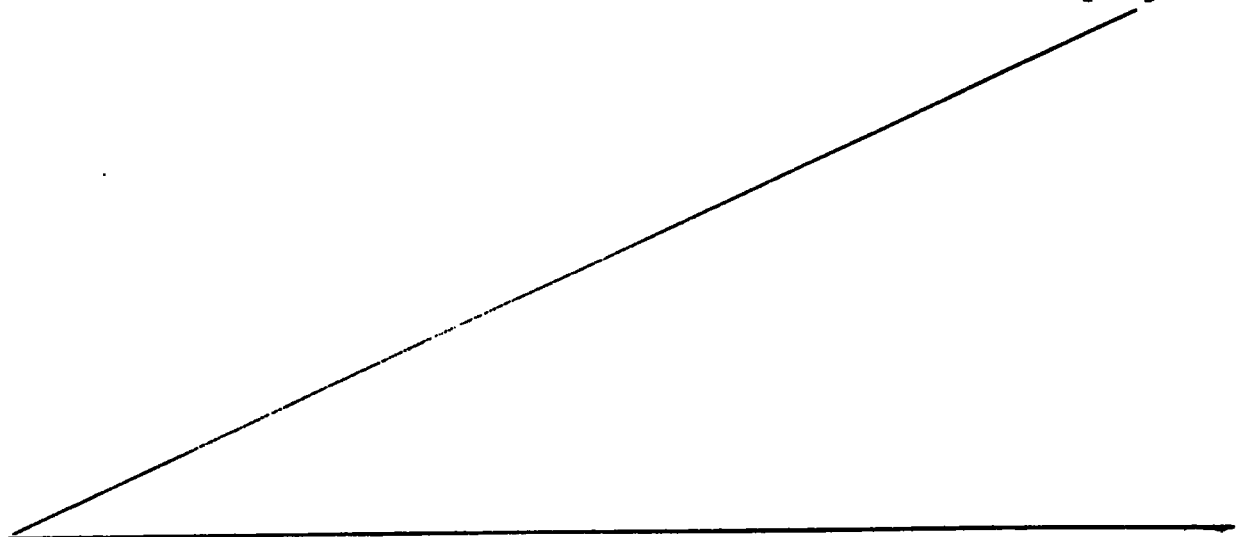

pins are inserted,

Figure 7 is a perspective view of a shutter of a third embodiment of the invention,

5

Figure 8 is a plan view of the shutter of Fig. 7 in a similar view to Fig. 1, and

10

Figure 9 to 11 are plan views of the shutter seen in Fig. 8 and correspond respectively to the movements of the shutter shown in Fig.s 4 to 6.

15

In Figures 1 to 3 a socket 1 is shown with a front wall 2 and in Figure 3 a British Standard three pin plug 3 is shown half in socket 1. It should be noted in this respect that although the arrangement is specifically designed for a British standard three pin plug having an earth pin 4, a line 5 and a neutral pin 6, the earth pin can be replaced by a suitable protrusion from a plug where only live and neutral pins are provided. Whilst rectangular pins are shown these may equally be round pins or have any other suitable shape.

20

25

The front wall 2 has plug pin openings 14, 15 and 16 for pins 4, 5 and 6 respectively. Socket contacts for the pins are not shown.

30

35

Below the front wall 2 within the socket is a shutter 20 which is latched in the closed position shown in Fig. 1 and Fig. 4 by means of a first latch comprising a pair of opposed latching members formed as hooks 21 and a fixed stop 22. The hooks 21 which face each other are each formed as an end portion of a resilient flat web 23 extending from lateral ramped portions 25 which when the shutter is closed lie immediately below and close off

openings 15 and 16. Lateral portions or latching faces 25 are formed on laterally extending arms 27 which are normally inclined slightly upwards to latching edges 29. Latching edges 29 latch into latching grooves 31 formed in the inner surface of the front wall 2 adjacent to openings 15 and 16 to form a second latch.

The hooks 21 are provided with upper chamfered edges 19 and vertical chamfered edges 18.

Extending from a lower laterally extending web 32 which connects arms 27 is a projection 33 onto which a coiled compression spring 34 acts. Spring 34 acts to urge the shutter into the closed position shown in Fig. 1. Each arm 27 has a depressed circular area 50 if required, which if a two pin standard plug were inserted into openings 15 and 16 would catch the pins and prevent movement of the shutter away from openings 15 and 16 even if an object is inserted into opening 14 in order to release the first latch.

When plug 3 is inserted into the socket 1 the earth pin 4 first acts on hook chamfers 19 to force the hooks 21 apart. These clear stop 22 as shown in Fig. 5. The shorter live and neutral pins 5 and 6 then act on ramped portions 25 of the shutter arms 27 to force the arms and arm edges 29 downwards to a broken line position shown in Fig. 2 at 40. The edges 29 are then unlatched and clear of grooves 31. Further insertion of pins 5 and 6 cause the shutter 20 to move away from opening 14 opening holes 15 and 16 to allow the pins to fully enter openings 14, 15 and 16 as shown in Fig. 6 when the plug is fully inserted the shutter assumes its original shape as shown in unbroken lines in Fig. 2. This is enabled by a sloping inner surface 36 of front wall 2 shown in Fig. 3.

When the plug is removed the shutter 20 is driven back by spring 34. The arms or wings 27 and hooks 21 relatch to lock the shutter in its closed position.

5 The stop 22 has recesses 35 to receive the hooks 21 in a position as shown in Fig. 6 where the opening 15 and 16 in the front wall 2 of the socket are unshuttered. These recesses 35 then allow the latching members, that is the hooks, to return in the lateral direction as between
10 openings 15 and 16 to the situation shown in Fig. 4 before the hooks are released from the stop 22.

Central web 32 from which arms 27 extend and whereby the arms are mounted to the shutter is resilient so that the
15 arms are resiliently urged upwards towards the outer surface of the front wall 2 into grooves 31.

Fig 3A shows a second embodiment which is a slightly modified arrangement of the shutter of Fig. 3 in which the
20 spring 34' engages in a recess 35 formed between webs 23' of the hooks 21' and central web 32'. This enables the shutter arrangement to be more compact.

It should be noted that it is possible to provide only one
25 hook 21 or 21' though this may not be so effective as a pair of hooks.

Figures 7 to 8 show a third embodiment in which a shutter 120 operates to open openings 115 and 116 in a direction X
30 opposite to that in the first embodiment shown in Figs 1 to 6. There are certain advantages in this arrangement as will be discussed.

The shutter 120 is formed with arms 127 similar to arms 27
35 of the first embodiment except that their lateral ramped

portions 125 face away from the earth pin. The latching members 121 which act similarly to members 21 of the first embodiment are moved laterally outward by the earth pin 104 on initial insertion of the plug. This enables the members to clear stop 122 (see Fig. 10). Further depression of the plug results in live and neutral pins 105 and 106 acting on ramped portions 125. The arms 127 are then depressed to release the arms against the resilience of central web 132 from grooves (not shown) equivalent to grooves 31 of the first embodiment. The interaction of pins 105 and 106 and portions 125 then causes the shutter to move towards the earth pin in direction X against spring 134 which is located between the members 121 and between fixed stop 151 formed as part of the plug moulding and end wall 152 of the shutter. The shutter with members 121 unlatched from stop 122 moves to the position shown in Fig. 11 where the members return by means of their resilience to their central position with the chamfered end portions 119 lying in recesses 135 in stop 122.

The third embodiment also has depressed circular areas 150 similar in purpose and form to those of the first embodiment shown at 50. The third embodiment has an advantage over that of the first embodiment in that because the spring 134 is located between the three pin openings 114-116 the arrangement is more compact.

The three embodiments have an advantage over prior known construction in that any wear of the earth pin on the shutter does not affect the unshuttering. Furthermore because unlatching on the flank of the earth pin and this does not have to move the shutter against the shutter spring, there is only a small amount of friction at the point of initial plug insertion. In order to move the shutter it is necessary to insert all three pins

simultaneously. If say the earth pin or similar protrusion is not present the shutter remains latched by members 21 or 121. If either the live or neutral pin is missing then arms 27 or 127 remain latched. If a two pin plug of say the Continental European Standard is inserted and the latching members 21 or 121 are somehow forced to unlatch then the depressed areas 50 or 150 inhibit longitudinal shutter movement. The construction of the shutter and its latching members as a single item keeps the cost to a minimum. All that is required for the shutter arrangements is a spring and the shutter including latching means. Any remaining parts such as the stop 22 or 122 are moulded as part of the socket assembly. For this reason also, assembly of the socket during manufacture is simple and cost effective. Furthermore, the manufacturing tolerances in the constructions shown are not too critical as is the case in many early shuttering arrangements.



9

C L A I M S

5 1. An electrical socket having at least two socket
contacts for connection with two or more pin contacts of a
plug and a shutter for closing plug pin openings in a front
wall of the socket to cover two of the contacts in the
absence of the plug wherein the shutter is latched in the
10 closed position by means of at least a first latch operable
by means of a plug earth pin or protrusion from a plug
other than the live and neutral pins of said plug, wherein
the first latch is formed as at least one latching member
extending from the shutter which is pushed to one side by
15 the earth pin or protrusion in the lateral direction of a
line joining the centres of the openings for the live and
neutral pins so as to release the member from a stop,
wherein the shutter is formed with at least one lateral
ramped portion to close the live and neutral openings in
20 the front wall and wherein the latching member or members
extend from the lateral portion or portions, the shutter
being urged into position by a spring means and wherein the
lateral portion or portions are formed on arms latched by
a second latch in the closed position the second latch
25 being operable by means of said plug's live and neutral
pins .

2. A socket as claimed in claim 1 wherein initial
insertion of the earth pin so as to release the latching
30 member or members from the stop results in no movement of
the shutter in a direction parallel to the centre line of
the plug perpendicular to the line between the centre of
the openings in the front wall of the socket for the live
and neutral pin contacts.



10

3. A socket as claimed in claim 1 or 2 wherein the second latch comprises edges on the arms and grooves in the socket into which the edges engage in the closed position.

5

4. A socket as claimed in any one of claims 1 to 3 wherein the arms extend laterally from a resilient central web portion.

10

5. A socket as claimed in any one of claims 1 to 4 wherein the arms are mounted to the shutter so as to be resiliently urged upwards towards the outer surface of the front wall.

15

6. A socket as claimed in any one of claims 1 to 5 wherein the stop has a recess or recesses to receive the latching member or members in a position where the openings in the front wall of the socket are unshuttered and so as to enable the latching member or members to return in the lateral direction substantially to a situation assumed before the release from the stop.

20

25

7. A socket as claimed in claim 3 wherein the arms with their edges are forced downwards by insertion of the live and neutral pins to disengage from the grooves whereby the shutter is enabled to move rearwardly away from an opening in said front wall of the socket for the earth pin or protrusion and wherein the stop is between the opening for the earth pin or protrusion and the openings for the live and neutral pins.

30

35

8. A socket as claimed in claim 3 wherein the arms with their edges are forced downwards by insertion of the live and neutral pins to disengage from the grooves whereby the shutter is enabled to move forwardly toward an opening in said front wall of the socket



11

socket for the earth pin or protrusion and wherein the stop is located at a position adjacent the side of the opening for the earth pin or protrusion opposite that side nearest the openings for the live and neutral pins.

5

9. A socket as claimed in any one of claims 1 to 7 wherein the spring means is a coiled compression spring located between two said latching members and a part of the socket adjacent the opening for the earth pin or protrusion.

10

10. An electrical socket substantially as described with reference to Figures 1 to 6 of the accompanying drawings.

15

11. An electrical socket substantially as described with reference to Figures 7 to 11 of the accompanying drawings.

12. An electrical socket substantially as described with reference to Figure 3A of the accompanying drawings.

20