



(51) International Patent Classification:
B65H 5/14 (2006.01) *B21C 47/28* (2006.01)

(21) International Application Number:
PCT/EP2009/064821

(22) International Filing Date:
10 November 2009 (10.11.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
08170066.8 27 November 2008 (27.11.2008) EP

(71) Applicant (for all designated States except US): NV
BEKAERT SA [BE/BE]; Bekaertstraat 2, B-8550 Zwevegem (BE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): PAUWELS, Luc
[BE/BE]; Krakeelhoek 12, B-9950 Waarschoot (BE).

(74) Agent: SEYNHAEVE, Geert; Bekaertstraat 2, B-8550
Zwevegem (BE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT,
TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: IMPROVED SAWING WIRE SPOOL

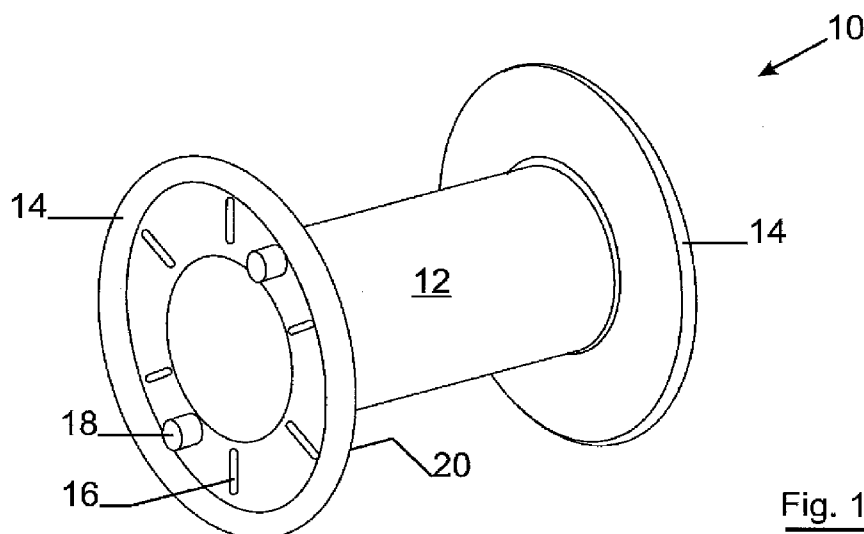


Fig. 1

(57) Abstract: The invention relates to a spool for winding fine metal wire on, comprising a core and two flanges coupled to either end of said core, wherein the outer side of each of said flanges comprises multiple debossed areas that extend radial from said core and are evenly distributed around said core. The debossed areas reduce the spreading of the flanges when winding fine metal wire on.