



(51) International Patent Classification:
H04R 1/08 (2006.01) **H04R 25/00** (2006.01)

(21) International Application Number:
PCT/EP2011/067358

(22) International Filing Date:
5 October 2011 (05.10.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PA201000927 11 October 2010 (11.10.2010) DK

(71) Applicant (for all designated States except US): **WIDEX A/S** [DK/DK]; Nymoellevej 6, DK-3540 Lyngby (DK).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LI, Chunjian** [CN/DK]; Widex A/S, Nymoellevej 6, DK-3540 Lyngby (DK). **JENSEN, Mads Jakob Herring** [DK/DK]; Widex A/S, Nymoellevej 6, DK-3540 Lyngby (DK). **MOERKEBJERG, Martin** [DK/DK]; Widex A/S, Nymoellevej 6, DK-3540 Lyngby (DK). **CHRISTENSEN, Soeren** [DK/DK]; Widex A/S, Nymoellevej 6, DK-3540 Lyngby (DK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HEARING AID ADAPTED FOR SUPPRESSION OF WIND NOISE

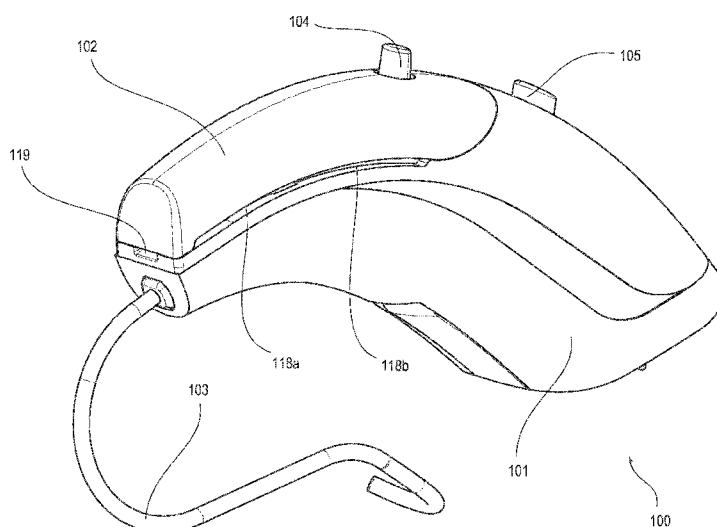


FIG. 1

(57) Abstract: A hearing aid (100) having a microphone, a signal processing unit, an electrical-acoustical output transducer, a housing (101) and a wind shield cover (102) wherein the housing has a surface with a microphone inlet (112, 113), and the wind shield cover is adapted to be attached to the housing, to cover the microphone inlet, to provide for sound to be guided in a gap between the wind shield cover and the housing, hereby providing for the transmission of sound from the surroundings and to said microphone inlet, wherein a first dimension of a cross-section of the gap is in the range between 0.15 mm and 0.5 mm, and wherein the minimum distance, along the gap, from the microphone inlet and to the opening of the gap, towards the surroundings, is at least 1 mm.