




904806-0 IPDS' copy



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁶ : D03D 15/00, 19/00, H05K 1/03		A1	(11) International Publication Number: WO 97/29230
			(43) International Publication Date: 14 August 1997 (14.08.97)
(21) International Application Number: PCT/EP96/05660			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 17 December 1996 (17.12.96)			
(30) Priority Data: MI96A000237 8 February 1996 (08.02.96) IT			
(71) Applicant (for all designated States except US): GIVIDI ITALIA S.P.A. [IT/IT]; Via Besana, 5, I-20122 Milano (IT).			
(72) Inventors; and (75) Inventors/Applicants (for US only): SCARI', Diego [IT/IT]; Villaggio Brugherio, 65, I-20047 Brugherio (IT). SCARI', Marco [IT/IT]; Villaggio Brugherio, 65, I-20047 Brugherio (IT).			
(74) Agent: SPADARO, Marco; Studio Consulenza Brevettuale, Via Rossini, 8, I-20122 Milano (IT).			

Published

*With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: UNIDIRECTIONAL GLASS FABRIC PRODUCED WITH CONTINUOUS YARN WHICH IS TWISTED, HAS A LOW NUMBER OF TWISTS OR ZERO TWISTING TURNS AND INTERLACED WITH THIN GLASS YARNS AS A STABILIZING BINDING, AND USE THEREOF IN THE MANUFACTURE OF PRINTED CIRCUITS

This Sheet Has Been Replaced

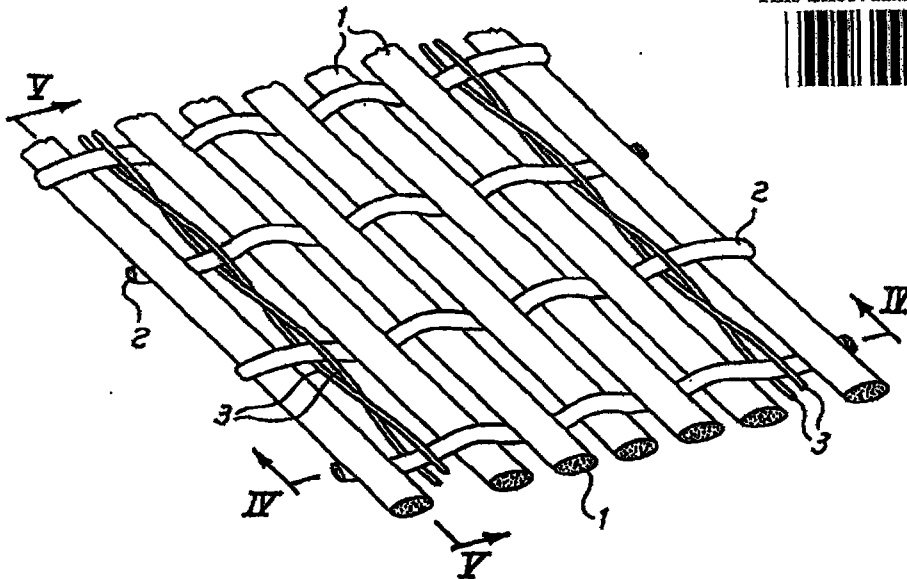

(57) Abstract

The present invention relates to a unidirectional glass fabric produced with continuous yarn (2, 3) which is twisted, plied or has zero twisting turns, with different gram weights and interlaced with thin glass yarns (3) as a stabilizing binding, use thereof in the manufacture of printed circuits and in numerous other industrial applications, and a method for the manufacture thereof.