



(43) International Publication Date
8 May 2014 (08.05.2014)

- (51) International Patent Classification:
B65G 5/00 (2006.01) *F28D 20/00* (2006.01)
- (21) International Application Number:
PCT/SE2013/051279
- (22) International Filing Date:
1 November 2013 (01.11.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1251238-0 1 November 2012 (01.11.2012) SE
- (71) Applicant: **SKANSKA SVERIGE AB** [SE/SE];
Drottningtorget 14, S-205 33 Malmö (SE).
- (72) Inventor: **PILEBRO, Hans**; Oxelgränd 6, S-182 45 En-
ebyberg (SE).
- (74) Agent: **AWAPATENT AB**; Box 5117, S-200 71 Malmö
(SE).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: ENERGY STORAGE

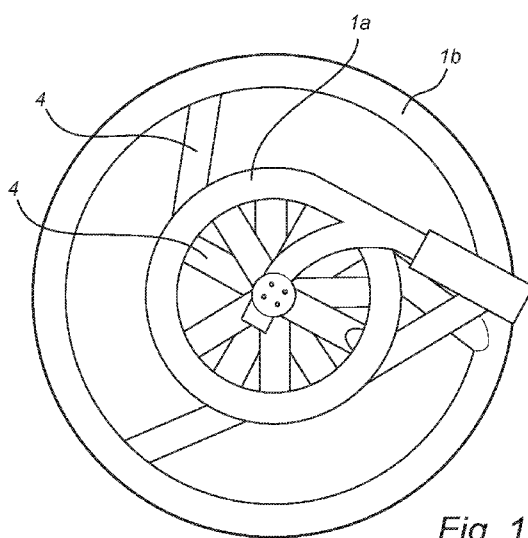


Fig. 1

(57) Abstract: The present invention relates to an arrangement for storing thermal energy, comprising at least two tunnels (1a, 1b) for holding a fluid. The tunnels (1a, 1b) are connected to each other by at least one channel (2), such that fluid communication is allowed between the tunnels (1a, 1b). Each tunnel (1a, 1b) extends at least partially along a respective circular arc.



WO 2014/070094 A1