




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E03C 1/28, E03F 5/04		A1	(11) International Publication Number: WO 99/54560
			(43) International Publication Date: 28 October 1999 (28.10.99)
(21) International Application Number: PCT/SG99/00032		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 16 April 1999 (16.04.99)			
(30) Priority Data: ① 9800770-1 ✓ 21 April 1998 (21.04.98) ✓ SG ✓ ② 9803180-0 ✓ 21 August 1998 (21.08.98) ✓ SG ✓			
(71)(72) Applicant and Inventor: LEE, Kok, Wing [SG/SG]; 557 Upper Thomson Road, #04-11, Singapore 574418 (SG).			
(74) Agent: MCCALLUM, Graeme, David; Lloyd Wise, Tanjong Pagar, P.O. Box 636, Singapore 910816 (SG).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
		2 P.D.s. 1 appl ⁿ . = inv. IPC Symbol = E03C 1/28 E03F 5/04	

(54) Title: A DRAINAGE DEVICE

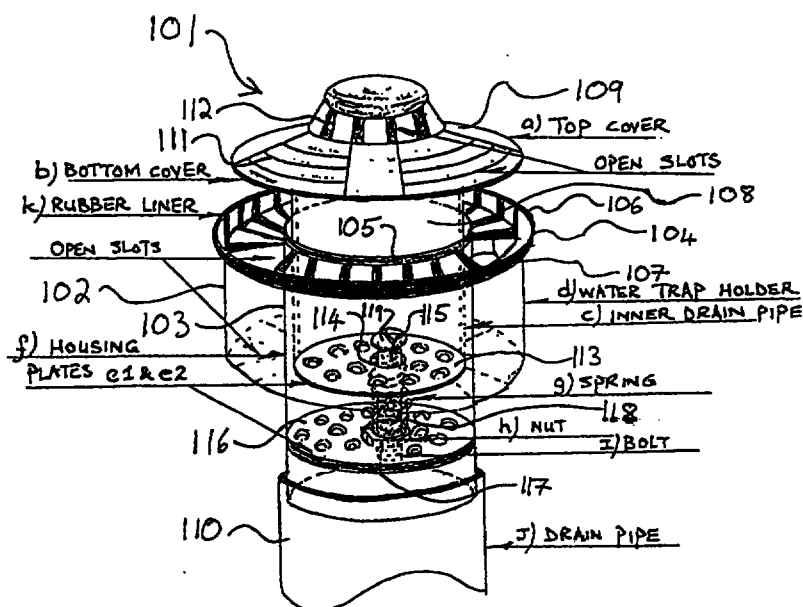

(57) Abstract

A drainage device (1) for a waste water outlet (12) includes an outer tubular member (102) adapted to fit within the waste water outlet (12). An inner tubular member (103) is located within the outer tubular member (102). The interior of the inner tubular member (103) provides a first outlet and a second outlet is defined by the external wall of the inner tubular member (103) and the internal wall of the outer tubular member (102). A valve member (108, 109) is movably mounted with respect to the inner and outer tubular members (102, 103) for movement between a first position in which the second outlet is obturated and the first outlet is open to permit a liquid to flow therethrough, and a second position in which the second outlet is open to permit liquid to enter the second outlet.