

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
5 August 2004 (05.08.2004)


PCT

(10) International Publication Number
WO 2004/065111 A1

- (51) International Patent Classification⁷: **B29D 31/00**, B29C 35/02, B29D 9/00 // B29K 105:24, 105:06
- (21) International Application Number: PCT/SE2004/000007
- (22) International Filing Date: 9 January 2004 (09.01.2004)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:
0300158-3 22 January 2003 (22.01.2003) SE
- (71) Applicant (for all designated States except US): **TOUR & ANDERSSON AB** [SE/SE]; S-524 80 Ljung (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **ENGELBREK-TSSON, Anders** [SE/SE]; Vinkelgatan 10, S-524 32 Herrljunga (SE).
- (74) Agent: **SIEBMANN, H.**; Gotapatent AB, Box 154, S-561 22 Huskvarna (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: A MEMBRANE, A METHOD AND DIE MEANS FOR MANUFACTURING SAME

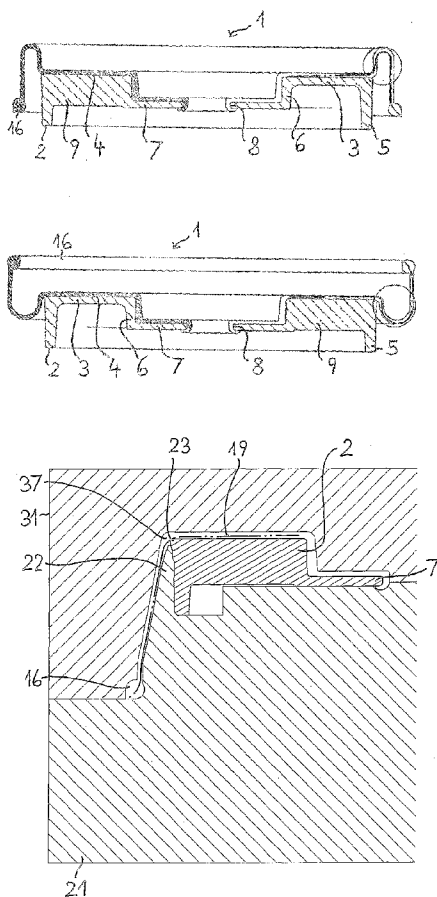

(57) Abstract: The invention relates to a method of manufacturing a membrane (1) from a blank (39) by a cure, which membrane comprises two rubber layers (40, 41) and a fabric-formed reinforcement layer (19), positioned between said rubber layers. In order to counteract and prevent respectively undesirable displacements of said reinforcement layer (19) membrane sections, which are movable in an application position, are manufactured according to the invention having a form, which deviates from the application form, and/or are exposed to stretching during the cure in order to within said membrane section bring about a displacement of said reinforcement layer (19) across a portion of at least one of said rubber layers (40, 41) and consequently a position, which deviates from the blank building up during the cure. The invention also relates to a membrane, manufactured according to this method as well as a mold tool designed to carry out said method and said manufacture of said membrane respectively.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*