

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 July 2006 (13.07.2006)

PCT

(10) International Publication Number
WO 2006/073310 A1

(51) International Patent Classification:
F16J 15/48 (2006.01)

(21) International Application Number:
PCT/NO2006/000001

(22) International Filing Date: 4 January 2006 (04.01.2006)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:
20050057 5 January 2005 (05.01.2005) NO

(71) Applicant (for all designated States except US): **KARM AS** [NO/NO]; N-4250 Kopervik (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HYSTAD, Magne** [NO/NO]; Jonas Lies vei 3, N-4250 Kopervik (NO).

(74) Agent: **LANGFELDT, Jens, F., C.**; Zacco Norway AS, P.O. Box 2003, Vika, N-0125 Oslo (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A METHOD AND A DEVICE FOR SUPPLY OF AT LEAST ONE SUBSTANCE INTO INTERSPACE BETWEEN MUTUALLY MOVABLE, COAXIAL STRUCTURAL ELEMENTS

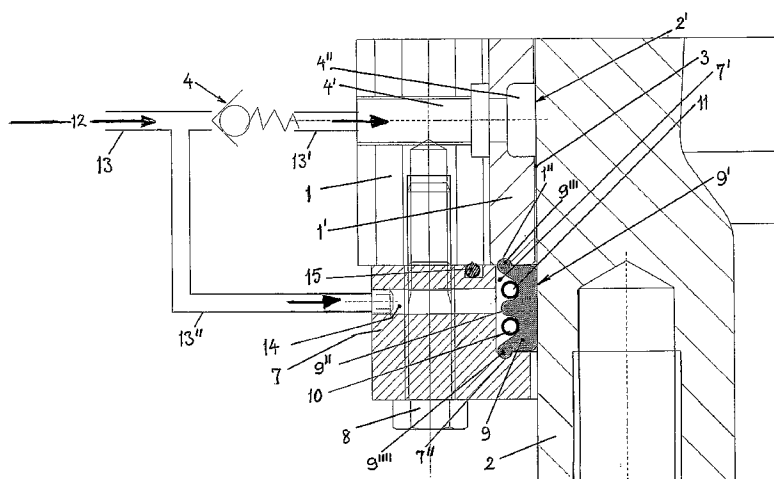

(57) Abstract: A method and a device for the supply of at least one substance (12; 27) into the interspace (3; 22) between mutually moving, coaxial structural elements (1, 1' and 2; 20; 20' and 21), wherein the substance (12; 27) is introduced under pressure into the interspace (3), and wherein excess volume of substance (12; 27) that is introduced is caused to exit the interspace (3; 22). The interspace (3; 22) is closed off at at least one axial end thereof by means of at least one annular, spring-loaded seal (9; 16; 23; 24; 37; 38) which is secured in a retaining part (7; 31; 32) associated with one of the structural elements (1, 1'; 20, 20') and has a contact face against the other structural element (2; 21), wherein the substance (12; 27), at a corresponding pressure and simultaneously with the supply into the interspace (3; 22), is also separately supplied to a pressure-applying face of the seal (9; 16; 23; 24; 37; 38).

WO 2006/073310 A1