

25/06/02
200204342

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
18 July 2002 (18.07.2002)

PCT

(10) International Publication Number
WO 02/055137 A3

- (51) International Patent Classification⁷: A61M 5/36, G01N 29/00 (74) Agents: KOWALIK, Francis, C. et al.; Baxter International Inc., One Baxter Parkway, Deerfield, IL 60015 (US).
- (21) International Application Number: PCT/US01/45622 (81) Designated States (*national*): AU, BR, CA, CN, CO, CR, JP, KR, MX, NZ, PL, SG, ZA.
- (22) International Filing Date: 25 October 2001 (25.10.2001)
- (25) Filing Language: English (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NI., PT, SE, TR).
- (26) Publication Language: English
- (30) Priority Data: 09/706,371 3 November 2000 (03.11.2000) US Published: — with international search report
- (71) Applicant: BAXTER INTERNATIONAL INC. [US/US]; One Baxter Parkway, Deerfield, IL 60015 (US). (88) Date of publication of the international search report: 16 January 2003
- (72) Inventors: PLATT, Michael; 1904 Seneca Lane, Mt. Prospect, IL 60056 (US). LABEDZ, Ralph; 5618 Wilmet Road, McHenry, IL 60050 (US). HOVIS, Patrick; 5157 Pepper Drive, Rockford, IL 61114 (US). For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AIR IN-LINE SENSOR FOR AMBULATORY DRUG INFUSION PUMP

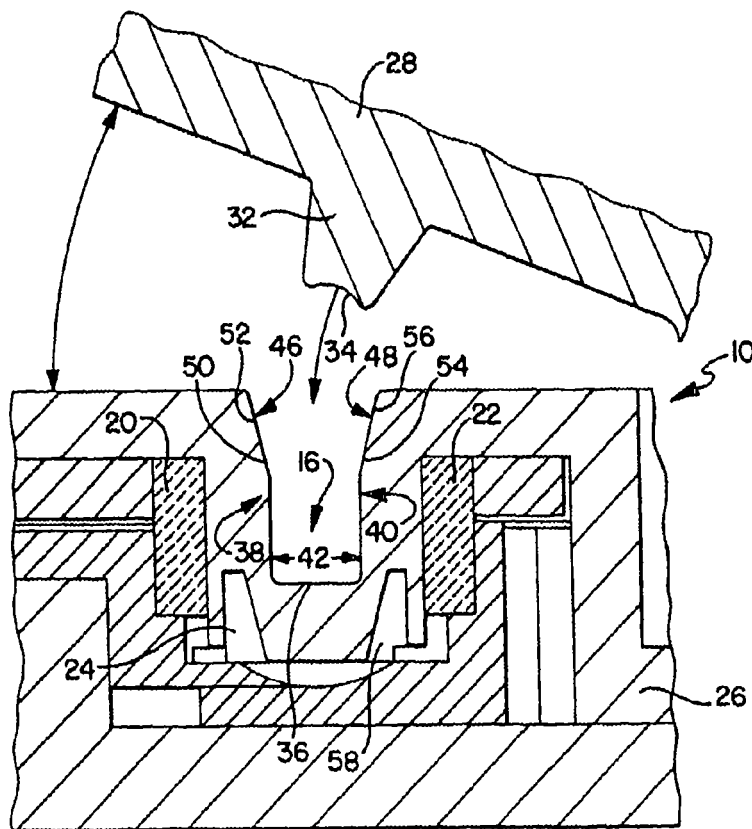

(57) Abstract: An air in-line sensor (10) for detecting air bubbles in a therapeutic solution flowing through a tube (12) utilizes a unitary type sensor having a channel (16) for receiving the tube (12). The channel (16) has a tube loading section (18). A signal emitting member (20) is positioned on one side of the tube (12) and a signal receiving member (22) is positioned on an opposite side of the tube (12). A first air baffle (24) is positioned between the signal emitting (20) and signal receiving members (22).



162162



ACTION

WO 02/055137 A3