



(51) International Patent Classification:

H01M 2/04 (2006.01) H01M 10/04 (2006.01)
H01M 2/08 (2006.01) H01M 2/02 (2006.01)
H01M 2/26 (2006.01) H01M 10/40 (2006.01)
H01M 2/30 (2006.01)

Matthew [US/US]; 19500 Boston Street NW, Elk River, Minnesota 55330 (US). FLEMMER, Theodore L. [US/US]; 15565 90th Street NE, Elk River, Minnesota 55330 (US). MCKINLEY, Steven J. [US/US]; 8225 Hames Road So., Cottage Grove, Minnesota 55016 (US).

(21) International Application Number:

PCT/US2009/000966

(74) Agents: BJORKMAN, Dale, A. et al.; Kagan Binder, PLLC, Suite 200, Maple Island Building, 221 Main Street North, Stillwater, Minnesota 55082 (US).

(22) International Filing Date:

17 February 2009 (17.02.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/067,288 27 February 2008 (27.02.2008) US

(71) Applicant (for all designated States except US): CYMBET CORPORATION [US/US]; 18326 Joplin Street N.W., Elk River, Minnesota 55330 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SHAKESPEARE, Stuart K. [US/US]; 2675 Vega Avenue, Mayer, Minnesota 55360 (US). STANISLOWSKI, Stanley J. [US/US]; 11073 196th Lane NW, Elk River, Minnesota 55330 (US). HOLMQUIST, Debra A. [US/US]; 19655 154th Street NW, Elk River, Minnesota 55330 (US). KROELLS, Darren [US/US]; 6307 Winsdale Street N., Golden Valley, Minnesota 55427 (US). FLATLAND,

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: BATTERY LAYOUT INCORPORATING FULL METAL EDGE SEAL

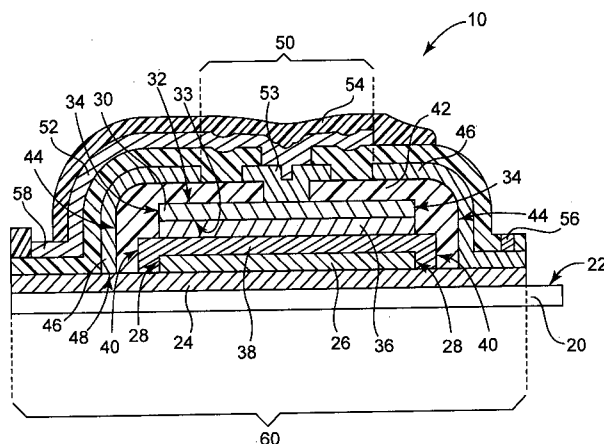


Fig. 1

(57) Abstract: The battery comprises a'n anode current collector and the other is a cathode current collection, cathode material being located on the cathode current collector; an electrolyte layer having a perimeter, the electrolyte separating the cathode material from the anode current collector; an insulation layer having a perimeter, the insulation layer together with the electrolyte layer separating the anode current collector from the cathode material and the cathode current collector. A first passivation layer (46) generally overlies at least the perimeter of the cathode material, the perimeter of the electrolyte, and the perimeter of the insulation layer, the first passivation layer (46) being electrically coupled to the first current collector and forming a continuous metal to metal seal around a defined area of the first current collector. The first passivation layer (46) has a via opening (50). A second passivation layer (53) is electrically coupled to the second current collector through the via opening (50) of the first passivation layer (46).

WO 2009/108276 A1



Published:

— *with international search report (Art. 21(3))*