



(43) International Publication Date
27 September 2012 (27.09.2012)

- (51) International Patent Classification:
B62D 12/00 (2006.01) *B62D 55/065* (2006.01)
B62D 53/02 (2006.01)
- (21) International Application Number:
PCT/SE2012/050301
- (22) International Filing Date:
19 March 2012 (19.03.2012)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:
1150257-2 23 March 2011 (23.03.2011) SE
- (71) Applicant (for all designated States except US): **BAE SYSTEMS HÄGGLUNDS AKTIEBOLAG** [SE/SE]; S-891 82 Ömsköldsvik (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **THORÉN, Max** [SE/SE]; Tjärn 117, S-891 92 Ömsköldsvik (SE). **CARLSSON, Martin** [SE/SE]; Sockenvägen 5, S-891 55 Arnäsfall (SE).
- (74) Agent: **ALBIHNS.ZACCO AB**; Valhallavägen 117, P.O. Box 5581, S-114 85 Stockholm (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

- with international search report (Art. 21(3))

(54) Title: STEERING DEVICE FOR ARTICULATED VEHICLE

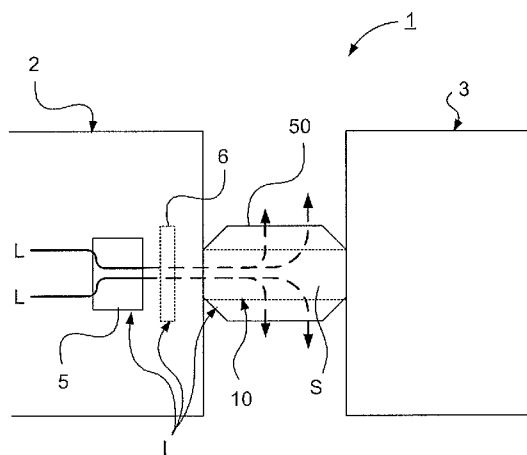


Fig. 2

(57) Abstract: The present invention relates to a steering device (I) comprising a steering member (10) for mutually steering a first vehicle unit (2) and a second vehicle unit (3) of an articulated vehicle (1) comprising means (30, 32) for mutually pivoting said vehicle units, wherein the steering device comprises a housing configuration (50) arranged to form a supply space between said vehicle units (2, 3), comprising means (5, 6, 8, S; 60, 62, A, O) arranged for removal of stuff in the supply space (S) incoming from the surrounding. The invention also relates to an articulated vehicle with a steering member.

