

(19) World Intellectual Property Organization
International Bureau



G00002

(43) International Publication Date
21 November 2002 (21.11.2002)


PCT

(10) International Publication Number
WO 02/092900 A1

- (51) International Patent Classification⁷: D06F 57/12 (81) Designated States (*national*): AU, CA, CN, DE, GB, ID, JP, KR, NZ, SG, US, VN, ZA.
- (21) International Application Number: PCT/SG02/00081 (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (22) International Filing Date: 8 May 2002 (08.05.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0102830-7 12 May 2001 (12.05.2001) SG
- (71) Applicant and (72) Inventor: YIAP, Hang, Boon [SG/SG]; Bk 232, Bishan Street 22, #02-102, Singapore 570232 (SG).
- Declaration under Rule 4.17:
— of inventorship (Rule 4.17(iv)) for US only
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DCS
COPY

(54) Title: FOLDABLE CLOTHES-DRYING RACK CUM SUN-SHADING DEVICE

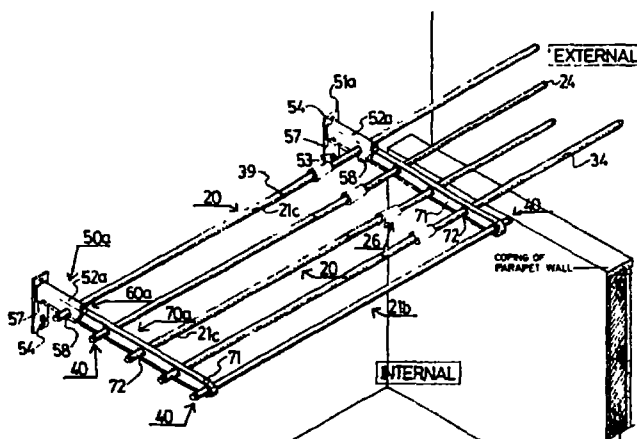

(57) Abstract: An improved foldable clothes-drying rack comprising: a plurality of H-shaped mounting bracket (50a), a plurality of supporting arms (70a), wherein an arm (71) of the supporting arm (70a) is articulated in a foldable manner to be slidably retained by a snap-pin device (60a) within a bore (55a) of an H-shaped housing (52a) of the bracket (50a), and the arm (71) are further provided with sequentially opening (72) for a plurality of poles and pole assemblies (21c & 20). The pole assemblies (20) comprising of a tube (34) inserted into a pole (21c), one end (25) portion of the pole (21c) is inserted with a control-pin device (40) for engagement into a notch (73) of the opening (72), the opposite end (25a) include a pole-fastening device (26) that facilitated frictional clamping onto outer periphery of the tube (34). Furthermore, the inserted end (23) of the tube (34) includes a tube-fastening device (35) that facilitated outwardly frictional pressing onto the internal slidability surface of the pole (21c), the remaining longitudinal drawing out length of the tube (34) extend thru the opening (72) of the opposite arm (71) for outdoor clothes drying.

WO 02/092900 A1