



(51) International Patent Classification:
E21B 19/14 (2006.01)

(21) International Application Number:
PCT/US2009/062240

(22) International Filing Date:
27 October 2009 (27.10.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/259,248 27 October 2008 (27.10.2008) US

(71) Applicant (for all designated States except US): **T&T ENGINEERING SERVICES** [US/US]; 13430 Northwest Freeway, Suite 204, Houston, TX 77040 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ORGERON, Keith, J.** [US/US]; 13430 Northwest Freeway, Suite 204, Houston, TX 77040 (US).

(74) Agent: **EGBERT, John S.**; Egbert Law Offices PLLC, 412 Main St., 7th Floor, Houston, TX 77002 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,

[Continued on next page]

(54) Title: HEADER STRUCTURE FOR A PIPE HANDLING APPARATUS

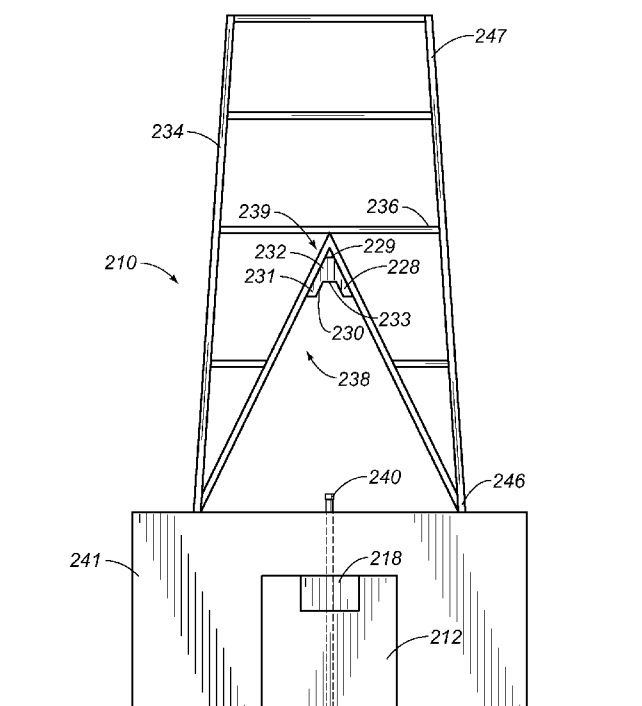


FIG. 12

(57) Abstract: A system has a pipe handling apparatus (10) with an arm (24) moving between a first position and a second position, a derrick (234) having a window (238) through which the pipe handling system delivers a pipe to a well head, and a header (228) mounted in the window of the derrick. The header receives the arm (24) of the pipe handling system when the arm is in the second position. An outside surface of the header (228) suitably fits within the window of the derrick. An inside surface of the derrick suitably receives the arm. The inside surface resists an upward motion and a sideways motion of the arm. The header (228) has a body that has a head and legs.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, —
ML, MR, NE, SN, TD, TG).

*before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

(88) Date of publication of the international search report:

22 July 2010