

DESCRIPTION

FLUOROPOLYMER COATING COMPOSITION AND COATED ARTICLE

5

TECHNICAL FIELD

10 The present invention relates to a fluoropolymer coating composition and a coated article.

BACKGROUND ART


15 An anionic surfactant has been hitherto added, as an auxiliary for forming a film, to a fluoropolymer coating composition. However there were drawbacks such that since foaming is apt to occur, pin holes are easy to be produced and that, since film forming property is
20 insufficient and thick coating is difficult, corrosion resistance and non-sticking property are lowered due to abrasion of a coating film.

 An object of the present invention is to provide the fluoropolymer coating composition which incorporates
25 a specific polyether type resin particularly in the form of emulsion and is capable of coating thick and forming a coating film excellent in abrasion resistance, corrosion resistance and non-sticking property, and to provide the article coated with that fluoropolymer coating
30 composition.

DISCLOSURE OF THE INVENTION

35 The present invention relates to the fluoropolymer coating composition which comprises fine particles of a fluoropolymer, 0.1 to 300 % by weight of the polyether type resin on the basis of a weight of the

above-mentioned fine particles, and a liquid carrier, and the polyether type resin is a resin represented by the formula (I):



wherein R^1 is the same or different and each is hydrogen or an alkyl having 1 to 20 carbon atoms, Y^1 is the same or different and each is ether, ester, urethane or thionyl,
10 A is alkylene oxide residual group having at least 3 carbon atoms (A molecular weight of an alkylene oxide moiety obtained by polymerization is 1×10^3 to 1×10^4), B is urethane, thionyl or phosphoric acid residual group (in the parenthesis is represented a residual group
15 obtained through alternating copolymerization), and a temperature where the above-mentioned resin is decomposed and vaporized is in the range up to a decomposition temperature of the fluoropolymer.

Also the present invention relates to the
20 article coated with the above-mentioned fluoropolymer coating composition as a top coat so as to form at least 30 μ m thick molten coating film.

25 BEST MODE FOR CARRYING OUT THE INVENTION

The present invention provides the fluoropolymer having a major feature of particularly making thick coating possible by employing the specific polyether type
30 resin in the form of emulsion.

The above-mentioned specific polyether type resin is a resin represented by the formula (I):



and is hydrophobic and dispersive in water and has no surface activity since no ethylene oxide residual group is contained. The specific polyether type resin is

decomposed and vaporized in a temperature range up to a decomposition temperature of the fluoropolymer used in the present invention (namely, low temperature decomposition property).

5 It is preferable from the viewpoint of hydrophobic property that the above-mentioned R^1 is the same or different and each is hydrogen or an alkyl having 1 to 20 carbon atoms.

10 It is preferable from the viewpoint of thermal decomposition property that the above-mentioned Y^1 is the same or different and each is ether, ester, urethane or thionyl.

15 It is preferable from the viewpoint of hydrophobic property and dispersibility in water that the above-mentioned A is alkylene oxide residual group having not less than 3, preferably 3 or 4 carbon atoms and that a molecular weight of the alkylene oxide moiety obtained by polymerization is from 1×10^3 to 1×10^4 .

20 It is preferable from the viewpoint of thermal decomposition property that the above-mentioned B is urethane, thionyl or phosphoric acid residual group.

 It is preferable that the group in the parenthesis of the formula (I) is a residual group obtained through alternating copolymerization.

25 The polyether type resin represented by the formula (I) is hydrophobic and dispersive in water, and is used suitably in the form of resin emulsion from the viewpoint of stability and workability. Also since such a resin is emulsion, it is easily dispersed homogeneously
30 with the fluoropolymer particles.

 Examples of the resin represented by the formula (I) are, for instance, when the above-mentioned B is urethane,



wherein m is an integer of 1 to 1000, n is an integer of 45 to 455, $CONH - J^1 - NHCO$ represents, for example, tolylene


diisocyanate (TDI) type urethane residual group,
 hexamethylene diisocyanate (HMDI) type urethane residual
 group, isophorone diisocyanate (IPDI) type urethane
 residual group, xylylene diisocyanate (XDI) type urethane
 5 residual group, diphenylmethane diisocyanate (MDI) type
 urethane residual group and the like,



10 wherein m, n and J^1 are the same as above, and the like.
 From the viewpoint of thermal decomposition property, the
 structure (1) is preferable.

Also when the above-mentioned X is thionyl,
 there are

15




wherein m and n are the same as above, J^2 represents $=S=O$,




wherein m, n and J^2 are the same as above, and the like.
 From the viewpoint of thermal decomposition property, the
 structure (3) is preferable.

25

Also when the above-mentioned X is phosphoric
 acid residual group, there are



30 wherein m and n are the same as above, J^3 represents a
 residual group of a phosphoric acid,



35 wherein m, n and J^3 are the same as above, and the like.
 From the viewpoint of thermal decomposition property, the
 structure (5) is preferable.

In those examples, any of the groups in the

brackets is a residual group obtained through alternating copolymerization.

The fluoropolymer of the present invention is one of homopolymers of monoethylenically unsaturated hydrocarbon monomer being completely substituted by fluorine, chlorine or those two atoms, copolymers of at least two of the above-mentioned monomers or mixtures comprising at least two of the homopolymers and the copolymers.

Example of the above-mentioned homopolymers is polytetrafluoroethylene (PTFE).

Examples of the above-mentioned copolymers are, for instance, a tetrafluoroethylene-perfluoro(alkyl vinyl ether) copolymer (PFA) (the number of carbon atoms of the alkyl group is from 1 to 5) and tetrafluoroethylene-hexafluoropropylene (FEP) copolymer, and PFA is preferable in view of its excellent non-sticking property and heat resistance.

Examples of the above-mentioned mixtures of the homopolymers and the copolymers are, for instance, a mixture of PTFE and PFA, a mixture of PTFE and FEP, a mixture of PTFE, PFA and FEP, a mixture of PFA and FEP and the like, and the mixture of PTFE and PFA is preferable in view of its excellent non-sticking property and heat resistance.

A number average molecular weight of the above-mentioned fluoropolymer is from 2×10^4 to 1×10^7 , and 2×10^5 to 8×10^6 is preferable. When the number average molecular weight is less than 2×10^4 , the coating film tends to become fragile, and when more than 1×10^7 , there is a tendency that the particles are not fused with each other because its melt viscosity is too high.

The number average molecular weight of PTFE can be obtained, for example, through the measuring method described in Vol. 17, pages 3,253 to 3,257 of "Journal of Applied Polymer Science" (1973).

Also the number average molecular weight of FEP can be obtained through the method described in ASTM

D-2116 by measuring a melt flow rate (MFR), calculating a melt viscosity (MV) based on the equation (1) and then calculating the number average molecular weight (Mn) based on the equation (2).

5

Equation (1) : $MV =$

$$\frac{\pi \times \text{Applied pressure (kgf/mm}^2\text{)} \times \text{Radius of orifice (mm)}}{8 \times \text{MFR} \times \text{Length of orifice (mm)}}$$

10

$$\text{Equation (2) : } \overline{Mn} = 3.4 \sqrt{\frac{MV}{162 \times 10^{-13}}}$$

15

The above-mentioned fine particles of the fluoropolymer may be fine particles being obtained, for example, through emulsion polymerization or the like of fluoroolefin, and the average particle size thereof is from 0.01 to 100 μm , and 0.1 to 5 μm is preferable. When
20 the particle size is less than 0.01 μm , a film forming property tends to be lowered, and when more than 100 μm , a gun nozzle used for coating tends to be plugged.


Also in the present invention, there can be used an aqueous dispersion of the fine particles of the
25 fluoropolymer obtained through the above-mentioned emulsion polymerization or fine particles in the form of a powder which are obtained from the above-mentioned aqueous dispersion. From the viewpoint of stability, which is affected by electrical repulsion of the particles, it is
30 preferable to use in the form of the aqueous dispersion, and from the viewpoint of the film forming, its solid concentration is from 20 to 80 % by weight, preferably from 40 to 70 % by weight.

In the present invention, the following
35 hydrophilic polyether type high molecular surfactants can be used together with the above-mentioned polyether type resin which is hydrophobic and dispersive in water and has no surface activity, from a point of making it possible to coat thick. Example of the polyether type high molecular


surfactant is, for instance, one represented by the formula (II):



5 wherein R is hydrogen or an alkyl having 1 to 20 carbon atoms, Y is ether, ester, urethane, thionyl or phosphoric acid residual group, C is ethylene oxide residual group, D is propylene oxide residual group, a is an integer of 30
10 to 2,000, b is an integer of 20 to 500, c is an integer of 1 to 10 ($-(C_a-Db)_c$ represents a residual group obtained through alternating copolymerization or random copolymerization),
the formula (III):



15 wherein R, Y, C, D and b are the same as above, the sum of a and d is an integer of 30 to 2,000,
20 the formula (IV):




25 wherein R, Y, C and D are the same as above, the sum of a and d is an integer of 20 to 500, b is an integer of 30 to 2,000,
the formula (V):




30 wherein Z is a polyvalent aliphatic saturated hydrocarbon residual group having 1 to 5 carbon atoms, R is hydrogen or an alkyl having 1 to 20 carbon atoms, Y is ether, ester, urethane, thionyl or phosphoric acid residual
35 group, C is ethylene oxide residual group, D is propylene oxide residual group, a is an integer of 30 to 2,000, b is an integer of 20 to 500, c is an integer of 1 to 10, e is an integer of 1 to 4 ($-(C_a-Db)_c$ represents a residual

group obtained through alternating copolymerization or random copolymerization),
the formula (VI):



wherein Z, R, Y, C, D and b are the same as in the formula (V), the sum of a and d is an integer of 30 to 2,000, e is an integer of 1 to 4,

10 the formula (VII):



wherein Z, R, Y, C and D are the same as in the formula
15 (V), the sum of a and d is an integer of 20 to 500, b is an integer of 30 to 2,000, e is an integer of 1 to 4,
or a mixture of at least two thereof. Those are hydrophilic because ethylene oxide residual group is contained therein.

20 In the formula (II), when R is the alkyl, the number of its carbon atoms is preferably from 1 to 18 in view of thermal decomposition property. It is preferable that Y is the ether or ester residual group in view of the thermal decomposition property. It is preferable that a
25 is an integer of 40 to 600 in view of the film forming property and the thermal decomposition property, and that b is an integer of 30 to 120 from the viewpoint of thickening property. In view of leveling property, c is preferably 1 to 5.

30 In the formula (III), when R is the alkyl, the number of its carbon atoms is preferably from 1 to 18 in view of the thermal decomposition property. It is preferable that Y is the ether or ester residual group in view of the thermal decomposition property. It is
35 preferable that a is an integer of 20 to 300 in view of the film forming property and the thermal decomposition property, and that b is an integer of 30 to 120 from the viewpoint of the thickening property. In view of the film

forming property and the thermal decomposition property, d is preferably an integer of 20 to 300.

In the formula (IV), when R is the alkyl, the number of its carbon atoms is preferably from 1 to 18 in view of the thermal decomposition property. It is preferable that Y is the ether or ester residual group in view of the thermal decomposition property. It is preferable that a is an integer of 15 to 60 in view of the thickening property and the thermal decomposition property, and that b is an integer of 40 to 600 from the viewpoint of the film forming property. In view of the thickening property and the thermal decomposition property, d is preferably an integer of 15 to 60.

In the formula (V), it is preferable that the number of carbon atoms of Z is 2 or 3 in view of the thickening property and the thermal decomposition property, and that when R is the alkyl, the number of its carbon atoms is from 1 to 18 in view of the thickening property and the thermal decomposition property. Y is preferably the ether or ester residual group from the viewpoint of the thermal decomposition property. It is preferable that a is an integer of 40 to 600 in view of the film forming property and the thermal decomposition property, b is an integer of 30 to 120 in view of the thickening property, c is from 1 to 5 in view of the leveling property and e is 1 from a point that the decomposition property is good when the coating is baked.

In the formula (VI), it is preferable that the number of carbon atoms of Z is 2 or 3 in view of the thickening property and the thermal decomposition property, and that when R is the alkyl, the number of its carbon atoms is from 1 to 18 in view of the thermal decomposition property. Y is preferably the ether or ester residual group from the viewpoint of the thermal decomposition property. It is preferable that a is an integer of 20 to 300 in view of the film forming property and the thermal decomposition property, b is an integer of 30 to 120 in view of the thickening property, d is from 20

to 300 in view of the film forming property and the thermal decomposition property and e is 1 from a point that the decomposition property is good when the coating is baked.

5 In the formula (VII), it is preferable that the number of carbon atoms of Z is 2 or 3 in view of the thickening property and the thermal decomposition property, and that when R is the alkyl, the number of its carbon atoms is from 1 to 18 in view of the thermal
10 decomposition property. Y is preferably the ether or ester residual group from the viewpoint of the thermal decomposition property. It is preferable that a is an integer of 15 to 60 in view of the thickening property and the thermal decomposition property, b is an integer of 40
15 to 600 in view of the film forming property, d is from 15 to 60 in view of the thickening property and the thermal decomposition property and e is 1 from a point that the decomposition property is good when the coating is baked.

20 The above-mentioned polyether type high molecular surfactant has the thickening and film forming functions, and is, for example, a hydrophilic high molecular surfactant having a lipophilic portion at the propylene glycol moiety and a hydrophilic portion at the
25 ethylene glycol moiety. The surfactant is decomposed and vaporized in a temperature range from around 250°C to a melting temperature of the above-mentioned fluoropolymer, and is capable of being in the form of an alternating copolymer (for example, in case of $a = b = 1$ in the
30 formula (II) or (V)), a block copolymer (for example, the formula (III), (IV), (VI) or (VII)), a random copolymer (for example, the formula (II) or (V)) and the like. From the viewpoint of easiness of the thickening, at least one block copolymer represented by the formula (III) is most
35 preferable.

 The weight average molecular weight of the ethylene glycol moiety of those polyether type high molecular surfactants is from 1×10^3 to 2×10^5 ,

preferably from 2×10^3 to 8×10^4 , more preferably from 8×10^3 to 5×10^4 , and the weight average molecular weight of the propylene glycol moiety is from 1×10^2 to 3×10^4 , preferably from 1×10^3 to 3×10^4 , more preferably from 2×10^3 to 1×10^4 .

When the weight average molecular weight of the above-mentioned ethylene glycol moiety is less than 1×10^3 , there is a tendency that phase separation occurs and thus uniform dispersion is not obtained. When more than 2×10^5 , there is a tendency that the dispersion is thickened too much, which makes spraying impossible. When the weight average molecular weight of the above-mentioned propylene glycol moiety is less than 1×10^2 , there is a tendency that running or dropping of a coating is apt to occur due to insufficient thickening and cracks occur on the dropped portion of the coating at the time of baking. When more than 3×10^4 , there is a tendency that the dispersion is thickened too much, which makes spraying impossible.

Examples of the polyether type high molecular surfactant represented by the formula (II) are, for instance,

(7) a random polymer represented by
 $\text{HO}(\text{CH}_2\text{CH}_2\text{O})_a(\text{CH}(\text{CH}_3)\text{CH}_2\text{O})_b\text{H}$

wherein a is 300, b is 75,

(8) a random polymer represented by
 $\text{C}_{17}\text{H}_{35}\text{COO}(\text{CH}_2\text{CH}_2\text{O})_a(\text{CH}(\text{CH}_3)\text{CH}_2\text{O})_b\text{COC}_{17}\text{H}_{35}$

wherein a is 300, b is 75

and the like, and the structure (7) is preferable in view of the thermal decomposition property.

Examples of the polyether type high molecular surfactant represented by the formula (III) are, for instance, block polymers represented by;

(9) $\text{HO}(\text{CH}_2\text{CH}_2\text{O})_a(\text{CH}(\text{CH}_3)\text{CH}_2\text{O})_b(\text{CH}_2\text{CH}_2\text{O})_d\text{H}$

wherein the sum of a and d is 364, b is 69,

(10) $\text{C}_{17}\text{H}_{35}\text{COO}(\text{CH}_2\text{CH}_2\text{O})_a(\text{CH}(\text{CH}_3)\text{CH}_2\text{O})_b(\text{CH}_2\text{CH}_2\text{O})_d\text{COC}_{17}\text{H}_{35}$

wherein the sum of a and d is 300, b is 60, and the like, and the structure (9) is preferable in view of the thermal

decomposition property.

Examples of the polyether type high molecular surfactant represented by the formula (IV) are, for instance, block polymers represented by;



wherein the sum of a and d is 64, b is 350,

(12)




wherein the sum of a and d is 60, b is 310, and the like,

10 and the structure (11) is preferable in view of the thermal decomposition property.


Examples of the polyether type high molecular surfactant represented by the formula (V) are, for instance,

15 (13) a random polymer represented by;

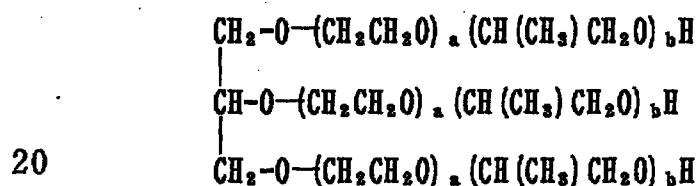

wherein a is 300, b is 75,


(14) a random polymer represented by;

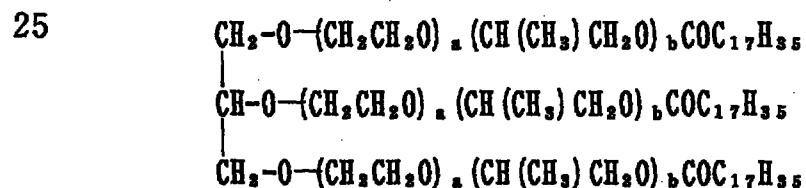


30 wherein a is 300, b is 75, and the like, and the structure (13) is preferable in view of the thermal decomposition property.

Examples of the polyether type high molecular surfactant represented by the formula (VI) are, for instance, block polymers represented by;

35

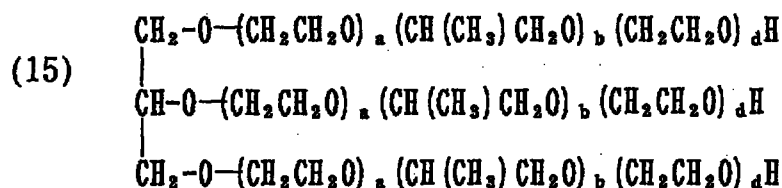


5 wherein the sum of a and d is 364, b is 69,

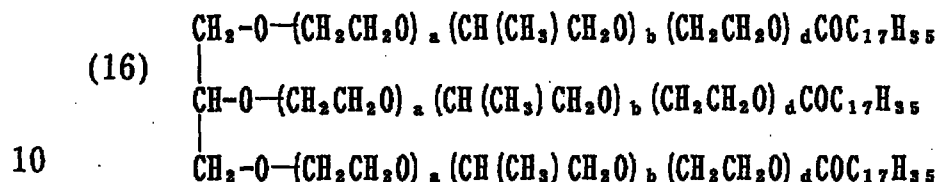


wherein the sum of a and d is 300, b is 60, and the like, and the structure (15) is preferable in view of the thermal decomposition property.

15 Examples of the polyether type high molecular surfactant represented by the formula (VII) are, for instance, block polymers represented by;

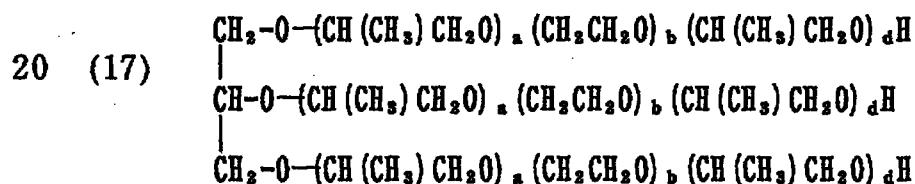

wherein the sum of a and d is 64, b is 350,

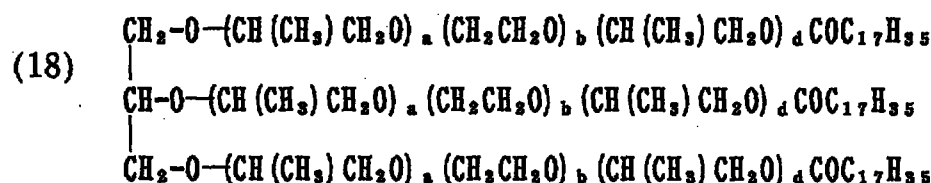

wherein the sum of a and d is 60, b is 310, and the like, and the structure (17) is preferable in view of the thermal decomposition property.

35 In the present invention, in case where the polyether type high molecular surfactant represented by the formula (II), (III) or (IV) is solely used, the formula (III) is preferable in view of easiness of the thickening, and in case where at least two surfactants are used, for

example, all combinations of the formulae (II) to (IV) are possible and a combination of (II) and (III) is preferable from a point that the leveling property is given by thickening. In that case, the preferred combination of
5 the above-mentioned examples is, for instance, (7) and (9) or (10), (8) and (9) or (10) or the like in view of the thermal decomposition property.

Also in the present invention, in case where the polyether type high molecular surfactant represented by
10 the formula (V), (VI) or (VII) is solely used, the formula (VI) is preferable in view of easiness of the thickening, and in case where at least two surfactants are used, for example, all combinations of the formulae (V) to (VII) are possible and a combination of (V) and (VI) is preferable
15 from a point that the leveling property is given by thickening. In that case, the preferred combination of the above-mentioned examples is, for instance, (13) and (15) or (16), (14) and (15) or (16) or the like in view of the thermal decomposition property.

20 In case of a combination use with the polyether type resin represented by the above-mentioned formula (I), the polyether type high molecular surfactant represented by the formula (II) is preferable.

Examples of the liquid carrier in the present
25 invention are, for instance, water; a mixture of water with an alcohol such as methyl alcohol, ethyl alcohol, propyl alcohol or isopropyl alcohol, a polyhydric alcohol such as ethylene glycol, diethylene glycol, triethylene glycol or glycerin, a ketone such as acetone, an amine
30 such as diethylamine, triethylamine, ethanolamine, diethanolamine or triethanolamine, an ether such as tetrahydrofuran, or the like. Among them, water and a mixture of water with diethanolamine are preferable to prevent coagulation of fluorine-containing polymer
35 particles and from the viewpoint of the film forming property.

Further in the present invention, for example, nonpolar solvent such as toluene, xylene or an aromatic

hydrocarbon having 9 to 11 carbon atoms can be used as the liquid carrier in such an amount as not impairing physical properties of the composition, for example, in an amount of not more than 15 % (% by weight, hereinafter the same) in the composition.

In the present invention, a filler such as mica particles, mica particles coated with pigment, metal flakes or a mixture of at least two thereof can be added. Those fillers have a function of enhancing abrasion resistance, and from a point of giving a good appearance to a coating film, mica is preferable.

The size of the mica particles is from 10 to 100 μm , preferably from 15 to 50 μm . When the particle size is less than 10 μm , the abrasion resistance of the coating film tends to be lowered, and when more than 100 μm , the non-sticking property tends to be lowered.

The mica particles coated with pigment are ones prepared by coating the above-mentioned mica particles with a pigment, for example, TiO_2 , Fe_2O_3 or the like through vapor-deposition and sintering method.

Examples of the metal flakes are, for instance, titanium, zirconium, aluminum, zinc, antimony, tin, iron, nickel and the like. Titanium and zirconium are preferable in that they are hard to rust, and their size is from 10 to 100 μm . When less than 10 μm , the abrasion resistance of the coating film tends to become worse, and when more than 100 μm , the non-sticking property tends to be lowered.

In the present invention, there can be used various additives, for example, a drying agent such as cobalt oxide; a defoaming agent such as silicone oil; a thickener such as methyl cellulose, PVA or carboxylated vinyl polymer; a leveling agent such as an aromatic hydrocarbon having 9 to 11 carbon atoms or a glycol type solvent; a pigment such as titanium oxide, red oxide or carbon black; and the like. Those additives may be added through usual method. The amount of addition thereof is not more than 50 %, preferably not more than 35 % on the

basis of a weight of the above-mentioned fluoropolymer. When more than 50 %, the non-sticking property tends to be lost.

5 The amounts of both the above-mentioned specific polyether type resin and polyether type high molecular surfactant are from 0.1 to 300 %, preferably from 0.5 to 100 %, more preferably from 1 to 30 %, respectively on the basis of a weight of the fine particles of the above-mentioned fluoropolymer. When less than 0.1 %, there is
10 no effect of the addition, and when more than 300 %, the coating film cannot be formed.

The amount of the above-mentioned filler is from 0.2 to 20 %, preferably from 1 to 15 %, more preferably from 2 to 10 % on the basis of the total weight of the
15 filler and the fluoropolymer. When less than 0.2 %, the abrasion resistance of the coating film tends to become worse, and when more than 20 %, the non-sticking property tends to be lowered.

The solid concentration of the fluoropolymer
20 coating composition of the present invention is from 20 to 80 %, preferably from 40 to 70 %. When the concentration is less than 20 %, the coating film tends not to be formed, and when more than 80 %, there is a tendency that spraying cannot be conducted.

25 In order to prepare the fluoropolymer coating composition of the present invention, there is, for example, the following method.

A vessel equipped with a stirrer is charged with 90 to 110 parts (part by weight, hereinafter the same) of
30 the aqueous dispersion of the fluoropolymer fine particles, and with stirring, thereto are added in turn 0.1 to 10.8 parts of the filler, 0.05 to 162 parts of the specific polyether type resin, 0.05 to 162 parts of the polyether type high molecular surfactant when used, 2 to
35 22 parts of the liquid carrier and if necessary, 0.05 to 10 parts of the additive. The obtained mixture is stirred at 5° to 30°C for 10 to 40 minutes until a uniform dispersion is obtained. Then the fluoropolymer coating

composition of the present invention can be prepared.

The composition of the present invention may be applied to various substrates through usual methods. For example, after sand-blasting a surface of metal, enamel, glass, ceramic or the like to be made rough, the substrate is undercoated with a primer mixture (Polyflon TFE Enamel EK-1909BKN available from Daikin Industries, Ltd.) and then coating is carried out by dipping in the composition, spraying or coating by means of a roller or a doctor blade. Further the coated substrate is subjected to baking for 10 to 30 minutes at a temperature (340° to 415°C) enough for the fluoropolymer in the coated composition to be melted.

The thickness of the molten coating film is not less than 30 μm . Though there is particularly no upper limit of the thickness, when more than 70 μm , a sludge of the above-mentioned specific polyether type resin and the polyether type high molecular surfactant remains in the coating film and the non-sticking property is suddenly lowered. It is preferable, therefore, that the thickness is from 30 to 70 μm .

The composition of the present invention is most useful, for example, for coating on metal cooking tools, particularly a frying pan, and can also be used for coating on the other products requiring corrosion resistance. Examples of these products are, for instance, those made of glass or materials resistant to the baking temperature thereof, such as bearing, valve, wire, metal foil, boiler, pipe, ship bottom, inner lining of electric oven, bottom plate of iron, bread baking mold, rice-cooker, grill pan, electric pot, ice-making tray, snow shovel, plow, chute, conveyor, roll, metal die, dice, a tool such as saw, file or drill, cooking knife, hopper, and in addition, container (particularly for semiconductor industry) and molding die for industrial use.

As the fluoropolymer coating composition of the present invention, there are preferably exemplified, for example, the following compositions.

(1)

(A) Fine particles of the fluoropolymer

(B) Polyether type resin represented by the formula (I)

0.1 to 300 % based on the weight of (A)

5 (C) Liquid carrier

This composition makes it possible to coat thick and form a coating film excellent in abrasion resistance, corrosion resistance and non-sticking property, and the quality of the article coated with that composition can be
10 maintained for a long period of time.

More preferably,

(A1) Fine particles of a tetrafluoroethylene polymer

(B) Polyether type resin represented by the formula (I)

15 0.1 to 300 % based on the weight of (A1)

(C) Liquid carrier

This composition makes it possible to coat thicker and form a coating film excellent in abrasion
20 resistance, corrosion resistance and non-sticking property, and the quality of the article coated with that composition can be maintained for a longer period of time.

25 Particularly more preferably,

(A2) Fine particles of PTFE, PFA and/or FEP

(B) Polyether type resin represented by the formula (I)

0.1 to 300 % based on the weight of (A2)

(C) Liquid carrier

30

This composition makes it possible to form a coating film further excellent in gloss and corrosion resistance, and the quality of the article coated with that composition can be maintained for a long period of
35 time.

(2)

(A) Fine particles of the fluoropolymer

(B) Polyether type resin represented by the formula (I)

0.1 to 300 % based on the weight of (A)

(C) At least one polyether type high molecular surfactant
represented by the formulae (II) to (VII)

5 0.1 to 300 % based on the weight of (A)

(D) Liquid carrier

This composition makes it possible to coat
thick and form a coating film excellent in abrasion
resistance, corrosion resistance and non-sticking
10 property, and the quality of the article coated with that
composition can be maintained for a long period of time.

More preferably,

(A1) Fine particles of a tetrafluoroethylene polymer

15 (B) Polyether type resin represented by the formula (I)

0.1 to 300 % based on the weight of (A1)

(C1) At least one polyether type high molecular
surfactant represented by the formula (II)

0.1 to 300 % based on the weight of (A1)

20 (D) Liquid carrier

This composition makes it possible to form a
coating film more excellent in thick coating, and the
quality of the article coated with that composition can
25 be maintained for a longer period of time.

More preferably,

(A2) Fine particles of PTFE, PFA and/or FEP

(B1) Polyether type resin represented by the formula (I),
30 wherein R¹ is hydrogen atom

0.1 to 300 % based on the weight of (A2)

(C2) Polyether type high molecular surfactant represented
by the formula (II), wherein R is hydrogen atom

0.1 to 300 % based on the weight of (A2)

35 (D) Liquid carrier

This composition makes it possible to form a
coating film more excellent in thick coating, gloss and

The present invention is then explained by
5 means of Examples, but is not limited thereto.

Example 1

10 The following components were mixed in the order described below.

- | | | |
|-----|---|-------------|
| (1) | Aqueous PTFE dispersion (Polyflon TFE Dispersion D-1 available from Daikin Industries, Ltd., aqueous dispersion containing 60 % solids (containing polyoxyethylene alkyl phenol ether (EO = 10) as a dispersing stabilizer in an amount of 6 % on the basis of PTFE)) | 150.0 parts |
| (2) | Polyether type resin emulsion (Permarine UA-200 available from Sanyo Kasei Kogyo Kabushiki Kaisha, emulsion being free of an emulsifying agent and prepared by jointing polytetramethylene glycol with urethane, molecular weight: about 2000, solid content: 30 %) | 6.0 parts |
| (3) | 25 % Aqueous solution of sodium lauryl sulfate | 3.6 parts |
| (4) | Toluene | 1.6 parts |
| (5) | Deionized water | 15.0 parts |

Tests were carried out with respect to physical
30 properties of the obtained coating composition.

The tests were conducted in the following manner.

Physical properties of coating composition

35 Viscosity: Measured by using a model B rotational viscometer (No. 2 rotor) and rotating it at a rate of 60 rpm for two minutes (temperature: 25°C).

pH: Measured with a pH meter through normal method.

Solid content: An amount of 10 g of the coating composition was measured in an aluminum cup, and after baking at 380°C for 45 minutes, a weight of solid content was measured.

5

The results are shown in Table 1.

Subsequently, on an aluminum frying pan subjected to sand-blasting and undercoating of a primer mixture (Polyflon TFE Enamel EK-1909BKN (containing polyamideimide) available from Daikin Industries, Ltd.) so that its thickness after drying became 15 μm was spray-coated the composition of the present invention prepared by mixing the above-mentioned components (1) to (5) in such an amount that its thickness after baking became 35 μm , followed by baking at 380°C for 15 minutes, to give the aluminum frying pan having a total coating thickness of 50 μm including a top coat of the composition of the present invention. With respect to physical properties of the coating film, the following tests were carried out.

15

20

Physical properties of coating film

Critical coating thickness at cracking:

25

Non-blasted aluminum plate was spray-coated with the coating composition, and was subjected to baking under the above-mentioned baking conditions. The measurement was made with an electromagnetic thickness meter.

Pencil hardness:

30

Tested in accordance with JIS K 5400-Testing Methods for Organic Coatings.

Spiral scoring test:

Tested in accordance with JIS K 5400-Testing Methods for Organic Coatings.

Taper-abrasion resistance test:

35

Tested in accordance with JIS K 5400-Testing Methods for Organic Coatings.

Boiling water resistance test:

Tested in accordance with JIS K 5400-Testing

Methods for Organic Coatings. When the coating was not peeled off, it was evaluated as "Good", and when the coating was peeled off, it was evaluated as "Blistering occurred".

5 Salt water spray test:

Tested in accordance with JIS K 5400-Testing Methods for Organic Coatings. When the coating was not peeled off, it was evaluated as "Good", and when the coating was peeled off, it was evaluated as "Blistering occurred".

10 Non-stickiness test:

A stainless mesh of 2 mm² measure was fit to a PTFE vessel (inside diameter 3.5 cm, outside diameter 4.8 cm, thickness 1.5 cm), and a mixture of 20 g of flour, 10 g of sugar and 40 g of water was poured into the vessel. The vessel was placed on the coated surface and heated at 200°C for seven minutes. Then the vessel was pulled up by using a spring balance to measure adhering force per unit area.

20 The results are shown in Table 1.

Example 2

25

The following components were mixed in the order described below.

- (1) Aqueous PTFE dispersion (Polyflon TFE Dispersion D-1 available from Daikin Industries, Ltd., aqueous dispersion containing 60 % solids (containing polyoxyethylene alkyl phenol ether (EO = 10) as a dispersion stabilizer in an amount of 6 % on the basis of PTFE)) 150.0 parts
- (2) Mica particles (particle size 30 μ m) coated with TiO₂ 6.5 parts
- 35 (3) Mill base (a mixture prepared by mixing a mixture of 55 parts of deionized water and 45 parts of cobalt blue oxide in a ball mill) 0.7 part
- (4) Polyether type resin emulsion (Permarine UA-200

available from Sanyo Kasei Kogyo Kabushiki Kaisha)

		6.0 parts
	(5) 25 % Aqueous dispersion of sodium lauryl sulfate	
		3.6 parts
5	(6) Toluene	1.6 parts
	(7) Deionized water	15.0 parts

Tests were carried out with respect to the obtained compositions in the same manner as in Example 1.

10 The results are shown in Table 1.

Also a coated article was obtained in the same manner as in Example 1 except that a thickness of the composition of the present invention after drying was 45 μm . The same tests as in Example 1 were carried out. The
15 results are shown in Table 1.

Comparative Example 1

20 A composition and an article coated therewith were obtained in the same manner as in Example 1 except that no polyether type resin emulsion was used and that a thickness of the composition as a top coat after drying was 10 μm (total thickness of the coating film: 25 μm).
25 The tests were carried out in the same manner as in Example 1, and the results are shown in Table 1.

Comparative Example 2

30

The following components were mixed in the order described below.

(1) Aqueous PTFE dispersion (Polyflon TFE Dispersion D-1 available from Daikin Industries, Ltd., aqueous
35 dispersion containing 60 % of solids (containing polyoxyethylene alkyl phenol ether (EO = 10) as a dispersion stabilizer in an amount of 6 % on the basis of PTFE))
150.0 parts

- (2) Mica particles (Particle size 30 μ m) coated with TiO_2 6.5 parts
- (3) Mill base (a mixture prepared by mixing a mixture of 55 parts of deionized water and 45 parts of cobalt blue oxide in a ball mill) 0.7 part
- (4) 25 % Aqueous solution of sodium lauryl sulfate 3.6 parts
- (5) Toluene 1.6 parts
- (6) Deionized water 10.0 parts

10

Tests were carried out with respect to the obtained composition in the same manner as in Example 1.

The results are shown in Table 1.

Table 1

	Ex. 1	Ex. 2	Com. Ex. 1	Com. Ex. 2
Mixing amount (part)				
Aqueous PTFE dispersion	150	150	150	150
Polyether type resin emulsion	6	6	—	—
Sodium lauryl sulfate	0.9	0.9	0.9	0.9
Mill base	—	0.7	—	0.7
Mica particles coated with TiO ₂	—	6.5	—	6
Toluene	1.6	1.6	1.6	1.6
Physical properties of coating composition				
Viscosity (cp)	250	280	180	220
pH	9	9	9	9
Solid content (%)	43	45	15	20
Physical properties of coating film				
Critical coating thickness at cracking (μ m)	45	50	12	18
Pencil hardness	H	H	H	H
room temp.				
200°C	F	F	HB	HB
Spiral scoring test	4.5	4.5	4.5	4.5
Taper-abrasion resistance test (mg/1000 times)	10	14	40	42
Boiling water resistance test 100 hrs.	Good	Good	Blistering occurred	Blistering occurred
Salt water spray test 100 hrs.	Good	Good	Blistering occurred	Blistering occurred
Non-stickiness test (g/cm ²)	12	12	14	16

As is clear from Table 1, it can be seen that the composition of the present invention, to which the specific polyether type resin represented by the formula (I) is incorporated, is excellent in the critical coating thickness at cracking, pencil hardness at 200°C, taper-abrasion resistance, resistance in boiling water and salt water spraying tests and non-sticking property.

10

INDUSTRIAL APPLICABILITY

As it is clear from the above-mentioned results, the fluoropolymer coating composition of the present invention is capable of coating thick and forming a coating film excellent in abrasion resistance, corrosion resistance and non-sticking property. Since the above-mentioned specific polyether type resin emulsion is used, the composition is excellent in view of workability, safety and environmental protection and is dispersed uniformly in a paint, and thus film forming effect is great and the article coated with the above-mentioned composition as a top coat assures that its qualities can be maintained for a long period of time.


CLAIMS

1 1. A fluoropolymer coating composition
2 comprising fine particles of a fluoropolymer; 0.1 to 300
3 % by weight of a polyether type resin on the basis of a
4 weight of said fine particles, which is represented by the
5 formula (I):



7 wherein R^1 is the same or different and each is hydrogen
8 or an alkyl having 1 to 20 carbon atoms, Y^1 is the same or
9 different and each is ether, ester, urethane or thionyl, A
10 is alkylene oxide residual group having at least 3 carbon
11 atoms (A molecular weight of an alkylene oxide moiety
12 obtained by polymerization is 1×10^3 to 1×10^4), B is
13 urethane, thionyl or phosphoric acid residual group (in
14 the parenthesis is represented a residual group obtained
15 through alternating copolymerization), and a temperature
16 where said resin is decomposed and vaporized is in the
17 range up to a decomposition temperature of said
18 fluoropolymer; and a liquid carrier.

1 2. The fluoropolymer coating composition of
2 Claim 1 containing 0.1 to 300 % by weight of a polyether
3 type high molecular surfactant on the basis of a weight of
4 said fine particles of the fluoropolymer, which is
5 represented by the formula (II):




7 wherein R is hydrogen or an alkyl having 1 to 20 carbon
8 atoms, Y is ether, ester, urethane, thionyl or phosphoric
9 acid residual group, C is ethylene oxide residual group, D
10 is propylene oxide residual group, a is an integer of 30
11 to 2,000, b is an integer of 20 to 500, c is an integer of
12 1 to 10 $(-C_a-D_b)_c$ represents a residual group obtained
13 through alternating copolymerization or random



14 copolymerization),
15 the formula (III):



17 wherein R, Y, C, D and b are the same as above, the sum of
18 a and d is an integer of 30 to 2,000,
19 the formula (IV):



21 wherein R, Y, C and D are the same as above, the sum of a
22 and d is an integer of 20 to 500, b is an integer of 30 to
23 2,000,
24 the formula (V):



26 wherein Z is a polyvalent aliphatic saturated hydrocarbon
27 residual group having 1 to 5 carbon atoms, R is hydrogen
28 or an alkyl having 1 to 20 carbon atoms, Y is ether,
29 ester, urethane, thionyl or phosphoric acid residual
30 group, C is ethylene oxide residual group, D is propylene
31 oxide residual group, a is an integer of 30 to 2,000, b is
32 an integer of 20 to 500, c is an integer of 1 to 10, e is
33 an integer of 1 to 4 ($-(Ca-Db)_c-$ represents a residual
34 group obtained through alternating copolymerization or
35 random copolymerization),
36 the formula (VI):



38 wherein Z, R, Y, C, D and b are the same as in the formula
39 (V), the sum of a and d is an integer of 30 to 2,000, e
40 is an integer of 1 to 4,
41 the formula (VII):



43 wherein Z, R, Y, C and D are the same as in the formula
44 (V), the sum of a and d is an integer of 20 to 500, b is
45 an integer of 30 to 2,000, e is an integer of 1 to 4,
46 or a mixture of at least two thereof.

1 3. The fluoropolymer coating composition of
2 Claim 1 or 2, wherein said fluoropolymer is a
3 tetrafluoroethylene polymer.

1 4. The fluoropolymer coating composition of
2 Claim 3, wherein the tetrafluoroethylene polymer is
3 polytetrafluoroethylene, tetrafluoroethylene-
4 perfluoro(alkyl vinyl ether) copolymer,
5 tetrafluoroethylene-hexafluoropropylene copolymer or at
6 least two thereof.

1 5. A fluoropolymer coating composition prepared
2 by adding, to the fluoropolymer coating composition of
3 any of Claims 1 to 4,
4 (1) mica particles, mica particles coated with pigment,
5 metal flakes or a mixture of at least two thereof, and the
6 fluoropolymer comprises
7 (2) polytetrafluoroethylene, tetrafluoroethylene-
8 perfluoro(alkyl vinyl ether) copolymer,
9 tetrafluoroethylene-hexafluoropropylene copolymer or a
10 mixture of at least two thereof, wherein an amount of the
11 component (2) is 80 to 99.8 % by weight and an amount of
12 the component (1) is 20 to 0.2 % by weight on the basis of
13 the sum of components (1) and (2).

1 6. The fluoropolymer coating composition of any
2 of Claims 1 to 5, wherein said liquid carrier is water.

1 7. A coated article which is obtained by
2 coating, as a top coat, the fluoropolymer coating
3 composition of any of Claims 1 to 6 so as to form at least
4 30 μ m thick molten coating film.

