

(51) International Patent Classification:  
*H04L 29/06* (2006.01) *G06F 21/00* (2006.01)(21) International Application Number:  
PCT/EP2008/055267(22) International Filing Date:  
29 April 2008 (29.04.2008)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): TELEFONAKTIEBOLAGET L M ERICSSON (PUBL) [SE/SE]; S-164 83 Stockholm (SE).

(71) Applicant and

(72) Inventor: STENFELT, John [SE/SE]; Gibraltargatan 58, S-412 58 Göteborg (SE).

(74) Agent: MOLKER, Anders; Ericsson AB, Patent Unit Antennas &amp; Microwaves, S-417 56 Göteborg (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,

HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

## Published:

- with international search report (Art. 21(3))

(54) Title: IMPROVED INTRUSION DETECTION AND NOTIFICATION

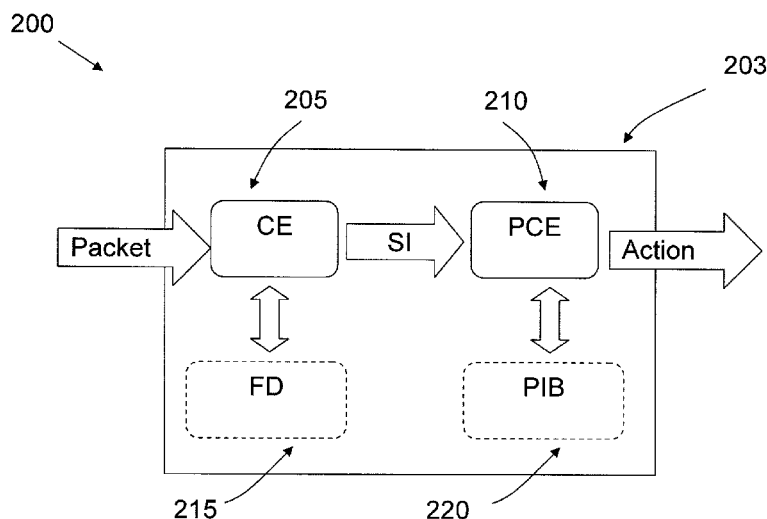


Fig 2

(57) Abstract: A device (200, 300, 400) for use in a cellular communications system (100), the device (200, 300, 400) being provided with means (205) for inspecting traffic packets to and from users in the system and for a first classification (SI) of said packets according to predetermined rules. The device (200, 300, 400) also comprises means (210, 220) for initiating a process for a user who is the destination or source of a packet which is classified in said first classification (SI) as belonging to a specific kind of traffic which has as one of its characteristics that the device (200) cannot redirect the packet from its intended destination to another destination. The process is such that at a later point in time, when the user attempts to access a webpage, the user is redirected to a predefined webpage.