


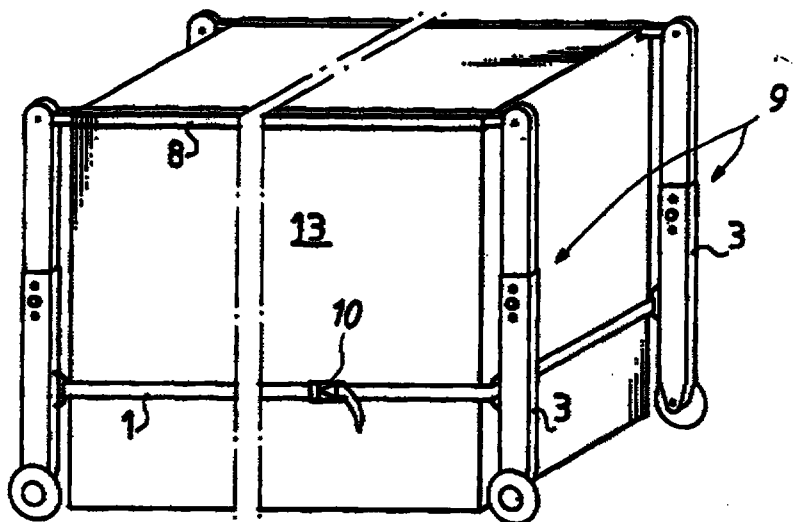

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B65D 90/18 // B65G 7/00	A1	(11) International Publication Number: WO 95/31387 (43) International Publication Date: 23 November 1995 (23.11.95)
(21) International Application Number: PCT/FI95/00243 (22) International Filing Date: 9 May 1995 (09.05.95) (30) Priority Data: 942298 17 May 1994 (17.05.94) FI (71) Applicant (for all designated States except US): PARMA OY [FI/FI]; Murrontie, FIN-30420 Forssa (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): KOSONEN, Jorma [FI/FI]; Järvitie 4, FIN-31300 Tammela (FI). HEINONEN, Matti [FI/FI]; Jussilankatu 3, FIN-30420 Forssa (FI). (74) Agents: LAINEN, Seppo et al.; Seppo Laine Oy, Lönnrotinkatu 19 A, FIN-00120 Helsinki (FI).	(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG , SI, SK, TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG). Published With international search report. 86 9612 009-2 RTMP's 10	

(54) Title: **METHOD AND ASSEMBLY FOR TRANSFERRING SPACE MODULES**

(57) Abstract

The present invention relates to a method and assembly for transferring ship cabin modules (13) and similar components in ships, offshore structures and buildings erected on land. According to the invention, four stands (3) with wheels (4) are attached to the space module (13) so that the distance between the attachment point and the lower edge of the module (13) is smaller than the maximum length of the stand (3) from the attachment point to the extreme lower point of the wheel (4). A tightening strap (1) is adapted to encompass the module (13) so that the strap passes via eyelets (5) made to the stands (3). When the strap (1) is tightened, the stands (3) move closer to the module (13) and the module (13) is elevated with the help of the stands (3) to the transfer position.