



- (51) International Patent Classification:
A61M 5/42 (2006.01) A61M 5/20 (2006.01)
- (21) International Application Number:
PCT/EP2014/062162
- (22) International Filing Date:
11 June 2014 (11.06.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1310393.2 11 June 2013 (11.06.2013) GB
- (71) Applicant: CILAG GMBH INTERNATIONAL
[CH/CH]; Landis + Gry-Strasse 1, CH-6300 Zug (CH).
- (72) Inventors: BITAR, Ahmad; 56 Great Eastern Street,
Cambridge Cambridgeshire CB1 3AD (GB). JENNINGS,
Douglas Ivan; 25 Parklands, Royston Hertfordshire SG8
9HL (GB).
- (74) Agents: BRUNNER, John Michael Owen et al.; Carp-
maels & Ransford LLP, One Southampton Row, London
WC1B 5HA (GB).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SLIDING SLEEVE ATTACHMENT FOR AN INJECTION DEVICE

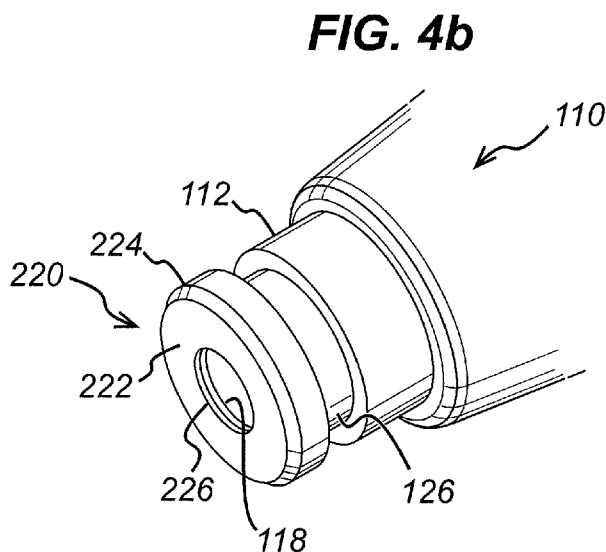

(57) Abstract: There is provided an injection device (110) comprising a housing (112) adapted to receive a syringe having a discharge nozzle, the syringe being moveable in the housing on actuation of the injection device along a longitudinal axis from a retracted position in which the discharge nozzle is contained within the housing and an extended position in which the discharge nozzle of the syringe extends from the housing through an exit aperture 118 at a distal end of the device, a sliding component (126) which extends, when in a first position, from the aperture, and is movable towards the housing into a second, retracted, position, wherein the sliding component comprises, at its distal end, a removable contact element (220).