



(51) International Patent Classification:
H02G 3/22 (2006.01) *F16L 5/00* (2006.01)

(21) International Application Number:
PCT/EP2010/051227

(22) International Filing Date:
2 February 2010 (02.02.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0950042-2 4 February 2009 (04.02.2009) SE

(71) Applicant (for all designated States except US): **ROX-TEC AB** [SE/SE]; P.O. Box 540, S-371 23 Karlskrona (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ANDERSSON, Jens** [SE/SE]; Enbärsvägen 7, S-370 23 Hasslö (SE). **ERICSON, Mats** [SE/SE]; Lysmaskvägen 7, S-374 51 Asarum (SE). **FILIPSEN, Jenny** [SE/SE]; Fortifikationsgatan 5, S-371 31 Karlskrona (SE). **HILDINGSSON, Ulf** [SE/SE]; Mjövikstrandsvägen 12, S-370 24 Nättraby (SE). **LUNDBORG, Christer** [SE/SE]; Bastionsgatan 6, S-371 32 Karlskrona (SE). **MILTON, Stefan** [SE/SE]; Torstävavägen 13, S-373 02 Ramdala (SE). **PETTERSSON, Ronnie** [SE/SE]; Rörläggarevägen 10, S-373 00

Jämjö (SE). **ÅKESSON, Jörgen** [SE/SE]; Öljersjövägen 25, S-371 94 Lyckeby (SE).

(74) Agent: **STRÖM & GULLIKSSON AB**; Box 4188, S-203 13 Malmö (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A PIPE OR CABLE LEAD-THROUGH HAVING LAYERS OF DIFFERENT THICKNESS

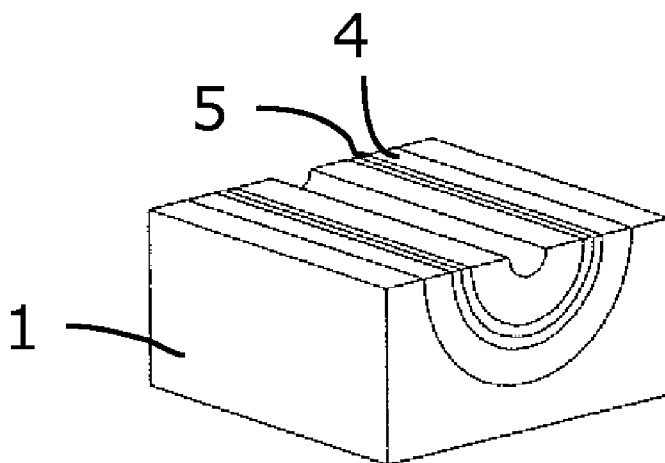


Fig. 2

(57) Abstract: A compressible seal or lead-through for cables, wires or pipes. The seal has two or more base parts (1, 8, 11) surrounding each cable, wire or pipe. Each compressible base part (1, 8, 11) has peelable sheets (3-7, 10, 12) for adapting to the diameter of a cable, wire or pipe. The sheets (3-7, 10, 12) placed in the base parts (1, 8, 11) have either different thicknesses or different rigidities.

**Published:****(88) Date of publication of the international search report:**

10 March 2011

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*