

METHOD OF FORMING FLUORESCENTSCREEN OF CATHODE RAY TUBE

BACKGROUND INVENTION

5

1. Field of the Invention

The present invention relates to a method of producing a cathode-ray tube, more particularly relates to a method of forming a fluorescent screen of a cathode ray tube in which improves a process of pouring covering water performed between a process of forming a phosphor layer by a precipitation process and a process of forming a lacquer intermediate film.

10

2. Description of the Related Art

15

A cathode ray tube (CRT) is provided with a glass bulb comprising a panel portion, a funnel portion, and a neck portion and is configured so that a phosphor layer formed on an inner surface of the panel portion is irradiated by electrons from an electron gun to cause the phosphor to emit light.

20

As this type of cathode ray tube, for example, a cathode ray tube for a projection television or a cathode ray tube for a monochrome television is produced in for example the following way.

25

First, the inner surface of the glass bulb on which

REPLACED SHEETS		SG
☒	Description : paged1... to paged13....	
☒	Claim(s) : paged14... to paged15....	
☐	Drawing(s) : paged to paged	
☒	Abstract : paged16... to paged	
DATE OF RECEIPT		

This Sheet Has Been Replaced



the phosphor layer is formed is washed by using pure water etc., then an aqueous electrolyte solution such as an aqueous solution of barium acetate is poured, then a suspension obtained by dispersing the phosphor in an aqueous solution of water glass is poured in as a binder and the assembly is allowed to stand for a predetermined time to cause the phosphor to precipitate. After the precipitation of the phosphor, the glass bulb is slowly moved and inclined (tilted) so as to form the phosphor layer.

Next, in order to form a continuous good aluminum vapor deposited film, the phosphor layer is moistened by pure water or the like, the majority of the phosphor layer is covered by a film of the water, then an organic solvent lacquer mainly composed of an acrylic resin is sprayed to form a very thin lacquer intermediate film on the film of water. The phosphor layer is not formed on the inner surface of the funnel portion and neck portion, so the lacquer intermediate film formed on the portion is removed by pouring pure water. This is because, when the lacquer intermediate film is formed in a region not coated with the phosphor layer, the aluminum vapor deposited film formed on this region swells by the subsequent baking step and peeling is caused from the funnel portion of the cathode ray tube.



Further, the phosphor layer is dried by using dehumidified air etc. and a carbon film is coated on the predetermined region and dried. Finally, the aluminum is vapor deposited to form the aluminum vapor deposited film, then the organic material used when forming the phosphor layer is heated to 400 to 440°C to decompose and remove it. The phosphor layer is formed after these steps.

In the above-mentioned method of producing a cathode ray tube, in the process of pouring the covering water carried out before forming the lacquer intermediate film after forming the phosphor layer, the water glass and barium acetate are dissolved in the covering water. If the amount of the water glass and barium acetate dissolved in the covering water is too small, however, the luminance deteriorates at the peripheral portions of the screen due to aging after fabrication of the CRT due to the influence of the water glass and barium acetate remaining in the phosphor layer. This disadvantage is conspicuous in a blue monochrome projection cathode ray tube and causes a disadvantage in that the peripheral portions become yellow when an RGB projection cathode ray tube is used and a white color is projected.

Conversely, when the amount of the water glass and barium acetate dissolved in the covering water is too large, a sufficient bonding force of the phosphor to the



glass surface cannot be obtained and it suffers from the disadvantage in that the phosphor drops off due to vibration during the fabrication of the CRT. After pouring in a cushion solution and suspension, the phosphor is precipitated by the reaction of the barium acetate in the cushion solution and the water glass in the suspension. When the amount of the water glass is insufficient or the amount of barium acetate becomes excessive or insufficient with respect to the water glass, the bonding force of the phosphor is lowered, and the phosphor will be flushed away at the time of the discharge of the water.

The dried phosphor is adhered to the panel glass by the water glass. For this reason, when the amount of the water glass is too small, the phosphor becomes apt to peel off due to the lowering of the bonding force with the panel glass. Conversely, if it is too large, burning occurs with aging after the fabrication of the CRT. This becomes a cause of the lowering of the luminance.

SUMMARY OF THE INVENTION

The present invention was made in consideration with such disadvantages and has as an object thereof to provide a method of producing a cathode ray tube which forms a phosphor layer having a good surface quality by properly managing the dissolution of the water glass and barium



acetate occurring in the covering water step and can improve the uniformity.

According to the present invention, there is provided a method of forming a fluorescent screen for a cathode ray tube having a glass bulb, comprising the steps of:

5 cleaning an inner surface of the glass bulb having a panel portion by using at least pure water; injecting an aqueous solution of electrolyte into the glass bulb; depositing a suspension of water glass and phosphor slurry on an inner

10 surface of the panel portion; drying the suspension to form a phosphor layer; coating a whole surface of the phosphor layer with pure water from 30 to 180 seconds; spraying a lacquer comprising an acrylic resin on the wetted phosphor layer to form a lacquer film layer;

15 forming a metal backing layer on the lacquer film layer; and heating the glass bulb to remove the lacquer film layer at a temperature at 400 °C to 420 °C.

Preferably, the cleaning process comprises the step of cleaning the inner surface of the glass bulb by using

20 an aqueous solution of fluorhydric acid before using the pure water, or the step of cleaning the inner surface of the glass bulb by using nitric acid before using the pure water.

Preferably, the aqueous solution of electrolyte

25 comprises an aqueous solution of barium acetate.



Preferably, the drying process is drying the suspension by using dehumidified air.

Preferably, the coating process includes the step of coating a whole surface of the phosphor layer with pure water for 40 to 150 seconds or the step of coating process includes the step of coating a hole surface of the phosphor layer with pure water for 80 to 120 seconds.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects and features of the present invention will be apparent the following description with reference to the accompanying drawings in which:

Fig. 1 is a sectional view of a cathode ray tube according to an embodiment of the present invention;

Fig. 2 is a flowchart of the method of producing a cathode ray tube according to an embodiment of the present invention;

Fig. 3 is a sectional view of a cathode ray tube showing a lacquer spraying step according to an embodiment of the present invention; and

Fig. 4 is a graph of the conductivity of covering water with respect to the time of moistening by the covering water.



DESCRIPTION OF THE PREFERRED EMBODIMENTS

Below, an explanation will be made of an embodiment of the present invention based on the drawings.

A cathode ray tube (CRT) to which the present
5 embodiment is applied is a CRT used in for example a
projection television or a monochrome television such as a
black and white television. As shown in Fig. 1, the CRT
has a glass bulb 10 comprising a panel portion 12, a
funnel portion 14, and a neck portion 16 and is configured
10 so that a phosphor layer 2 formed on the inner surface of
the panel portion 12 is irradiated by electrons from an
electron gun (not illustrated) to cause the phosphor
included in the phosphor layer 2 to emit light.

On the inner surface of the panel portion 12, the
15 phosphor layer 2 containing the phosphor is formed. A
lacquer intermediate film 4 is formed on the front surface
of this phosphor layer 2. The lacquer intermediate film 4
is constituted by a organic solvent lacquer comprised
mainly of an acrylic resin which is dissolved into organic
20 solvent such as toluene. By interposing a very thin
lacquer intermediate film 4 between the phosphor layer 2
and an aluminum vapor deposited film 6, a continuous, good
aluminum vapor deposited film 6 can be obtained. This
lacquer intermediate film 4 is formed up to a connection
25 portion 18 of the panel portion 12 and the funnel portion



14 so as to cover at least the phosphor layer 2.

On a predetermined region of the inner surface of the funnel portion 14, a carbon film 8 for conduction is formed. Further, on the inner surface of the panel portion 12 and the funnel portion 14, an aluminum vapor deposited film 6 is formed for the purpose of prevention of ion burning of the phosphor due to the electron beam, of increase of the light emission efficiency, etc.

An explanation will be made of the method of producing a cathode ray tube according to the present embodiment referring to Fig. 2.

The inner surface of the glass bulb 10 forming the phosphor layer 2 is washed (cleaned) by using an aqueous solution of hydrofluoric acid, an aqueous solution of nitric acid, and pure water. Subsequently, the panel portion 12 of the glass bulb 10 is turned downward, and a predetermined amount of an aqueous electrolyte solution such as an aqueous solution of barium acetate is poured (injected) into the glass bulb 10. Thereafter, a suspension obtained by dispersing a predetermined phosphor is poured (injected) into an aqueous solution of water glass serving as a binder and the assembly is allowed to stand for a predetermined time to cause the phosphor to precipitate (step 1: S1). After the precipitation of the phosphor, the glass bulb is slowly moved and inclined, to



thereby form the phosphor layer 2. In this case, the drying of the phosphor layer 2 is carried out by vacuum drying etc (step 2:S2).

Subsequently, so as to form a continuous, good
5 aluminum vapor deposited film 6, first the phosphor layer 2 is moistened by pure water (covering water) etc. and the whole surface of the phosphor layer 2 is covered by a film of water (step 3:S3). The agent (liquid) for preventing
10 adhesion of the lacquer on the inner surface of the funnel 14, is coated below the connection portion 18 of the panel 12 and the funnel 14 and on the neck 16 (step 4:S4). At this time, the barium acetate and the water glass contained in the phosphor layer 2 are dissolved in the pure water, so the electric conductivity in the covering
15 water is increased along with an increase of the time of moistening by the pure water as shown in Fig. 4. In the present embodiment, by managing the conductivity in the covering water in this covering water pouring process, the production of the best cathode ray tube is made possible.
20 Namely, according to a study by the present inventors, the best cathode ray tube can be obtained when the conductivity of the electrolyte remaining in the phosphor layer after the covering water pouring process (injection process) is $6.0 \pm 4.0 \mu\text{S/cm}$ in 200 ml of pure water of
25 $20^\circ\text{C} \pm 1^\circ\text{C}$. Accordingly, the moistening time was set so that



the conductivity of the electrolyte remaining in the phosphor layer in the covering water pouring process satisfied the above conductivity range. Specifically, as shown in Fig. 4, the covering water pouring process was
5 carried out by pure water for 30 to 180 seconds.

The panel portion 12 of the glass bulb 10 is turned upward as shown in Fig. 3 and an organic solvent lacquer mainly composed of an acrylic resin is sprayed to the inner surface of the panel portion 12 and the funnel
10 portion 14 by using a nozzle 20 (step 5:S5) so as to form a very thin lacquer intermediate film 4 on the film of water.

Since if the lacquer intermediate film 4 were formed on a region on which the phosphor layer 2 was not coated,
15 the aluminum vapor deposited film 6 deposited on this region by vapor deposition would blister in the baking process after this and peel from the funnel portion 14 of the cathode ray tube, as indicated by two dot chain line in Fig. 1, the lacquer intermediate film 4 from the funnel
20 portion 14 to the neck portion 16 on which the phosphor layer 2 is not formed is removed by spraying pure water (trimming step 6:S6).

The phosphor layer 2 is dried by using dehumidified air etc. (step 7:S7), then carbon for conduction is coated
25 on a predetermined region of the inner surface of the



glass bulb 10 and dried to form the carbon film 8 (step 8:S8)

The aluminum is vapor deposited on the phosphor layer 2 to form the aluminum vapor deposited film 6, then the organic material used when forming the phosphor layer 2 is heated to 400 to 420°C to decompose and remove it (step 9:S9).

Finally, the inspection of the formed fluorescent screen of the CRT is carried out.

As mentioned above, in the present invention, a phosphor layer is formed on an inner surface of a panel portion of a glass bulb by a precipitation process and a lacquer intermediate film is formed on the phosphor layer in a state where the phosphor layer is moistened by covering water, characterized in that after the phosphor layer is moistened by the covering water, an electrolyte remaining in the phosphor layer has a conductivity of $6.0 \pm 4.0 \mu\text{S}/\text{cm}$ in 200 ml of pure water of $20^\circ\text{C} \pm 1^\circ\text{C}$. The phosphor layer is preferably moistened by the covering water for 30 to 180 seconds.

In the method of producing a cathode ray tube of the present invention, first a phosphor layer is formed on the inner surface of the panel portion of the glass bulb by a precipitation process and a lacquer intermediate film is formed on the phosphor layer in a state where the phosphor



layer is moistened by covering water. At the moistening of the phosphor layer formed on the inner surface of this panel portion by covering water such as pure water, in the method of producing a cathode ray tube of the present invention, the electrolyte remaining in the phosphor layer after moistening the phosphor layer by the covering water is given a conductivity of $6.0 \pm 4.0 \mu\text{S}/\text{cm}$ in 200 ml of pure water of $20^\circ\text{C} \pm 1^\circ\text{C}$. Namely, the amount of the electrolyte dissolved in the covering water is maintained in a proper range. As a result, the deterioration of the luminance of the peripheral portions of the screen after the fabrication of the CRT due to the shortage of the amount of dissolution of the electrolyte, in other words, the residual presence of a large amount of the electrolyte in the phosphor layer, can be prevented. Also, the detachment of the phosphor due to an excessive amount of dissolution of the electrolyte, in other words, a shortage of the electrolyte remaining in the phosphor layer, can be prevented.

Particularly the amount of the electrolyte contained in the phosphor layer dissolved in the covering water is correlated with the time of moistening with the covering water, therefore when the change of the conductivity of the electrolyte remaining in the phosphor layer with respect to the time of moistening by the covering water is



preliminarily measured and the conductivity is managed by
a moistening time (for example 30 to 180 seconds)
satisfying the conductivity of $6.0 \pm 4.0 \mu\text{S}/\text{cm}$ with which
the screen quality becomes the best, the management of
5 production of the cathode ray tube becomes easier.

In the cathode ray tube produced after passing the
above steps, the luminance was improved by about 10
percent compared with a conventional cathode ray tube.

Note that, the present invention is not limited to
10 the above embodiment and includes various modifications
within the scope of the present invention.

This Sheet Has Been Replaced





What is claimed is:

1. A method of forming a fluorescent screen for a cathode ray tube having a glass bulb, comprising the steps of:

5 cleaning an inner surface of the glass bulb
having a panel portion by using at least pure water;
 injecting an aqueous solution of electrolyte
into the glass bulb;
 depositing a suspension of water glass and
10 phosphor slurry on an inner surface of the panel portion;
 drying the suspension to form a phosphor layer;
 coating a whole surface of the phosphor layer
with pure water from 30 to 180 seconds;
 spraying a lacquer comprising an acrylic resin
15 on the wetted phosphor layer to form a lacquer film layer;
 forming a metal backing layer on the lacquer
film layer; and
 heating the glass bulb to remove the lacquer
film layer at a temperature at 400 °C to 420 °C.

20 2. A method of forming a fluorescent screen for a
cathode ray tube according to claim 1, wherein said
cleaning process comprises the step of cleaning the inner
surface of the glass bulb by using an aqueous solution of
fluorhydric acid before using the pure water.

25 3. A method of forming a fluorescent screen for a





cathode ray tube according to claim 1, wherein said cleaning process comprises the step of cleaning the inner surface of the glass bulb by using nitric acid before using the pure water.

5 4. A method of forming a fluorescent screen for a cathode ray tube according to claim 1, wherein said aqueous solution of electrolyte comprises an aqueous solution of barium acetate.

10 5. A method of forming a fluorescent screen for a cathode ray tube according to claim 1, wherein said drying process is drying the suspension by using dehumidified air.

15 6. A method of forming a fluorescent screen for a cathode ray tube according to claim 1, wherein said coating process includes the step of coating a whole surface of the phosphor layer with pure water for 40 to 150 seconds.

20 7. A method of forming a fluorescent screen for a cathode ray tube according to claim 1, wherein said coating process includes the step of coating a hole surface of the phosphor layer with pure water for 80 to 120 seconds.



METHOD OF FORMING FLUORESCENTSCREEN OF CATHODE RAY TUBEABSTRACT OF THE DISCLOSURE

5

A method of forming a phosphor layer of a fluorescent screen of a CRT, having a good screen quality by properly managing the dissolution of a water glass and barium acetate occurring in a covering water step and improve the uniformity. A phosphor layer is formed on an inner surface of a panel portion of a glass bulb by a precipitation process and a lacquer intermediate film is formed on the phosphor layer in a state where the phosphor layer is moistened by covering water. An electrolyte remaining in the phosphor layer after the phosphor layer is moistened by the covering water has a conductivity of $6.0 \pm 4.0 \mu\text{S}/\text{cm}$ in 200 ml of pure water of $20^\circ\text{C} \pm 1^\circ\text{C}$.


10.

15

Figure 2



FIG. 1

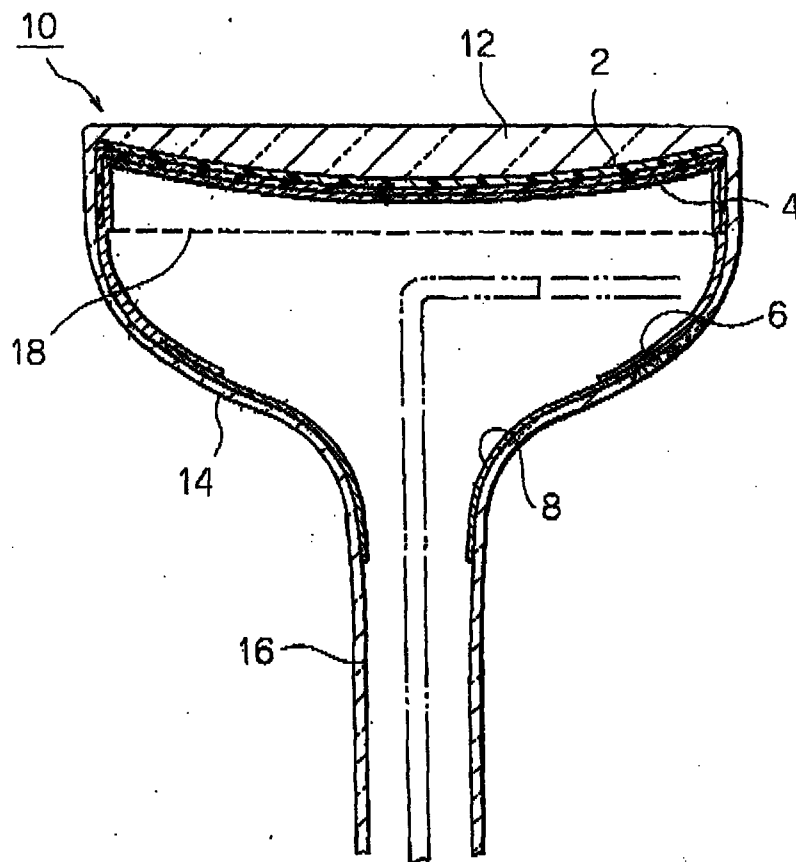

This Sheet Has Been Replaced





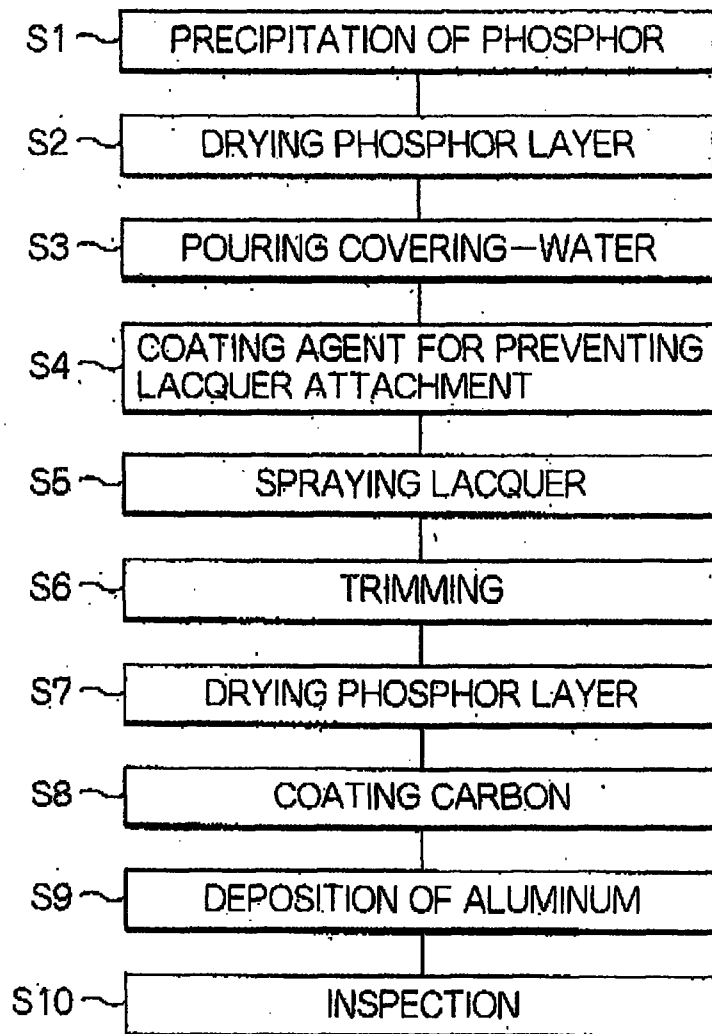
FIG. 2

FIG. 3**FIG. 4**

This Sheet Has Been Replaced

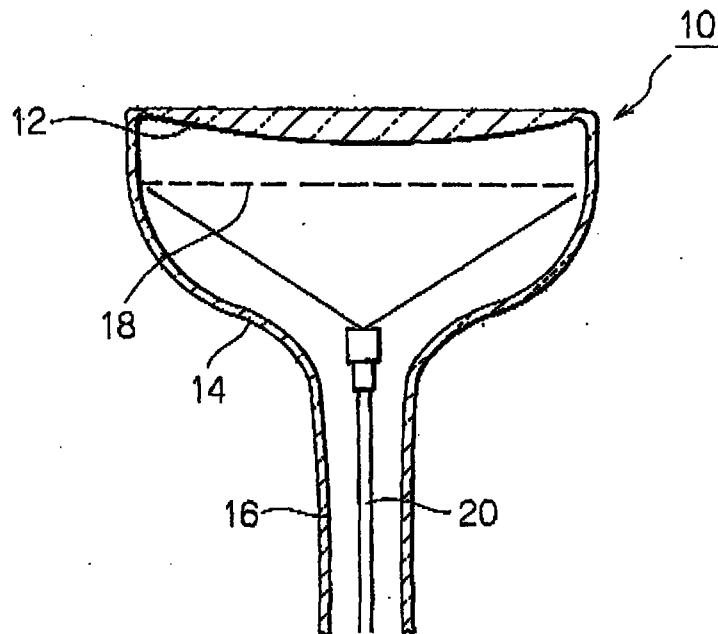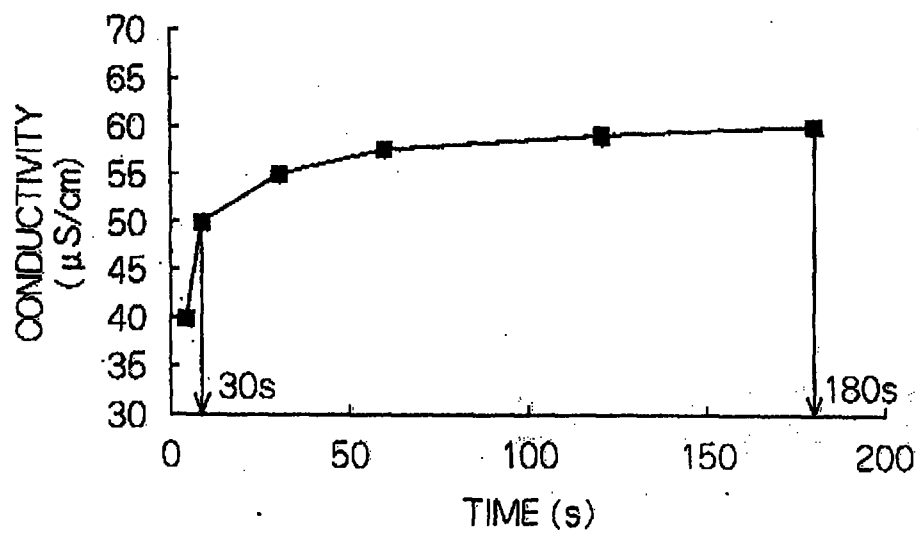

METHOD OF FORMING FLUORESCENT
SCREEN OF CATHODE RAY TUBE


The present invention relates to a method of producing a cathode-ray tube, more particularly relating to a method of forming a fluorescent screen of cathode ray tube.

A cathode ray tube (CRT) is provided with a glass bulb comprising a panel portion, funnel portion, and a neck portion and is configured so that a phosphor layer formed on an inner surface of the panel portion is irradiated by electrons from an electron gun to cause the phosphor to emit light.

This type of cathode ray tube, for example a cathode ray tube for a projection television or a cathode ray tube for a monochrome television, is produced in, for example, the following way.

First, the inner surface of the glass bulb on which the phosphor layer is formed is washed by using at least pure water etc., then an aqueous electrolyte solution such as an aqueous solution of barium acetate is poured over the interior of the panel portion, then a suspension obtained by dispersing the phosphor in an aqueous solution of water glass as a binder is poured in and the assembly is allowed to stand for a predetermined time to cause the phosphor to precipitate, the glass bulb then being slowly moved and inclined (tilted) so as to form the phosphor layer.

Next, in order to form a continuous good aluminum vapor deposited film, the phosphor layer is moistened by pure water or the like, most the phosphor layer being covered by a film of the water. Then an organic solvent lacquer mainly composed of an acrylic resin is sprayed to form a very thin lacquer intermediate film on the film of water. The phosphor layer is not formed on the inner surface of the funnel portion and neck portion, so the lacquer intermediate film formed on

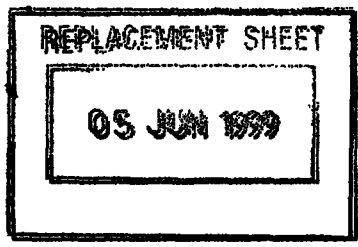


REPLACEMENT SHEETS		SG
☒	Description :	paged ..1.. to paged ..1..
☒	Claim(s) :	paged ..10.. to paged ..12..
☐	Drawing(s) :	paged to paged
☒	Abstract :	paged ..1.. to paged
DATE OF RECEIPT5/6/99.....		

these portions is removed by pouring pure water thereover. This is done because, when the lacquer intermediate film is formed in a region not coated with the phosphor layer, the aluminum vapor deposited film
5 formed on this region swells in the subsequent baking step and peeling from the funnel portion of the cathode ray tube takes place.

Further, the phosphor layer is dried by using dehumidified air etc. and a carbon film is coated on
10 the predetermined region and dried.. Finally, the aluminum is vapor deposited to form the aluminum vapor deposited film, then the organic material used when forming the phosphor layer is heated to 400 to 440°C to decompose and remove it. The phosphor layer is ready
15 after these steps.

In the abovementioned method of producing a cathode ray tube, in the process of pouring the covering water carried out before forming the lacquer intermediate film after forming the phosphor layer, the
20 water glass and barium acetate are dissolved in the covering water. If, however, the amounts of water glass and barium acetate which are dissolved in the covering water are too small, however, the luminescence at the peripheral portions of the screen deteriorates
25 due to aging after fabrication of the CRT as a result of the influence of the water glass and barium acetate remaining in the phosphor layer. This disadvantage is conspicuous in a blue monochrome projection cathode ray tube and causes a disadvantage in that the peripheral
30 portions become yellow when an RGB projection cathode ray tube is used and a white color is projected.

Conversely, when the amount of the water glass and barium acetate dissolved in the covering water is too large, insufficient bonding of the phosphor to the
35 glass surface is obtained and there is the problem that the phosphor no longer adheres due to vibration during



the fabrication of the CRT. More particularly, after pouring in a cushion solution containing the barium acetate and the phosphor suspension, the phosphor is precipitated by the reaction of the barium acetate in the cushion and the water glass in the suspension. When the amount of water glass is insufficient or the amount of barium acetate becomes excessive or insufficient with respect to the water glass, the bonding strength of the phosphor is lowered, and the phosphor will be flushed away at the time of the discharge of the water.

The dried phosphor is adhered to the panel glass by the water glass. For this reason, when the amount of the water glass is too small, the phosphor becomes apt to peel off due to the lowering of the binding force with the panel glass. Conversely, if it is too large, burning occurs with aging after the fabrication of the CRT. This becomes a cause of the lowering of the luminescence.

The present invention was arrived at as a result of such disadvantages and had as an object thereof to provide a method of producing a cathode ray tube in which a phosphor layer having good surface quality is produced. For this purpose it has been found necessary to manage properly the dissolution of the water glass and barium acetate in the covering water step to improve the uniformity of the phosphor layer.

According to the present invention, there is provided a method of forming a fluorescent screen for a cathode ray tube having a glass bulb, comprising the steps of:

cleaning an inner surface of the glass bulb having a panel portion by using at least pure water;

injecting an aqueous electrolyte solution into the glass bulb;

REPLACEMENT SHEET

05 JUN 1999

depositing a suspension of water glass and phosphor slurry on the inner surface of the panel portion;

5 drying the suspension to form a phosphor layer;

covering the entire surface of the phosphor layer with pure water for from 30 to 180 seconds;

10 spraying a lacquer comprising an acrylic resin on the wetted phosphor layer to form a lacquer film layer;

forming a metal backing layer on the lacquer film layer;

15 and heating the glass bulb to remove the lacquer film layer at a temperature at 400°C to 420°C.

Preferably, the cleaning process comprises a step of cleaning the inner surface of the glass bulb by using an aqueous solution of hydrofluoric acid before using the pure water, or a step of cleaning the inner surface of the glass bulb by using nitric acid before using the pure water.

Preferably, the aqueous electrolyte solution comprises an aqueous solution of barium acetate.

25 Preferably, the drying of the suspension is carried out by using dehumidified air.

Preferably, the step of coating the whole surface of the phosphor layer with pure water is carried out for 40 to 150 seconds, more preferably 80-120 seconds.

30 For a better understanding of the invention, and to show how the same may be carried into effect, reference will now be made, by way of example, to the accompanying drawings, in which:-

Fig. 1 is a sectional view of a cathode ray tube produced by the method of the present invention;

35 Fig. 2 is a flowchart of the method of

REPLACEMENT SHEET

05 JUN 1999

producing a cathode ray tube according to the present invention;

Fig. 3 is a sectional view of a cathode ray tube showing a lacquer spraying step being carried out in the method of the present invention; and


Fig. 4 is a graph of the conductivity of covering water with respect to the time of wetting with the covering water.

A method embodying the present invention will be described with reference to the drawings.

A cathode ray tube (CRT) to which the present method embodying the invention is applied is a CRT used in for example a projection television or a monochrome television such as a black and white television. As shown in Fig. 1, the CRT has a glass bulb 10 comprising a panel portion 12, a funnel portion 14, and a neck portion 16 and is configured so that a phosphor layer 2 formed on the inner surface of the panel portion 12 is irradiated by electrons from an electron gun (not illustrated) to cause the phosphor included in the phosphor layer 2 to emit light.

A lacquer intermediate film 4 is formed on the front surface of this phosphor layer 2 formed on the inner surface of the panel portion 12. The lacquer intermediate film 4 is constituted by an organic solvent lacquer comprised mainly of an acrylic resin which is dissolved in organic solvent such as toluene. By interposing a very thin lacquer intermediate film 4 between the phosphor layer 2 and an aluminum vapor deposited film 6 can be obtained. This lacquer intermediate film 4 is formed beyond the panel portion 12 up to a connection portion 18 of the panel portion 12 and the funnel portion 14 in addition to covering the phosphor layer 2.

A carbon film 8 for conduction is formed over a predetermined region of the inner surface of the funnel

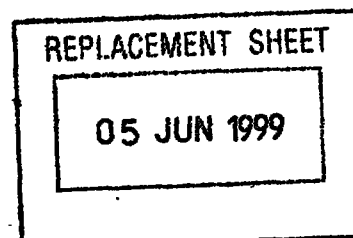


portion 14. The aluminum vapor deposited film 6 is formed, further, on the inner surface of the panel portion 12 and the funnel portion 14, for preventing ion burning of the phosphor due to the electron beam, to increase the light emission efficiency, etc.

A method embodying the invention for producing a cathode ray tube will now be described referring to Fig. 2.

The inner surface of the glass bulb 10 forming the phosphor layer 2 is washed (cleaned) by using an aqueous solution of hydrofluoric acid, an aqueous solution of nitric acid, and pure water. Subsequently, the panel portion 12 of the glass bulb 10 is turned downward, and a predetermined amount of an aqueous electrolyte solution such as an aqueous solution of barium acetate is poured (injected) into the glass bulb 10. Thereafter, a suspension of a predetermined phosphor in an aqueous solution of water glass serving as a binder is poured (injected) into the glass bulb 10 and the assembly is allowed to stand for a predetermined time to cause the phosphor to precipitate (step 1: S1). After the precipitation of the phosphor, the glass bulb is slowly moved and inclined thereby to form the phosphor layer 2. Drying of the phosphor layer 2 is then carried out by, for example, vacuum drying (step 2: S2).

Subsequently, so as to form a continuous, good aluminum vapor deposited film 6, first the phosphor layer 2 is moistened by pure water (covering water) etc. and the whole surface of the phosphor layer 2 is covered by a film of water (step 3: S3). An agent (liquid) for preventing adhesion of the lacquer to the inner surface of the funnel 14, is coated below the connection portion 18 of the panel 12 and the funnel 14 and on the neck 16 (step 4: S4). At this time, the barium acetate and the water glass contained in the

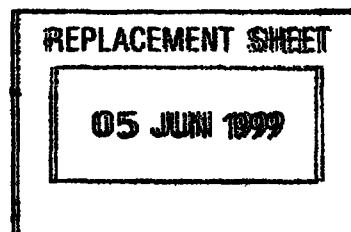

phosphor layer 2 are dissolved in the pure water, so that the electric conductivity in the covering water is increased as the time of moistening by the pure water increases, as shown in Fig. 4. In this procedure, by
5 managing the conductivity in the covering water the production of the best cathode ray tube is made possible. According to a study by the present inventors, the best cathode ray tube can be obtained when the conductivity of the electrolyte remaining in
10 the phosphor layer after pouring in of the covering water pouring process (injection process) is $6.0 \pm 4.0 \mu\text{s/cm}$ in 200 ml of pure water of $20^\circ\text{C} \pm 1^\circ\text{C}$. Accordingly, the moistening time is set so that the conductivity of the electrolyte remaining in the
15 phosphor layer in the covering water pouring process satisfies the above conductivity range. This happens when covering of the phosphor layer with water lasts for 30 to 180 seconds.

The panel portion 12 of the glass bulb 10 is
20 turned upwards as shown in Fig. 3 and an organic solvent lacquer mainly composed of an acrylic resin is sprayed to the inner surface of the panel portion 12 and the funnel portion 14 by using a nozzle 20 (step 5:S5) so as to form a very thin lacquer intermediate
25 film 4 on the adhering film of water.

If the lacquer intermediate film 4 were to form on a region on which the phosphor layer 2 was absent, the aluminum vapor deposited film 6 deposited on this region by vapor deposition would blister in the
30 subsequent baking process and peel from the funnel portion 14 of the cathode ray tube to occupy the position shown by two dot chain lines in Fig. 1. Hence, the lacquer intermediate film 4 is removed from the funnel portion 14 to the neck portion 16 on which
35 the phosphor layer 2 is not formed by spraying with pure water (trimming step 6:S6).

REPLACEMENT SHEET

05 JUN 1999

5 The phosphor layer 2 is dried by using
dehumidified air etc. (step 7:S7), then carbon for
conduction is coated on a predetermined region of the
inner surface of the glass bulb 10 and dried to form
the carbon film 8 (step 8:S8).


10 The aluminum is vapor deposited on the phosphor
layer 2 to form the aluminum vapor deposited film 6,
then the organic material used when forming the
phosphor layer 2 is heated to 400 to 420°C to decompose
and remove it (step 9:S9).

Finally, inspection of the formed fluorescent
screen of the CRT is carried out.

15 As mentioned above, in the present invention, a
phosphor layer is formed on an inner surface of a panel
portion of a glass bulb by a precipitation process and
a lacquer intermediate film is formed on the phosphor
layer while the phosphor layer is wetted by covering
water, so that, in practice, the phosphor layer is
moistened by the covering water, electrolyte remaining
20 in the phosphor layer having a conductivity of 6.0 ± 4.0
 $\mu\text{S}/\text{cm}$ in 200 ml of pure water of $20^\circ\text{C} \pm 1^\circ$ as a result of
the wetting. For this purposes, the phosphor layer is
moistened by the covering water for 30 to 180 seconds.


25 As a result of control of the conductivity of the
wetting water in the method of this invention, the
deterioration of the luminescence at the peripheral
portions of the screen after the fabrication of the
CRT, as a result of inadequate dissolution of the
electrolyte, in other words, the residual presence of a
30 large amount of electrolyte in the phosphor layer, can
be prevented. Also, the detachment of the phosphor due
to an excessive dissolution of the electrolyte, in
other words, a shortage of electrolyte remaining in the
phosphor layer, can be prevented.

35 In particular, the amount of the electrolyte
contained in the phosphor layer which is dissolved in



the covering is water related to the time of wetting
with the covering water. Therefore when there is a
change in the conductivity of the electrolyte remaining
in the phosphor layer with respect to the time of
5 wetting by the covering water, this being preliminary
measured, the change in conductivity is then
compensated for by varying the moistening time in the
range of 30 to 180 seconds to satisfy the general
conductivity requirements set out above, preferably to
10 have it be $6.0 \pm 4.0 \mu\text{s/cm}$ when the screen quality
becomes the best. This easy experimentation readily
simplified the production of the cathode ray tube,

A cathode ray tube produced by following the above
steps can have its luminescence improved by about 10
15 percent compared with a conventional cathode ray tube.

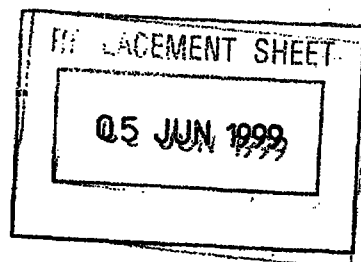




-10-

CLAIMS

1. A method of forming a fluorescent screen for a cathode ray tube having a glass tube, comprising the steps of:
- 5 cleaning an inner surface of the glass bulb having a panel portion by using at least pure water;
- 10 injecting an aqueous electrolyte solution into the glass bulb;
- depositing a suspension of water glass and phosphor slurry on the inner surface of the panel portion;
- 15 drying the suspension to form a phosphor layer;
- covering the surface of the phosphor layer with pure water for from 30 to 180 seconds;
- spraying a lacquer comprising an acrylic resin on the wetted phosphor layer to form a lacquer film layer;
- 20 forming a metal backing layer on the lacquer film layer; and
- heating the glass bulb to remove the lacquer film layer at a temperature at 400°C to 420°C.
- 25
2. A method of forming a fluorescent screen for a cathode ray tube according to claim 1, wherein said cleaning process comprises the step of cleaning the inner surface of the glass bulb by using an aqueous solution of hydrofluoric acid before using the pure water.
- 30
3. A method of forming a fluorescent screen for a cathode ray tube according to claim 1, wherein said cleaning process comprises the step of cleaning the inner surface of the glass bulb by using nitric acid
- 35

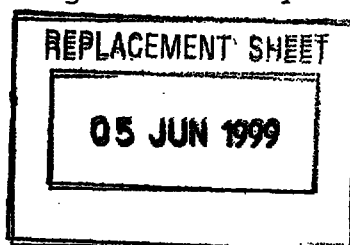



-11-

before using the pure water.

4. A method of forming a fluorescent screen for a cathode ray tube according to claim 1, 2 or 3, wherein
5 said aqueous solution of electrolyte is an aqueous solution of barium acetate.

5. A method of forming a fluorescent screen for a cathode ray tube according to any preceding claim,
10 wherein dehumidified air is used in carrying out drying of the suspension.

6. A method of forming a fluorescent screen for a cathode ray tube according to any preceding claim,
15 wherein the said coating step involves coating the whole surface of the phosphor layer with pure water for 40 to 150 seconds.

7. A method of forming a fluorescent screen for a cathode ray tube according to claim 1, wherein said
20 coating step involves coating the whole surface of the phosphor layer with pure water for 80 to 120 seconds.


8. A method of forming a fluorescent screen for a cathode ray tube having a glass tube, comprising the
25 steps of:

cleaning an inner surface of the glass bulb having a panel portion by using at least pure water;

30 injecting an aqueous electrolyte solution into the glass bulb;

depositing a suspension of water glass and phosphor slurry on the inner surface of the panel portion;

35 drying the suspension to form a phosphor layer;

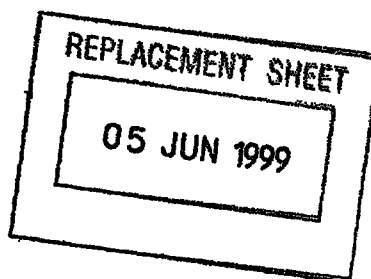



-12-

covering the whole surface of the phosphor layer with pure water for a sufficient time to achieve an electrolyte conductivity in the phosphor layer of $6.0 \pm 4.0 \mu\text{S}/\text{cm}$ in 200 ml of pure water or $20^\circ\text{C} \pm 1^\circ$;


5

spraying a lacquer comprising an acrylic resin on the wetted phosphor layer to form a lacquer film layer;

10

forming a metal backing layer on the lacquer film layer; and

heating the glass bulb to remove the lacquer film layer at a temperature at 400°C to 420°C .

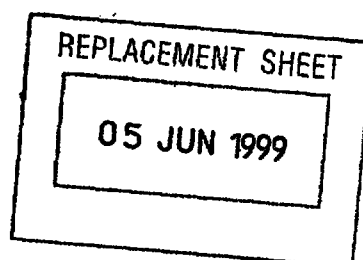

METHOD OF FORMING FLUORESCENTSCREEN OF CATHODE RAY TUBEABSTRACT OF THE DISCLOSURE

5

A method of forming a phosphor layer of a fluorescent screen of a CRT, having a good screen quality by properly managing the dissolution of a water glass and barium acetate occurring in a covering water step and improve the uniformity. A phosphor layer is formed on an inner surface of a panel portion of a glass bulb by a precipitation process and a lacquer intermediate film is formed on the phosphor layer in a state where the phosphor layer is moistened by covering water. An electrolyte remaining in the phosphor layer after the phosphor layer is moistened by the covering water has a conductivity of $6.0 \pm 4.0 \mu\text{S}/\text{cm}$ in 200 ml of pure water of $20^\circ\text{C} \pm 1^\circ\text{C}$.

REPLACEMENT SHEET

05 JUN 1999