



**(43) International Publication Date**  
**12 February 2004 (12.02.2004)**

## PCT

**(10) International Publication Number**  
**WO 2004/013420 A1**

**(51) International Patent Classification<sup>7</sup>: E03D 11/13**

**(21) International Application Number:** PCT/KR2003/001519

**(22) International Filing Date:** 30 July 2003 (30.07.2003)

(25) Filing Language: Korean

(26) **Publication Language:** English

**(30) Priority Data:**  
10-2002-0045750      2 August 2002 (02.08.2002)      KR

**(71) Applicant and**

(72) **Inventor:** LEE, Han-Gyu [KR/KR]; 28-1 Namseong-Li, Gangjin-Eup, Gangjin-Gun, Jeollanam-Do 527-802 (KR).

(74) **Agent: CHOI, Ik-Ha**; 2nd Floor, Seohan Bldg., 943-2 Dogok-Dong, Gangnam-Gu, Seoul 135-270 (KR).

**(81) Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


**(84) Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: FRAME FOR TOILET BOWL

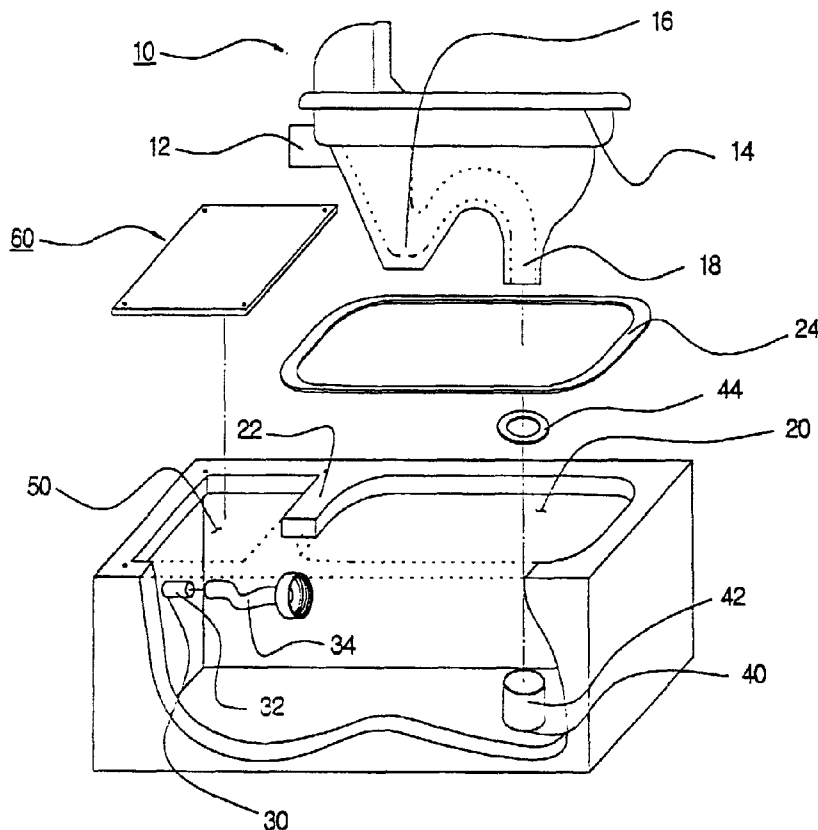

**(57) Abstract:** A frame for a toilet bowl. The frame has a height greater than that of the toilet bowl and possesses a box-shaped configuration or other various configurations. The frame is formed, on an upper wall thereof, with a toilet bowl seating part which is defined with a first opening of a size capable of allowing at least three sides of a flange portion on an outer surface of the toilet bowl to be seated on the toilet bowl seating part. A water pipe connection port is provided through one end wall of the frame so that a water pipe is connected to the water pipe connection port. A soil pipe connection port is formed through a bottom wall of the frame so that a soil pipe is connected to the soil pipe connection port to be communicated with a soil outlet of the toilet bowl.