(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
25 January 2001 (25.01.2001)

PCT

(10) International Publication Number
WO 01/06789 A1

(51) International Patent Classification[7]: H04N 7/18

(21) International Application Number: PCT/JP00/04808

(22) International Filing Date: 18 July 2000 (18.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/204109 19 July 1999 (19.07.1999) JP

(71) Applicant *(for all designated States except US)*: MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006, Oaza-Kadoma, Kadoma-shi, Osaka 571-8501 (JP).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: KIRINO, Hideki [JP/JP]; 6-69-13, Hama, Utazu-cho, Ayauta-gun, Kagawa 769-0206 (JP).


(74) Agent: HAYASE, Kenichi; Hayase & Co. Patent Attorneys, 8F, Esaka ANA Bldg., 17-1, Enoki-cho, Suita-shi, Osaka 564-0053 (JP).

(81) Designated States *(national)*: CN, ID, KR, SG, US.

Published:
— *With international search report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MONITORING DEVICE

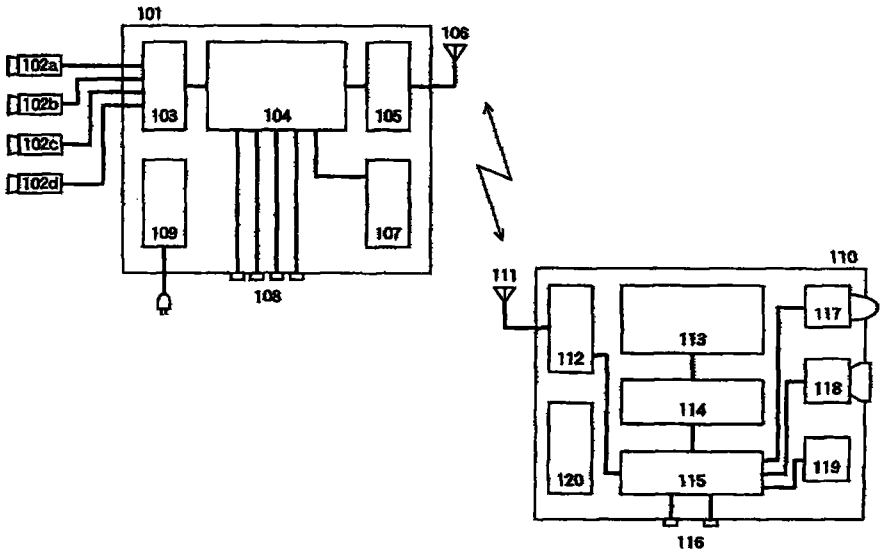

(57) Abstract: The monitoring device according to the present invention is a monitoring device A which comprises a master machine (101) comprising plural cameras (102), a camera interface circuit (103), a master machine control unit (104), a master machine radio transmitter (105), a master machine antenna (106), a recording unit (107), master machine operation buttons (108) and a power circuit (109), and a slave machine (110) comprising a slave machine antenna (111), a slave machine radio transmitter (112), a monitor unit (113), a monitor interface circuit (114), a slave machine control unit (115), a slave machine operation buttons (116), a lamp (117), a buzzer (118), a vibrator (119) and a battery (120), as shown in the figure. According to the so-constructed monitoring device, in a small-scale store such as a convenience store managed by a few clerks, the clerk can always grasp the circumstances in the store easily wherever the clerk is.

WO 01/06789 A1