




- (51) **International Patent Classification:**
B60R 22/195 (2006.01) *B60N 2/427* (2006.01)
- (21) **International Application Number:**
PCT/SE2012/050969
- (22) **International Filing Date:**
13 September 2012 (13.09.2012)
- (25) **Filing Language:** Swedish
- (26) **Publication Language:** English
- (30) **Priority Data:**
1150841-3 16 September 2011 (16.09.2011) SE
- (71) **Applicant (for all designated States except US):** BAE SYSTEMS HÄGGLUNDS AKTIEBOLAG [SE/SE]; S-891 82 Örnsköldsvik (SE).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** CARLSSON, Martin [SE/SE]; Sockenvägen 5, S-891 55 Arnäsfall (SE).
- (74) **Agent:** ALBIHNS.ZACCO AB; P.O. Box 5581, Valhallavägen 117, S-114 85 Stockholm (SE).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** VEHICLE SEAT

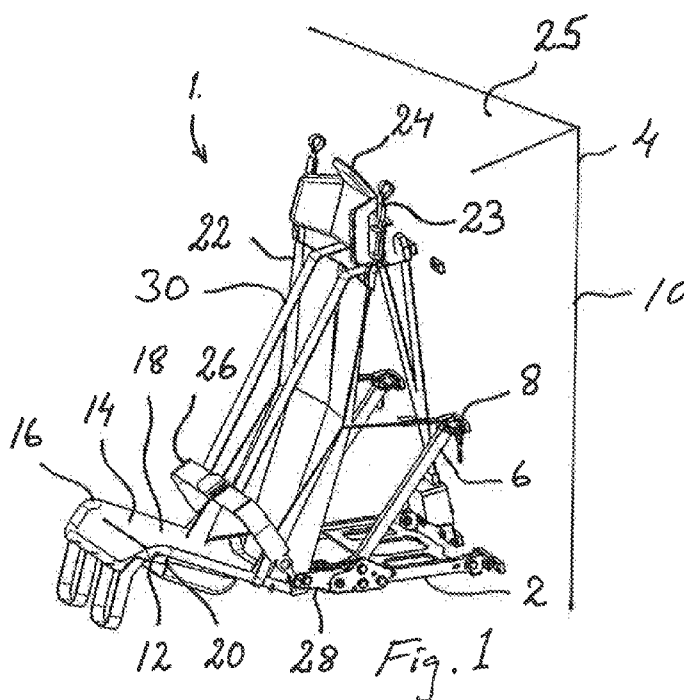

(57) **Abstract:** The invention relates to a vehicle seat comprising a base portion (2) for attachment in a vehicle (4); a seat bottom part (12), with a top side (18) and an underside (20), which seat bottom part (12) is attached to the base portion (2); a waist belt (26), which extends between the seat bottom part's (12) sides. At least one hinge mechanism (28; 28') that is adjustable between a first and a second position is arranged at the base portion (2). The waist belt (26) is attached to the hinge mechanism (28; 28'), so that the waist belts (26) position in relation to the seat bottom part (12) changes when one on the seat bottom part (12) acting force reaches a predetermined value, which force leads the hinge mechanism (28; 28') from the first to the second position.



Declarations under Rule 4.17:

Published:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))* — *with international search report (Art. 21(3))*