

(51) International Patent Classification:
H01Q 1/24 (2006.01) *H01Q 3/30* (2006.01)(21) International Application Number:
PCT/EP2010/052382(22) International Filing Date:
25 February 2010 (25.02.2010)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): TELEFONAKTIEBOLAGET L M ERICSSON (PUBL) [SE/SE]; S-164 83 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ATHLEY, Fredrik [SE/SE]; Asplyckevägen 1, S-429 31 Kullavik (SE). PETERSSON, Sven [SE/SE]; Rotevägen 1, S-433 69 Sävedalen (SE).

(74) Agent: ALBIHNS.ZACCO AB; Box 142, S-401 22 Göteborg (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: A COMMUNICATION SYSTEM NODE COMPRISING A TRANSFORMATION MATRIX

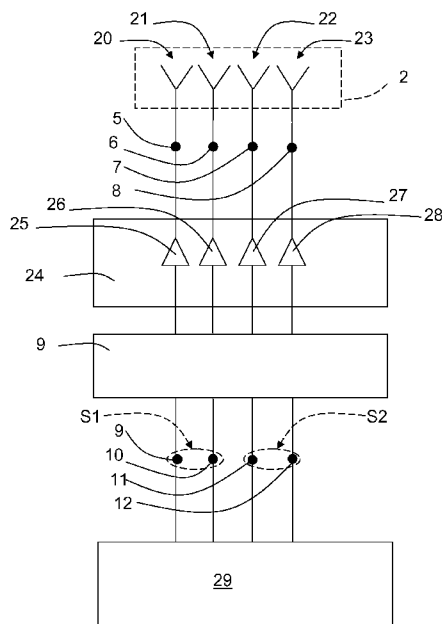


FIG. 2

(57) Abstract: The present invention relates to a node (1) in a wireless communication system, the node (1) comprising at least one antenna (2) which is arranged to cover a first sector (3) in a first direction (4) and comprises a number (A) of antenna ports (5, 6, 7, 8), which number (A) is at least four. The antenna ports (5, 6, 7, 8) are connected to a transformation matrix (9) which is arranged for transforming the antenna ports (5, 6, 7, 8) to at least a first set (S1) of virtual antenna ports (10, 11) and a second set (S2) of virtual antenna ports (12, 13), each set (S1, S2) comprising a number (B) of virtual antenna ports (10, 11; 12, 13). The number (B) of virtual antenna ports (10, 11; 12, 13) is less than or equal to half the number (A) of antenna ports (5, 6, 7, 8), but not falling below two. The sets (S1, S2) of virtual antenna ports (10, 11; 12, 13) correspond to virtual antennas which are arranged to cover at least a second sector (14) and a third sector (15) in a corresponding second direction (16) and third direction (17). The present invention also relates to a corresponding method.