

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
19 April 2001 (19.04.2001)

PCT

(10) International Publication Number
WO 01/28057 A1

- (51) International Patent Classification⁷: **H02G 3/22, 15/007**
- (21) International Application Number: **PCT/SE00/01924**
- (22) International Filing Date: **5 October 2000 (05.10.2000)**
- (25) Filing Language: **Swedish**
- (26) Publication Language: **English**
- (30) Priority Data:
9903636-0 8 October 1999 (08.10.1999) SE
- (71) Applicant (for all designated States except US): **ROXTEC AB [SE/SE]; P.O. Box 540, S-371 23 Karlskrona (SE).**
- (72) Inventor; and
(75) Inventor/Applicant (for US only): **KREUTZ, Tomas [SE/SE]; Ringövägen 89, S-371 60 Lyckeby (SE).**
- (74) Agents: **SUNDSTRÖM, Per et al.; Stenhagen Patentbyrå AB, P.O. Box 4630, S-116 91 Stockholm (SE).**
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**
- (84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).**
- Published:
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **A CABLE PENETRATION DEVICE**

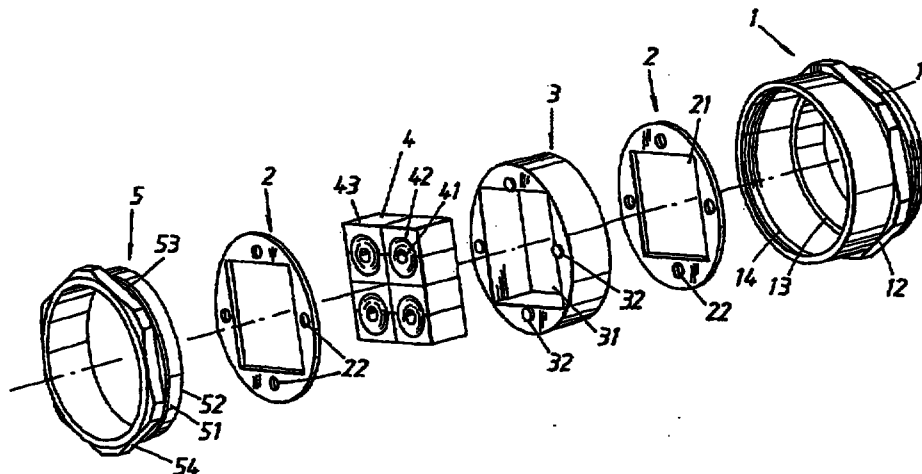

(57) Abstract: A cable transit device, or cable penetration device, includes a tubular sleeve (1) that has means (11) at one end for fastening the device to a wall opening, and that has at its other end a thread (14) which interacts with a thread (53) on a nut (5). The nut includes a support shoulder (52) and the device includes a rubber sleeve which is located in the tubular sleeve (1) and has an outer diameter corresponding to the inner diameter of the tubular sleeve. The rubber sleeve is accommodated between the circular shoulder of the tubular sleeve and the support shoulder of the nut. The device also includes a plurality of module elements (4), each containing a cable accommodating channel (41) and each being divided to allow lateral access to the channel/channels. The modules (4) together fill-out the opening (31) of the rubber sleeve and have a shape that corresponds to the resultant outer contour of the mutually sealingly combined modules.