

(19) World Intellectual Property Organization
International Bureau



162162

(43) International Publication Date
15 August 2002 (15.08.2002)

PCT

(10) International Publication Number
WO 02/063125 A1

(51) International Patent Classification⁷: **E05F 3/10**

(21) International Application Number: PCT/GB02/00213

(22) International Filing Date: 18 January 2002 (18.01.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0102610.3 2 February 2001 (02.02.2001) GB

(71) Applicant (for all designated States except US): **SAMUEL HEATH & SONS PLC** [GB/GB]; Cobden Works, Leopold Street, Birmingham B12 0UJ (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **FOSTER, Keith** [GB/GB]; 55 Hermitage Court, Knighten Street, Wapping, London E1W 1PW (GB).

(74) Agent: **FORRESTER KETLEY & CO.**; Chamberlain House, Paradise Place, Birmingham B3 3HP (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A DOOR CLOSER

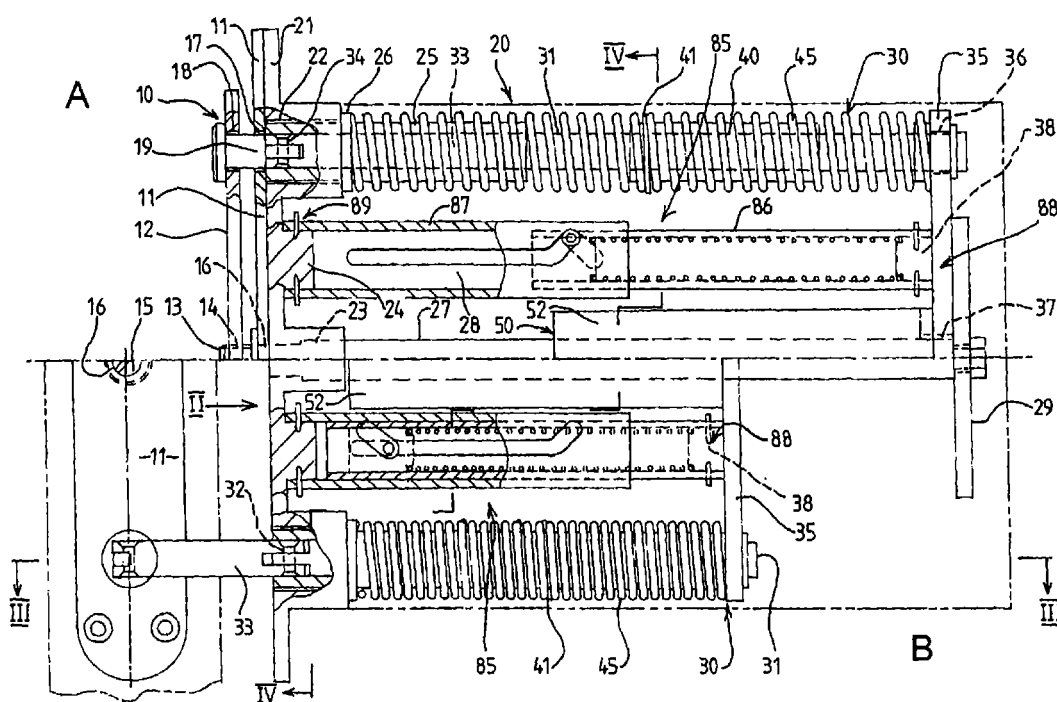

(57) Abstract: A door closer having a pair of main driving springs, a fluid-filled damper arrangement and a pair of thrust springs is provided, the thrust springs coming into effect during the latter part of a door closing operation, so as to provide an augmented closing force at that point. The position at which the augmented closing force is applied is variable, with a cam mechanism being used to control application of the increased closing force.



G00002

WO 02/063125 A1