

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 September 2003 (12.09.2003)

PCT

(10) International Publication Number
WO 03/073898 A1

(51) International Patent Classification⁷: **A47J 37/04**

(21) International Application Number: PCT/ZA03/00034

(22) International Filing Date: 27 February 2003 (27.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002/1719 1 March 2002 (01.03.2002) ZA

(71) Applicant and

(72) Inventor: **DE KOCK, Cilliers** [ZA/ZA]; 22 REEDBUCK CRESCENT, CORPORATE PARK, 1685 MIDRAND (ZA).

(74) Agent: **PELJPER INCORPORATED PELJPER, JOHAN AD; HAHN, HANS H; DUNLOP, ALAN JS; LUTEREK, JANUSZ F; WILLIAMS;** Suite 221, Barclay Square, 296 Walker Street, Sunnyside, 0002 Pretoria (ZA).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: APPARATUS FOR COOKING AND DISPENSING FOOD PRODUCTS

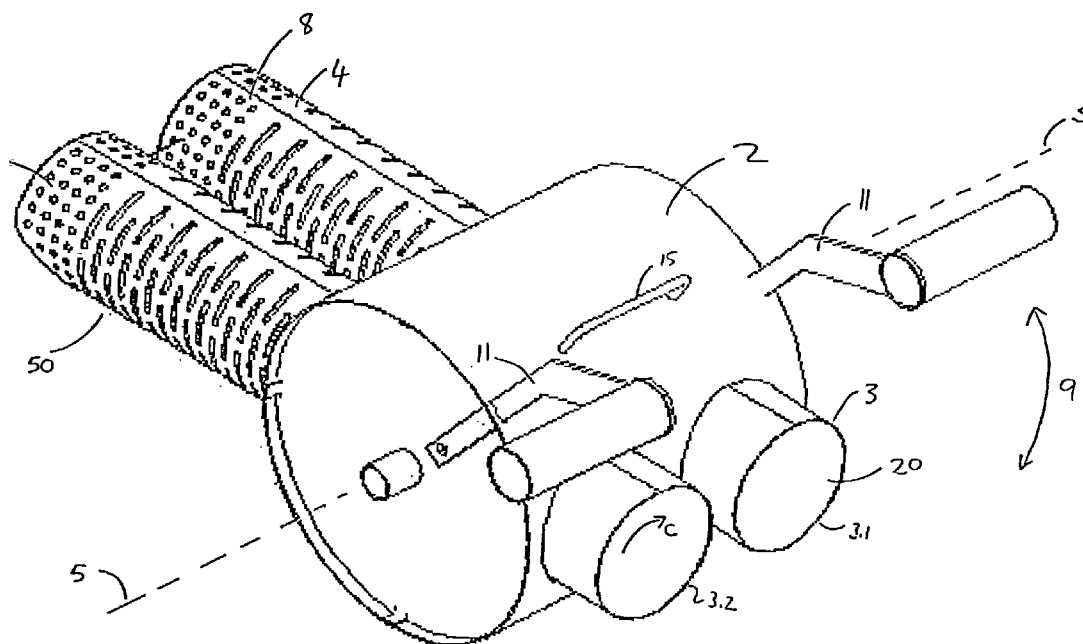

(57) Abstract: The invention provides a cooking apparatus (1) with a drum (2) for an apparatus for heating, cooking, frying, or otherwise preparing a food product by the application of heat. The drum (2) is provided with at least one pocket or receptacle member in the form of a tube (3) extending through drum (2) and having perforated walls 4 at a lower end of the tube. The tube (3) is rotatable about a horizontal axis (5), i.e. the tube (3) and drum (2) are displaceable between an upper and a lower position by rotation about axis (5) over an arc.



WO 03/073898 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.