



(51) International Patent Classification:
G05B 23/00 (2006.01) **F25D 29/00** (2006.01)
G01N 25/00 (2006.01)

(21) International Application Number:
PCT/SG2008/000261

(22) International Filing Date:
18 July 2008 (18.07.2008)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **SEN-SIMESH PTE LTD** [SG/SG]; 8 Kaki Buki View, Singapore 415945 (SG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WONG, Kim, Seng** [SG/SG]; 8 Kaki Bukit View, Singapore 415945 (SG). **YEO, Boon, Sain** [SG/SG]; 8 Kaki Bukit View, Singapore 415945 (SG). **TAN, Seng, Kee** [SG/SG]; 8 Kaki Bukit View, Singapore 415945 (SG).

(74) Agent: **ONG, Kheng Lu, Lucile, Frances**; Lloyd Wise, Tanjong Pagar, PO Box 636, Singapore 910816 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: AN APPARATUS AND METHOD FOR MONITORING REFRIGERATED CONTAINERS

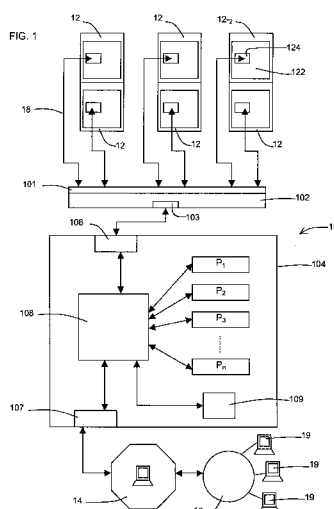

(57) Abstract: An apparatus (10) for monitoring operational parameters of at least one refrigerated container (12), the at least one refrigerated container (12) having an interrogation port (124), the apparatus (10) comprising a receiver (106) configured to receive data from the refrigerated container (12) via the interrogation port (124), a processor (108) configured to process the data received from the at least one refrigerated container (12), and a transmitter (107) for automatically transmitting processed data to a monitoring centre (14).