

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 November 2005 (17.11.2005)

PCT

(10) International Publication Number
WO 2005/109578 A1

(51) International Patent Classification⁷: **H01R 12/16**,
13/658

(74) Agents: **GOVER, Melanie G.**, et al.; Office of Intellectual
Property Counsel, Post Office Box 33427, Saint Paul, MN
55133-3427 (US).

(21) International Application Number:
PCT/US2005/011418

(22) International Filing Date: 6 April 2005 (06.04.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/833,836 28 April 2004 (28.04.2004) US

(71) Applicant: **3M INNOVATIVE PROPERTIES COM-
PANY** [US/US]; 3M Center, Post Office Box 33427, Saint
Paul, MN 55133-3427 (US).


(72) Inventors: **SCHERER, Richard J.**; 6801 River
Place Boulevard, Austin, TX 78726-9000 (US). **CAS-
TIGLIONE, Joseph N.**; 6801 River Place Boulevard,
Austin, TX 78726-9000 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM,
PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: LOW INDUCTANCE SHIELDED CONNECTOR

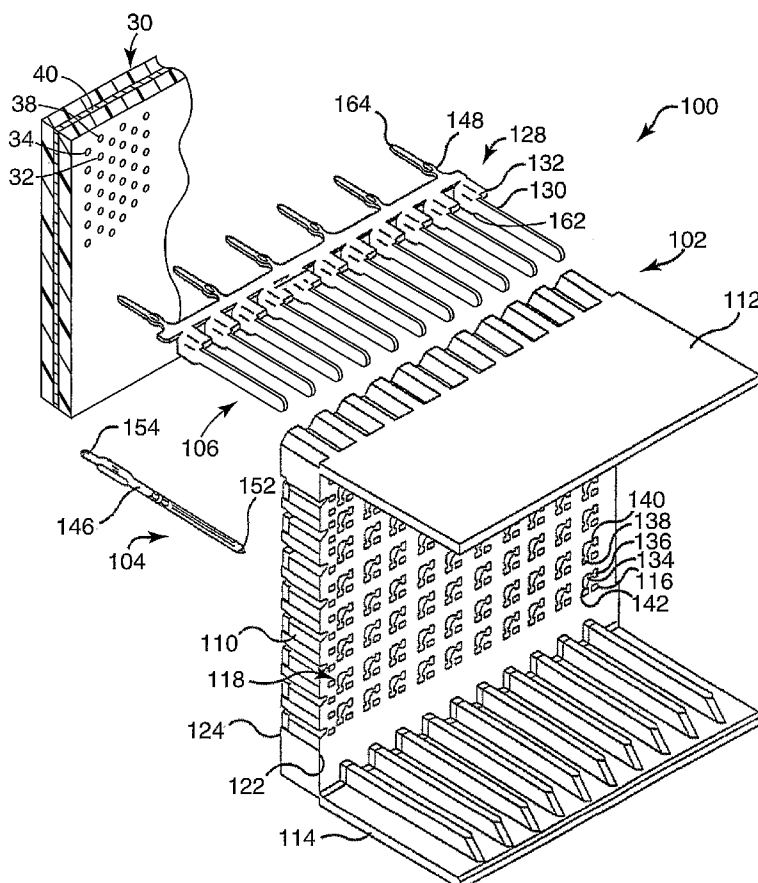

(57) Abstract: An electrical connector includes an insulative carrier (210) having therein at least one cable connector (220). The carrier (210) is configured to engage a header (100) having a plurality of signal pins (104) and a plurality of shield blades (106) extending therefrom. Each cable connector (220) terminates a corresponding cable (270) and includes a conductive outer housing (222) having an insulative inner housing (226). The inner housing (226) holds first and second conductive terminals (228, 230) in electrical isolation from each other and the outer housing (222). The inner housing (226) is configured for receiving a shield blade (106) between the first and second terminals (228, 230). The outer housing (222) includes a first contact (240) for electrically coupling with the shield blade (106) received between the first and second terminals (228, 230).



FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.