PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G06F 17/30

A1

(11) International Publication Number: WO 96/25715

(43) International Publication Date: 22 August 1996 (22.08.96)

(21) International Application Number: PCT/GB96/00333

(22) International Filing Date: 13 February 1996 (13.02.96)

(30) Priority Data:
95300878.6 13 February 1995 (13.02.95) EP
(34) Countries for which the regional or international application was filed: GB et al.

(71) Applicant *(for all designated States except US)*: BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY [GB/GB]; 81 Newgate Street, London EC1A 7AJ (GB).

(72) Inventor; and


(75) Inventor/Applicant *(for US only)*: BREAME, Francis, Vivian [GB/GB]; 68 Church Road, Bramshott, Liphook, Hampshire GU30 7SH (GB).

(74) Agent: EVERSHED, Michael; BT Group Legal Services, Intellectual Property Dept., 8th floor, Holborn Centre, 120 Holborn, London EC1N 2TE (GB).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KG, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published
With international search report.

(54) Title: A METHOD AND APPARATUS FOR BUILDING A TELECOMMUNICATIONS NETWORK DATABASE

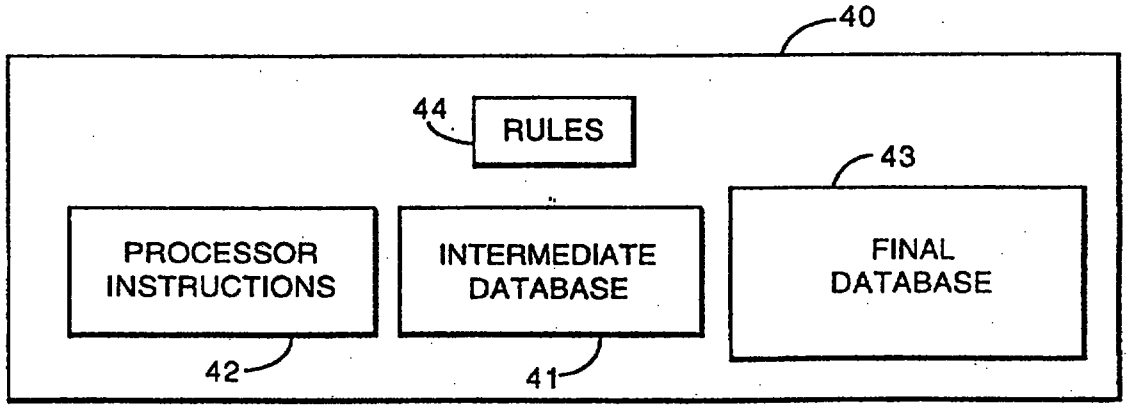

(57) Abstract

The invention provides a method and apparatus for building a telecommunications network database (43) from an existing network database (34). In the method the existing network database is processed to extract data which is then stored in an intermediate database (41). The intermediate database (41) has a structure which is different to the structure of the existing network database. The intermediate network database is then processed to produce a final database (43) which can be used in a network management system. Less processing effort is required to produce an intermediate database (43) and then to derive from it the final database (43), than would be the case if the final database (43) were to be derived directly from the existing database.