

POLISHING COMPOSITIONS AND METHODS OF USE THEREOF

FIELD OF THE DISCLOSURE

The present disclosure relates generally to polishing compositions, and methods for polishing semiconductor substrates using the compositions described herein. More particularly, the disclosure relates to chemical mechanical polishing compositions and methods for removing polysilicon layers from a semiconductor substrate.

BACKGROUND OF THE DISCLOSURE

Chemical mechanical polishing compositions are used in the semiconductor industry in a process step called chemical mechanical polishing/planarization (CMP). Along with photolithographic patterning and deposition, CMP is one of the three key enabling process steps in integrated circuit (IC) manufacturing process flow. Modern ICs are built in a parallel fashion, typically, hundreds at a time, on the surface of a common silicon wafer substrate. Photolithography, deposition, CMP and multiple auxiliary steps, are iteratively applied to the wafer surface where the evolving IC structures are located, until the final IC device is finished and the wafer is ready to be cut into individual dies (chips) for packaging.

SUMMARY OF THE DISCLOSURE

One purpose of the CMP step in this technology process flow is to reduce the overburden from the preceding deposition step to a specified layer thickness determined by the integration scheme, and to create a flat wafer surface to enable subsequent photolithography steps. CMP achieves this by polishing the wafer surface in a mechanical polisher. The polishing process involves holding the wafer in a rotating chuck (called the polishing head) and pressing the wafer against a compliant, felt-like polishing pad rotating on the polishing table (the platen), with a pre-selected pressure (the downforce), while applying an abrasive containing slurry (i.e., a chemical mechanical polishing composition) between the wafer surface and the polishing pad.

Some of the generally desired performance metrics for a CMP process based on a specific chemical mechanical polishing composition are: 1) high removal rates related to fab throughput efficiency; 2) high polishing selectivity related to the ability of the CMP process to stop on certain materials chosen as stop layers within the device layer stack; 3) low levels of defects (scratches, debris, leftover abrasive particles) related to enhancing the final device yield; and 4) uniform material removal across the wafer surface, which is related to the resultant wafer being suitably flat for subsequent photolithography steps. Uniform material removal within the die and across the wafer is also important for within-the-die and within-the-wafer device performance reproducibility and reliability.

Polycrystalline silicon, or polysilicon (P-Si), is a material widely used in the semiconductor industry for IC manufacturing in both logic and memory integration schemes in different roles, which range, depending on doping, from a conductor to an insulator. Within the integration schemes for logic applications, it is widely used as a gate electrode material for MOSFET/FinFET-type devices. On the memory side, polysilicon is used as part of the capacitor, gate, and contact plug structures as seen, for example, in DRAM integration. Silicon nitride (SiN) is another common material used in IC manufacturing. It is a versatile dielectric used where the default dielectric material, namely, silicon oxide, cannot be used due to various functional, or process limitations. On the logic side of the semiconductor industry, silicon nitride is widely used as the gate insulating material, and on the memory side, particularly in DRAM, it is typically used as the capacitor material. US 4897702 gives an example of a DRAM (type of memory) device using P-Si and SiN in the above-described capacities.

One of the requirements for polysilicon CMP in modern DRAM process flows is high polysilicon removal rates (e.g., > 8000Å/min) at low-to-intermediate downforce pressures (< 3psi). The high polysilicon removal rate is dictated by the need to remove exceedingly high polysilicon overburden within a short process time. Reduction of polishing process time is an important way of enhancing the fab manufacturing throughput efficiency. The need for a relatively low downforce pressure comes from the drive to minimize scratch defects associated

with the use of higher downforce pressures, and maximize the functional stopping layer thickness retention/budget critical for the device performance.

In the case of DRAM applications, as the stopping layer is typically silicon nitride, another requirement for the DRAM polysilicon CMP process is high polysilicon-to-silicon nitride removal rate selectivity (e.g., > 100:1). This level of rate selectivity ensures that, during the DRAM polysilicon CMP step, polysilicon is removed rapidly until the underlying silicon nitride layer is exposed, at which point the polishing process is stopped with minimum loss of the silicon nitride layer. The retention/minimization of loss of SiN is needed to ensure proper capping/encapsulation of the device with the insulator SiN dielectric. This, thus, improves electrical and overall DRAM device performance.

In addition to high polysilicon removal rates and low silicon nitride removal rates, the semiconductor industry presents a set of additional challenging requirements for polysilicon chemical mechanical polishing compositions. These additional requirements include: 1) low health hazard to promote chemical safety at the work place; and 2) low cost of ownership (COO), or, simply, a low cost of a chemical mechanical polishing composition, achieved by making the composition dilutable. Cost of ownership (COO) has emerged as an important business consideration for chemical mechanical polishing compositions in response to the continued efforts to reduce costs and improve business efficiency.

An important way to improve COO for a chemical mechanical polishing composition is to make the composition dilutable, such that the chemical mechanical polishing composition supplier provides a concentrated version of the polishing composition, and the customer dilutes the chemical mechanical polishing composition to a specified dilution level prior to use. Typical dilution levels vary widely from 2X to, in some cases, greater than 10X.

With respect to health and chemical safety, reduction of employee exposure to chemical hazards and toxic substances can ensure chemical safety and minimize adverse health

effects at the work place. The Global Harmonized System (GHS) of classification of hazardous substances mandated in the US by OSHA Hazard Communication Standard 29CFR1910.1200 provides a framework for understanding and communicating the level of health hazard associated with various chemicals. Chemicals with acute toxicity are grouped in categories, with Category 1 indicating the highest health hazard, while Category 5 indicates the lowest health hazard.

Virtually excluded are the substances classified as GHS Category 1 and 2 carcinogens, GHS Category 1 and 2 reproductive hazards, substances with GHS Category 1 and 2 acute toxicity, and GHS Category 1 and 2 sensitizers. There is substantial pressure on the suppliers of consumables for the semiconductor industry to formulate their products excluding the hazardous substances from the GHS categories listed above.

Semiconductor manufacturers continue to restrict the use of hazardous chemicals in their fabs, particularly, in their CMP modules. The CMP module (as opposed to Etch, Lithography, etc.) is particularly sensitive to hazardous chemicals because there are very few engineering controls to prevent the amount of hazardous chemical release to the waste-water stream. Typically, the CMP polisher equipment has its plumbing tied-in to public waste-water stream. Once the fabs polish wafers, the post-polishing CMP slurry is released to public waste-water stream. Thus, these hazardous chemicals are responsible for contaminating the public waste-water near the fabs. Each city's Environmental Health and Safety (EHS) monitor the waste-water discharge of these fabs on a daily basis. Thus, it is desirable by all fabs to have limited to no exposure of hazardous chemicals in the CMP slurries of the vendors. Other modules such as Etch modules can isolate the chemical waste, which can then be sent off-site for proper chemical disposal. As such, they typically do not face the environmental issues that the CMP vendors face.

In addition to abrasive nanoparticles, components of known polysilicon chemical mechanical polishing compositions are chemical additives promoting polysilicon removal rates


through chemical reactions with the polysilicon film. Traditionally, and historically, tetramethylammonium hydroxide (TMAH) has been the chemical additive of choice in chemical mechanical polishing compositions designed for high polysilicon and single-crystal silicon removal rate. For example, US Patent Application Pub. No. 2009/0156008 (Sakamoto, et al.) describes a chemical mechanical polishing composition containing about 0.28% TMAH at point of use (POU), demonstrating single-crystal silicon material removal rates on the order of 10,000Å/min. US Patent No. 8,697,576 (Reiss, et al.) describes a polysilicon chemical mechanical polishing composition containing 0.25% TMAH at POU, demonstrating polysilicon removal rates of about 4,500 Å/min.

Although an efficient promoter of polysilicon and single-crystal silicon removal rate, TMAH is classified as a substance with acute oral and dermal toxicity (GHS Category 2), and with specific target organ (e.g., central nervous system, thymus gland, or liver) toxicity (GHS Category 1). TMAH has been involved in multiple high-profile industrial accidents with three combined fatalities [Lin, Chun-Chi, et al, 2010, Clinical Toxicology (48), 3, 213-217]. Thus, there is a desire for TMAH-free chemical mechanical polishing compositions for polysilicon CMP. Many fabs also complain about TMAH getting into their city's waste-water stream and the city officials requesting that TMAH be banned in the CMP slurry module of the fabs.


The present disclosure provides chemical mechanical polishing formulations and methods for use thereof demonstrating very high polysilicon removal rates (e.g., in excess of 8000Å/min), and high selectivity with respect to silicon nitride (e.g., having polysilicon-to-silicon nitride removal rate ratios of >100:1). Moreover, most of the components of the chemical mechanical polishing compositions described herein are generally of low health hazard (e.g., classified as a GHS Category 3 or above). In some embodiments, the chemical mechanical polishing compositions of the disclosure contain no compounds with the health hazards not permitted in the CMP modules of semiconductor fabs (e.g., GHS Category 1 and 2 carcinogens, GHS Category 1 and 2 reproductive hazards, substances with GHS Category 1 and 2 acute toxicity, and GHS Category 1 and 2 sensitizers). In addition, the chemical mechanical polishing

compositions of the disclosure provide low cost of ownership (COO) by being at least 2X dilutable.

In some embodiments, the disclosure features chemical mechanical polishing compositions including 1) at least one abrasive;
2) at least one compound of structure (I):

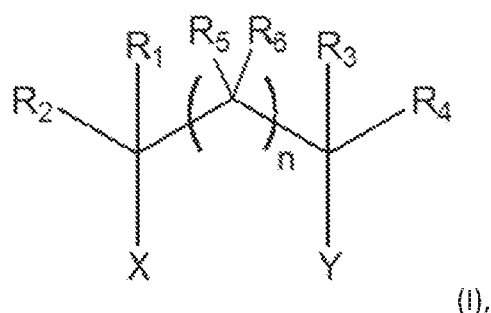

in which n is 0, 1, 2, or 3; each of X and Y , independently, is $O(R_a)$, $CH_2(R_a)$, or $NH(R_a)$, provided that at least one (e.g., both) of X and Y is $O(R_a)$ or $NH(R_a)$, in which each R_a , independently, is H or C_1 - C_3 alkyl optionally substituted by hydroxyl or NH_2 , and each of R_1 - R_6 , independently, is H , OH , or C_1 - C_3 alkyl optionally substituted by OH or NH_2 ; 3) at least one compound of structure (II):



in which each of Z_1 and Z_2 , independently, is $-CR_8-$ or $-N-$, in which R_8 is H , $N(R_b)_2$, $COOH$, C_1 - C_3 alkyl; each R_b , independently, being H or C_1 - C_3 alkyl; or Z_1 and Z_2 together form a 5-6 membered ring fused with the 5-membered ring in Structure (II); Z_3 is $-C-$ or $-N-$; and R_7 is H , $COOH$, C_1 - C_3 alkyl or $N(R_9)_2$, in which each R_9 , independently, is H or C_1 - C_3 alkyl; provided that, when Z_3 is $-N-$, R_7 is deleted; and 4) water. The composition does not include tetramethylammonium hydroxide or a salt thereof.

In some embodiments, this disclosure features methods for polishing polysilicon film exposed on the surface of a wafer substrate by treating the polysilicon film with a chemical mechanical polish composition described herein. Such methods can be performed, for example, by A) placing the wafer in a polisher equipped with a polishing pad, and B) polishing the wafer with the polishing pad in the presence of a chemical mechanical polishing composition described herein.

DETAILED DESCRIPTION OF THE DISCLOSURE


The chemical mechanical polishing compositions set forth in this disclosure contain abrasives that are generally insoluble in water. Therefore, the compositions of the disclosure may be referred to as slurries. For the purposes of this disclosure, the terms “composition” and “slurry” and “compositions” and “slurries” are used interchangeably.

The chemical mechanical polishing compositions described herein provide high polysilicon removal rates (e.g., at least 8000 Å/min) and high polysilicon-to-silicon nitride removal rate selectivity (at least 50:1) while employing components characterized by having low health hazards. The chemical mechanical polishing compositions of the disclosure may be used as replacements for analogous products containing tetramethylammonium hydroxide (TMAH) as the promoter of polysilicon removal rate, which is a recognized health hazard due to its high toxicity.


Without wishing to be bound by theory, it is believed that the high polysilicon removal rates (at least 8000 Å/min) and/or high polysilicon-to-silicon nitride removal rate ratios (e.g., at least 50:1) provided by the chemical mechanical polishing compositions of the disclosure is achieved due to a synergistic effect during polishing between the compound of structure (I) and the compound of structure (II). Although the mechanism of this effect is not entirely clear, as the examples herein illustrate, high polysilicon removal rates and/or high polysilicon-to-silicon nitride removal rate ratios are observed when both components are present in the polishing

formulation. In some embodiments, if either one is omitted, the resultant polysilicon removal rates and/or polysilicon-to-silicon nitride removal rate ratios can be significantly lower.

In some embodiments, the disclosure features chemical mechanical polishing compositions including 1) at least one abrasive; 2) at least one compound of structure (I):

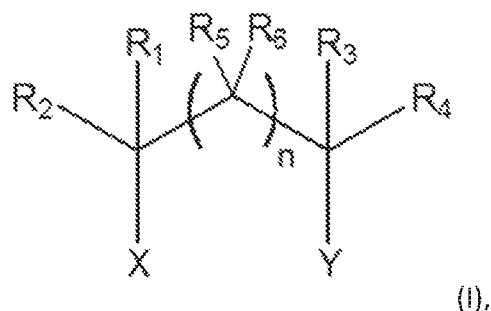

in which n is 0, 1, 2, or 3; each of X and Y , independently, is $O(R_a)$, $CH_2(R_a)$, or $NH(R_a)$, provided that at least one (e.g., both) of X and Y is $O(R_a)$ or $NH(R_a)$, in which each R_a , independently, is H or C_1 - C_3 alkyl optionally substituted by hydroxyl or NH_2 , and each of R_1 - R_6 , independently, is H, OH, or C_1 - C_3 alkyl optionally substituted by OH or NH_2 ; 3) at least one compound of structure (II):



in which each of Z_1 and Z_2 , independently, is $-CR_8-$ or $-N-$, in which R_8 is H, $N(R_b)_2$, $COOH$, C_1 - C_3 alkyl; each R_b , independently, being H or C_1 - C_3 alkyl; or Z_1 and Z_2 together form a 5-6 membered ring fused with the 5-membered ring in Structure (II); Z_3 is $-C-$ or $-N-$; and R_7 is H, $COOH$, C_1 - C_3 alkyl or $N(R_9)_2$, in which each R_9 , independently, is H or C_1 - C_3 alkyl; provided that, when Z_3 is $-N-$, R_7 is deleted; and 4) water. The composition does not include tetramethylammonium hydroxide or a salt thereof.

As used herein, the term “C₁₋₃ alkyl” refers to a saturated hydrocarbon group that can be straight-chained or branched and can have 1 to 3 carbons, such as methyl, ethyl, propyl, or isopropyl.

In some embodiments, n in formula (I) is 0. In such embodiments, Y can be NH(R_a), in which R_a is H or C₁₋₃ alkyl optionally substituted by hydroxyl (e.g., hydroxylethyl); X can be O(R_a), in which R_a is H or C₁₋₃ alkyl optionally substituted by hydroxyl (e.g., hydroxylethyl); R₁ can be H; R₂ can be H or C₁₋₃ alkyl (e.g., methyl or ethyl); R₃ can be H, and R₄ can be H or C₁₋₃ alkyl (e.g., methyl). In some embodiments, when n is 0 and each of R₁-R₄ is H, at least one of X and Y is OH.

In some embodiments, n in formula (I) is 1. In such embodiments, Y can be NH(R_a), in which R_a is C₁₋₃ alkyl optionally substituted by hydroxyl (e.g., hydroxylethyl); X can be OH or NH₂; R₁ can be H; R₂ can be H; R₃ can be H; R₄ can be H; R₅ can be H or C₁₋₃ alkyl (e.g., methyl); and R₆ can be H, OH, and or C₁₋₃ alkyl (e.g., methyl or ethyl).

In some embodiments, at most one of R₁-R₄ or R₁-R₆ in formula (I) is OH or C₁₋₃ alkyl optionally substituted by OH or NH₂. For example, when n in formula (I) is 0, X is O(R_a), and Y is NH(R_a), R₁-R₃ can be H and R₄ can be C₁₋₃ alkyl (e.g., methyl or ethyl) optionally substituted by OH or NH₂. Examples of such amines include 1-amino-2-propanol and 1-amino-2-butanol. In some embodiments, when X is NH(R_a) and Y is O(R_a), one of R₃ and R₄ is OH or C₁₋₃ alkyl optionally substituted by OH or NH₂; and the other of R₃ and R₄ is H.

In some embodiments, the compound of structure (I) is an aminoalcohol. Exemplary aminoalcohols contemplated for use in the practice of the disclosure include, but are not limited to, monoethanolamine, diethanolamine, 1-amino-2-propanol, 1-amino-2-butanol, 1,3-diamino-2-propanol, 3-amino-1,2-propanediol, 3-amino-1-propanol, 2-(2-aminoethoxy)ethanol, 2-amino-3-methyl-1-butanol, 5-amino-1-pentanol, and the like.

In some embodiments, the compound of structure (I) is a diamine. Exemplary diamines contemplated for use in the practice of the disclosure include, but are not limited to, 2,2-dimethyl-1,3-propane diamine, 1,3-diaminopentane, 2-(3-aminopropylamino)ethanol, and the like

In some embodiments, the compound of structure (I) is in an amount of at least about 0.1 wt% (e.g., at least about 0.25 wt%, at least about 0.5 wt%, at least about 0.6 wt%, at least about 0.7 wt%, at least about 0.8 wt%, at least about 0.9 wt%, at least about 1 wt%, at least about 1.25 wt%, at least about 1.5 wt%, at least about 1.75 wt%, at least about 2 wt%, or at least about 2.5 wt%, or at least about 3 wt%) to at most about 15 wt% (e.g., at most about 12.5 wt%, at most about 10 wt%, at most about 7.5 wt%, at most about 5 wt%, at most about 4 wt%, at most about 3 wt%, or at most about 2 wt%) of the CMP composition, either in a concentrated form or in a diluted, point of use (POU) slurry.

In some embodiments, when Z_3 in formula (II) is -C-, one of Z_1 and Z_2 can be -N-. In such embodiments, Z_1 can be -N-; Z_2 can be -CR₈-, in which R₈ is H or NH₂; and R₇ can be NH₂ or COOH. In some embodiments, when Z_3 in formula (II) is -C-, both of Z_1 and Z_2 can be -N-. In such embodiments, R₇ can be NH₂.

In some embodiments, the compound of structure (II) is a triazole. Exemplary triazoles contemplated for use in the practice of the disclosure include, but are not limited to, benzotriazole, 3-amino 1,2,4-triazole, 3,5-diamino-1,2,4-triazole, 1,2,4-triazole-3-carboxylic acid, and the like.

In some embodiments, the compound of structure (II) is a tetrazole. Exemplary tetrazoles contemplated for use in the practice of the disclosure include, but are not limited to, 5-(aminomethyl)tetrazole, 5-methyl-1H-tetrazole, 5-aminotetrazole (ATA), their hydrates (e.g., monohydrates), and the like.

It is understood that tautomeric forms of the azoles of structure (II) rapidly interconvert in the aqueous chemical mechanical polishing compositions described herein and are thus equivalent to one another. All tautomeric forms of the azoles described herein are contemplated for use in the CMP compositions described herein.

In some embodiments, the compound of structure (II) is in an amount of at least about 0.1 wt% (e.g., at least about 0.2 wt%, at least about 0.3 wt%, at least about 0.4 wt%, at least about 0.5 wt%, at least about 0.6 wt%, at least about 0.7 wt%, at least about 0.8 wt%, at least about 0.9 wt%, at least about 1 wt%, at least about 1.25 wt%, at least about 1.5 wt%, at least about 1.75 wt%, or at least about 2 wt%) to at most about 15 wt% (e.g., at most about 12.5 wt%, at most about 10 wt%, at most about 7.5 wt%, at most about 5 wt%, at most about 4 wt%, at most about 3 wt%, at most about 2 wt%, at most about 1 wt%, at most about 0.9 wt%, at most about 0.8 wt%, at most about 0.7 wt%, at most about 0.6 wt%, or at most about 0.5 wt%) of the CMP composition, either in a concentrated form or in a diluted, point of use (POU) slurry.

In some embodiments, the abrasives contemplated for use include alumina, fumed silica, colloidal silica, coated particles, titania, ceria, zirconia, and any combinations thereof. In some embodiments the abrasive is colloidal silica.

In addition, silica particles contemplated for use include sol-gel-derived colloidal silica without surface modification, and sol-gel-derived colloidal silica with surface modification. The surface modified silica can be anionic silica or cationic silica. The silica particles may include colloidal silica particles with isotropic spherical morphology characterized by primary particle diameter d_1 , or colloidal silica particles with aggregate morphology (predominantly fused dimers and trimers) characterized by primary and secondary particle diameters d_1 and d_2 . In some embodiments, the silica morphology type is the aggregate morphology with primary particle diameter d_1 of less than 80 nm but greater than 10 nm, and secondary particle diameter d_2 of less than 160 nm but greater than 20nm.

As demonstrated in the examples, it is believed that an important factor responsible for the high performance of the chemical mechanical polishing compositions described herein is an unexpected synergy of the compounds of structure (I) and structure (II).

In some embodiments, the abrasive is in an amount of at least about 0.05 wt% (e.g., at least about 0.10 wt%, at least about 0.25 wt%, at least about 0.5 wt%, at least about 0.75 wt%, at least about 1 wt%, at least about 1.25 wt%, at least about 1.5 wt%, at least about 1.75 wt%, at least about 2 wt%, at least about 2.5 wt%, or at least about 3 wt%) to at most about 20 wt% (e.g., at most about 15 wt%, at most about 12.5 wt%, at most about 10 wt%, at most about 7.5 wt%, at most about 5 wt%, at most about 4 wt%, at most about 3 wt%, at most about 2 wt%, or at most about 1 wt%) of the CMP composition, either in a concentrated form or in a diluted, point of use (POU) slurry.

In some embodiments, the chemical mechanical polishing compositions described herein can include at least one aminophosphonic acid. Examples of suitable aminophosphonic acids include, but are not limited to, ethylenediamine tetra(methylene phosphonic acid), amino tri(methylene phosphonic acid) (also referred to as aminotris(methanephosphonic acid)), diethylenetriamine penta(methylene phosphonic acid), and salts thereof. Commercially available examples of the aminophosphonic acid include DEQUEST series of products available from Italmatch Chemicals S.P.A. (Arese, Italy). In some embodiments, the aminophosphonic acid is in an amount of at least about 0.01 wt% (e.g., at least about 0.05 wt%, at least about 0.1 wt%, at least about 0.25 wt%, at least about 0.5 wt%, at least about 0.75 wt%, or at least about 1 wt%) to at most about 5 wt% (e.g., at most about 4 wt%, at most about 3 wt%, at most about 2 wt%, or at most about 1 wt%) of the CMP composition, either in a concentrated form or in a diluted, point of use (POU) slurry. Without wishing to be bound by theory, it is believed that such aminophosphonic acids can further enhance the performance (e.g., the polysilicon removal rate, the polysilicon-to-silicon nitride removal selectivity, or both) of the CMP compositions described herein.

In some embodiments, the chemical mechanical polishing compositions described herein can further include one or more low health hazard salts containing a zwitterion (e.g., classified as a GHS Category 3 or above). In some embodiments, the salts can contain a sulfonate group, an amino group, a carboxylate group, or a tetraalkylammonium group, where the salts containing a tetraalkylammonium group is different from a salt of tetramethylammonium hydroxide. Examples of salts that can be used for this purpose include, but are not limited to, various amino acids, such as glycine, taurine, choline hydroxide, and the like. In some embodiments, the salt is in a mount of at least about 0.05 wt% (e.g., at least about 0.1 wt%, at least about 0.2 wt%, at least about 0.3 wt%, at least about 0.4 wt%, at least about 0.5 wt%, at least about 0.6 wt%, at least about 0.7 wt%, at least about 0.8 wt%, at least about 0.9 wt%, or at least about 1 wt%) to at most about 5 wt% (e.g., at most about 4 wt%, at most about 3 wt%, at most about 2 wt%, at most about 1.9 wt%, at most about 1.8 wt%, at most about 1.7 wt%, at most about 1.6 wt%, at most about 1.5 wt%, at most about 1.4 wt%, at most about 1.3 wt%, at most about 1.2 wt%, at most about 1.1 wt%, or at most about 1 wt%) of the CMP composition described herein, either in a concentrated form or in a diluted, point of use (POU) slurry. In some embodiments, the upper limit of the salt concentration can be the concentration of the 2X-dilutable concentrate of the formulation. In some embodiments, the concentration of glycine can be about 0.75 wt% and the concentration of choline hydroxide can be about 0.5 wt%. Without wishing to be bound by theory, it is believed that such salts can further enhance the performance (e.g., the polysilicon removal rate, the polysilicon-to-silicon nitride removal selectivity, or both) of the CMP compositions described herein.

Concentrate-ability (also referred to as "dilute-ability") is one of the requirements set by the semiconductor manufacturers for any modern chemical mechanical polishing composition, intended to reduce the cost of ownership (COO) of the manufacturing consumable. The chemical mechanical polishing compositions described herein can be used as an at least 2X-dilutable concentrate mixture. In other words, the chemical mechanical polishing compositions can be diluted at least 2-fold (e.g., at least 3-fold, at least 4-fold, at least 5-fold, or at least 10-fold) prior to use by the end user. The chemical mechanical polishing compositions of the

disclosure can include 0.05 - 20 weight percent (e.g., 2-3 weight percent) abrasives in a 2X concentrate composition mixture.

In addition, in some embodiments, the chemical mechanical polishing compositions of the disclosure can contain one or more additives, such as, pH adjusting agents, corrosion inhibitors, surfactants, organic solvents, and defoaming agents as optional components.

In some embodiments, the chemical mechanical polishing compositions of the disclosure include at least one pH adjusting agent. The pH adjusting agent can bring the chemical mechanical polishing compositions into the operational pH range. A variety of basic pH adjusting agents are contemplated for use, including, but not limited to, potassium hydroxide, ammonium hydroxide, sodium hydroxide, cesium hydroxide, triethanol amine, tetrabutyl ammonium hydroxide, or any combinations thereof.

In some embodiments, water is in an amount of at least about 50 wt% (e.g., at least about 55 wt%, at least about 60 wt%, at least about 65 wt%, at least about 70 wt%, at least about 75 wt%, at least about 80 wt%, at least about 85 wt%, at least about 90 wt%, at least about 95 wt%, or at least about 97 wt%) to at most about 99 wt% (e.g., at most about 95 wt%, at most about 90 wt%, at most about 85 wt%, at most about 75 wt%, at most about 70 wt%, at most about 65 wt%, at most about 60 wt%, or at most about 55 wt%) of the CMP composition, either in a concentrated form or in a diluted, point of use (POU) slurry.

In some embodiments, the CMP compositions of the disclosure can have a pH of at least about 7 (e.g., at least about 7.5, at least about 8, at least about 8.5, at least about 9, at least about 9.5, or at least about 10) to at most of 12 (e.g., at most about 11.5, at most about 11, at most about 10.5, or at most about 10). Without wishing to be bound by theory, it is believed that CMP compositions that do not have the above pH may not be able to achieve a high polysilicon removal rate, a high polysilicon-to silicon nitride removal rate ratio, or both.

In some embodiments, when the CMP compositions of the disclosure are diluted, at least one oxidizing agent can be added to the composition. Oxidizing agents contemplated for use in the compositions of the disclosure include, but are not limited to, hydrogen peroxide, ammonium persulfate, silver nitrate (AgNO_3), ferric nitrates or chlorides, peracids or salts thereof, ozone water, potassium ferricyanide, potassium dichromate, potassium iodate, potassium bromate, vanadium trioxide, hypochlorous acid, sodium hypochlorite, potassium hypochlorite, calcium hypochlorite, magnesium hypochlorite, ferric nitrate, KMnO_4 , other inorganic or organic peroxides, or mixtures thereof. In some embodiments, the oxidizing agent can be hydrogen peroxide. The oxidizing agent can be present in an amount of about 0.1 wt % to about 5 wt% (e.g., from about 0.4 wt % to about 2 wt %) of the composition, either in a concentrated form or in a diluted, point of use (POU) slurry. In some embodiments, the CMP compositions described herein can exclude the oxidizing agent described above.

In some embodiments, the CMP compositions of the disclosure can exclude certain components, such as tetramethylammonium hydroxide or a salt thereof, an oxidizing agent (such as those described above), a bicarbonate salt (e.g., potassium bicarbonate or ammonium bicarbonate), a carbonate salt (e.g., guanidine carbonate), a health hazardous chemical classified as a GHS Category 1 or 2 (e.g., ethylene diamine, piperazine, 1,3-diaminopropane, imidazole, 1,2,4-triazole, or 3-amino-1,2,4-triazole), and/or a compound having a boiling point less than 50°C (e.g., propylamine or isopropylamine).

In general, the CMP compositions of the disclosure can have a relatively high polysilicon removal rate. In some embodiments, the CMP compositions of the disclosure can have a polysilicon removal rate of from at least about 8,000 Å/minute (e.g., at least about 8,500 Å/minute, at least about 9,000 Å/minute, at least about 9,500 Å/minute, at least about 10,000 Å/minute, at least about 10,500 Å/minute, at least about 11,000 Å/minute, at least about 11,500 Å/minute, or at least about 12,000 Å/minute) to at most about 15,000 Å/minute (e.g., at most about 14,000 Å/minute or at most about 13,000 Å/minute). As mentioned herein, the polysilicon removal rates are measured at a polishing downforce pressure of 2.5 psi.

In general, the CMP compositions of the disclosure can have a relatively high polysilicon-to-silicon nitride removal selectivity (e.g., relatively high polysilicon-to-silicon nitride removal rate ratio). In some embodiments, the CMP compositions of the disclosure can have a polysilicon-to-silicon nitride removal rate ratio of from at least about 50:1 (e.g., at least about 75:1, at least about 100:1, at least about 110:1, at least about 120:1, at least about 130:1, at least about 140:1, or at least about 150:1) to at most about 200:1 (e.g., at most about 180:1 or at most about 150:1). As mentioned herein, the polysilicon-to-silicon nitride removal rate ratios/selectivities are measured at a polishing downforce pressure of 2.5 psi.

In general, the components (e.g., the abrasives, the compounds of structures (I) and (II), the aminophosphonic acid, and the additives) of the CMP compositions described in this disclosure can be obtained from commercial sources or can be synthesized by methods known in the art.

In some embodiments, this disclosure features methods for polishing polysilicon film exposed on the surface of a wafer substrate that include the step of treating the polysilicon film with a chemical mechanical polishing composition described herein. Such methods can be performed, for example, by

- A) placing the wafer in a polisher equipped with a polishing pad,
- B) contacting the wafer with the polishing pad in the presence of a chemical mechanical polishing composition described herein. In some embodiments, the CMP compositions can be diluted with DI water (e.g., at least 2-fold, at least 3-fold, at least 4-fold, at least 5-fold, or at least 10-fold) prior to the treating or contacting the polysilicon film with the CMP compositions. Other components and/or steps used in the above CMP methods are either described below or are known in the art.

The contents of all publications cited herein (e.g., patents, patent application publications, and articles) are hereby incorporated by reference in their entirety.

The following examples are intended to further illustrate the subject matter of this disclosure and should in no way be construed as limiting the disclosure.

EXAMPLES

The chemical mechanical polishing compositions in the examples below were prepared according to the description accompanying each example. The polishing tests to obtain polysilicon and silicon nitride removal rates with each chemical mechanical polishing composition from the examples below were performed as follows.

Two hundred-millimeter polysilicon and silicon nitride wafers were polished for 60 seconds each using an Applied Materials Mirra polisher equipped with a VISIONPAD™ 6000 polishing pad available from the DOW Chemical Company, with a down force of 2.5 psi, a chemical mechanical polishing composition flow rate of 200 ml/min, a platen rotation speed of 120 rpm and a carrier head rotation speed of 114 rpm. The silicon and silicon nitride material removal rates were determined by subtracting the post-polish silicon or silicon nitride film thickness on the blanket wafer from the pre-polish film thickness on the same blanket wafer, and dividing the difference by the polish time. The film thickness values were the average of 29 film thickness measurements taken across the wafer using a Filmetrics F80C ellipsometer instrument. The polysilicon-to-silicon nitride removal rate ratios for each chemical mechanical polishing composition was determined by dividing the polysilicon removal rate by the silicon nitride removal rate obtained from polishing the corresponding blanket wafers with the chemical mechanical polishing composition in question.

Example 1

This example compares the polishing performance of comparative chemical mechanical polishing compositions that do not contain compounds of structure (I) (i.e., C-1A through C-1D, Table 1.1) to chemical mechanical polishing compositions of the disclosure (i.e., 1E, 1F, 1G, and 1H).

The chemical mechanical polishing compositions C-1A through C-1D and 1E through 1H each contained amine compound 1A through 1H listed in Table 1.1, 5-aminotetrazole monohydrate, aminotris(methanephosphonic acid), high-purity colloidal silica, and potassium hydroxide to adjust pH of the mixture to a final value of 10.8. The polysilicon and silicon nitride removal rates were determined in polishing tests P-1A through P-1F (comparative) and P-1G and P-1H (present disclosure) in Table 1.2 using chemical mechanical polishing compositions C-1A through C-1D and 1E through 1H from Table 1.1. The test results are summarized in Table 1.2.

The examples demonstrate the advantage of the amines of structure (I), where X is an alkyl, hydroxyl, or substituted hydroxyl, and Y is an amino group (1E, 1F, 1G, and 1H), over other amine structures with a structure different from structure (I).

For example, the results in Table 1.2 demonstrate that chemical mechanical polishing composition 1F containing an amine with structure (I), where X is a hydroxylethoxy, Y is an amino group, and $n=0$, namely, 2-(2-aminoethoxy)ethanol, and an azole with structure (II), wherein $Z_1 = Z_2 = N$; Z_3 is C and R_7 is NH_2 , namely, 5-aminotetrazole, exhibited the fourth highest polysilicon removal rate and fifth highest polysilicon-to-silicon nitride removal rate ratio among the tested chemical mechanical polishing compositions.

As another example, the results in Table 1.2 demonstrate that chemical mechanical polishing composition 1G containing an amine with structure (I), where X is a hydroxyl, Y is an amino group, and $n=0$, namely, monoethanolamine, and an azole with structure (II), namely, 5-aminotetrazole, exhibited the third highest polysilicon removal rate and fourth highest polysilicon-to-silicon nitride removal rate ratio among the tested chemical mechanical polishing compositions.

The results in Table 1.2. also show that chemical mechanical polishing composition 1H containing an amine with structure (I), where X is a hydroxyl, Y is an amino- group, and $n=1$, namely, 3-amino-1-propanol, and an azole with structure (II), namely, 5-aminotetrazole, exhibited the highest polysilicon removal rate and second highest polysilicon-to-silicon nitride removal rate ratio among the tested chemical mechanical polishing compositions.

The results in Table 1.2. also show that chemical mechanical polishing composition 1E containing an amine with structure (I), where X is a CH_3 group, Y is an amino- group, and $n=0$, namely, propylamine, and an azole with structure (II), namely, 5-aminotetrazole, exhibited the second highest polysilicon removal rate and the highest polysilicon-to-silicon nitride removal rate ratio among the tested chemical mechanical polishing compositions in this particular example.

Comparative chemical mechanical polishing compositions, such as C-1D, based on non-functionalized amines exemplified by amine 1D (isopropylamine) can yield a high polysilicon to silicon nitride removal rate ratio (polishing example P-1D, Table 1.2). However, the low boiling point of such amines and associated toxicity and fire hazard render these amines poorly suitable for chemical mechanical polishing composition applications.

The chemical mechanical polishing composition based on amine 1D (which has a very low boiling point) is included in this example for comparative purposes only. Once this amine is excluded, it is evident that chemical mechanical polishing composition 1G, based on a functionalized amine 1G with structure (I), where X is a hydroxyl, Y is an amino- group, and $n=0$, namely, monoethanolamine, exhibited polysilicon removal rates that are at least 25% higher, and the polysilicon to silicon nitride removal rate ratios that are at least 26% higher than the remaining comparative chemical mechanical polishing composition examples in Table 1.2. Similarly, the chemical mechanical polishing composition based on amine 1-H with structure (I), where X is a hydroxyl, Y is an amino- group, and $n=1$, namely, 3-amino-1-propanol, exhibited polysilicon removal rates that are at least 38% higher, and the polysilicon to silicon nitride

removal rate ratios that are at least 47% higher than the comparative chemical mechanical polishing composition examples in Table 1.2. Further, the chemical mechanical polishing composition based on amine 1-F, i.e., 2-(2-aminoethoxy)ethanol exhibited polysilicon removal rates that are at least 16% higher, and the polysilicon to silicon nitride removal rate ratios that are at least 8% higher than the comparative chemical mechanical polishing composition examples in Table 1.2.

This example illustrates the advantages of some functionalized amines of structure (I), when used in combination with an azole of structure (II), in enhancement of polysilicon removal rates, when they are used in corresponding chemical mechanical polishing compositions, over other types of amines.

TABLE 1.1

Example	Comp.	Amine	X	Y	n	Boiling Point of amine (°C)
1A	C-1A	2-Methoxyethylamine	-OCH ₃	-NH ₂	0	95
1B	C-1B	Gamma-Aminobutyric Acid	-CH ₂ COOH	-NH ₂	0	248
1C	C-1C	1-(3-Aminopropyl)imidazole	-CH ₂ (1-Imidazole)	-NH ₂	0	296
1D	C-1D	Isopropylamine	-H	-NH ₂	0	33
1E	1E	Propylamine	-CH ₃	-NH ₂	0	47
1F	1F	2-(2-Aminoethoxy)ethanol	- OCH ₂ CH ₂ OH	-NH ₂	0	125
1G	1G	Monoethanolamine (MEA)	-OH	-NH ₂	0	170
1H	1H	3-Amino-1-propanol	-OH	-NH ₂	1	184

1: Comp.= composition

2: Examples 1A-1D are comparative examples, and Examples 1E, 1F, 1G and 1H are examples of the disclosure.

TABLE 1.2

Polishing Example	Polishing Composition	Polysilicon Removal Rate (Å/min)	Silicon Nitride Removal Rate (Å/min)	Polysilicon to Silicon Nitride Removal Rate Ratio
-------------------	-----------------------	----------------------------------	--------------------------------------	---

P-1A	C-1A	6149	58	106
P-1B	C-1B	6691	73	92
P-1C	C-1C	7020	60	117
P-1D	C-1D	7262	49	148
P-1E	1E	9153	43	213
P-1F	1F	8161	65	126
P-1G	1G	8801	60	147
P-1H	1H	9696	56	172

Example 2

This example demonstrates the effect of a second amino group in the structure of functionalized amines (I) (e.g., when functional groups X and Y are both amino groups) on the polysilicon removal rates and polysilicon-to-silicon nitride selectivity.

Comparative chemical mechanical polishing compositions C-2A through C-2C, inventive chemical mechanical polishing compositions 2D through 2G, and inventive chemical mechanical polishing composition 1H (included in this example for comparison) each contained corresponding amine shown in Table 2.1, 5-aminotetrazole, aminotris(methanephosphonic acid), and high-purity colloidal silica. Enough nitric acid or potassium hydroxide (KOH) was added to adjust pH of the mixture to the final value of 10.8.

The polysilicon and silicon nitride removal rate polishing tests P-2A through P-2G, and polishing test P-1H were performed using chemical mechanical polishing compositions C-2A through C-2C, 2D through 2G and polishing composition 1H from Table 2.1. The polishing rates and selectivity ratio results are summarized in Table 2.2.

The example demonstrates that less substituted diamines with a structure (I), where both X and Y are amino- groups (amines 2D through 2G), exhibited at least 46% higher

polysilicon removal rate and at least 117% higher silicon-to-silicon nitride removal rate ratio than the amines with structure (I), where X is a hydroxyl, Y is an amino- group, namely, inventive amine 1H. Moreover, highly substituted comparative diamines C-2A through C-2C exhibited at least 46% lower polysilicon removal rate than the non-substituted amine with structure (I), where X is a hydroxyl, and Y is an amino group, namely, inventive amine 1H.

The highest polysilicon removal rate among all comparative and inventive examples in Table 2.2 was demonstrated by inventive chemical mechanical polishing composition 2D based on non-substituted diamine 2D with structure (I), where both X and Y are amino groups, namely, ethylene diamine.

Table 2.1

Ex.	Composition	Amine Name	X	Y	n	C1 Substituent	C2 Substituent	C3 Substituent
2A	C-2A	N-(3-Aminopropyl) diethanolamine	-N(CH ₂ CH ₂ OH) ₂	-NH ₂	1	none	none	none
2B	C-2B	N,N-Dimethyldipropylene triamine	-NHCH ₂ CH ₂ CH ₂ -N(CH ₃) ₂	-NH ₂	1	none	none	none
2C	C-2C	1,2-Diaminocyclohexane	-NH ₂	-NH ₂	0	-Cyclohexyl (spanning C1, C2)		n/a
2D	2D	Ethylene diamine	-NH ₂	-NH ₂	0	none	none	n/a
2E	2E	2-(3-Aminopropyl-amino) ethanol	-NHCH ₂ CH ₂ OH	-NH ₂	1	none	none	none
2F	2F	2,2-Dimethyl-1,3-propane diamine	-NH ₂	-NH ₂	1	none	-CH ₃ , -CH ₃	none
2G	2G	1,3-Diaminopentane	-NH ₂	-NH ₂	1	-CH ₂ CH ₃	none	none
1H	1H	3-Amino-1-propanol	-OH	-NH ₂	1	none	none	none

*C1, C2, and C3 refer to the three carbons between groups X and Y in Structure (I).

Table 2.2

Polishing Example	Polishing Composition	Polysilicon Removal Rate ($\text{\AA}/\text{min}$)	Silicon Nitride Removal Rate ($\text{\AA}/\text{min}$)	Polysilicon to Silicon Nitride Removal Rate Selectivity
P-2A	C-2A	1720	5	344
P-2B	C-2B	6147	20	307
P-2C	C-2C	6629	34	195
P-2D	2D	11998	81	148
P-2E	2E	10106	27	374
P-2F	2F	10384	25	415
P-2G	2G	10395	14	743
P-1H	1H	9696	56	172

Example 3

This example demonstrates the synergistic effect between amine 1G of structure (I), where X is hydroxyl, and Y is amino (namely, monoethanolamine), and azole 1G' with structure (II), where R_7 is amino, Z_1 is a nitrogen atom, Z_2 is a nitrogen atom, and Z_3 is a carbon atom (namely, 5-aminotetrazole), on the polysilicon removal rates and polysilicon-to-silicon nitride removal rate selectivity ratios observed in polishing example P-1G as shown in Table 3.1.

The synergy is evident when the results of polishing examples P-3A and P-3B are compared with the result of polishing example P-1G (which is included in Table 3.1 for comparison and is based on composition 1G).

Referring to Table 3.1, comparative chemical mechanical polishing compositions C-3A and C-3B, and inventive chemical mechanical polishing composition 1G each contained aminotris(methanephosphonic acid), high-purity colloidal silica, and enough KOH to adjust pH of the mixture to the final value of 10.8. In addition, composition C-3A contained amine 1G (1-aminoethanol) but did not contain any azole compound; composition C-3B contained azole (5-aminotetrazole) but did not contain any amine compound; and composition 1G contained both amine 1G (1-aminoethanol) and azole (5-aminotetrazole monohydrate) as can be seen in Table

3.1. Conductivity of compositions C-3A and C-3B were similar to conductivity of composition 1G. The polysilicon and silicon nitride polishing tests P-3A, P-3B, and P-1G in Table 3.1 were performed using compositions C-3A, C-3B, and 1G. The results of the polishing tests are summarized in Table 3.1.

The example demonstrates that omission of either amine 1G (1-aminoethanol) or azole (5-aminotetrazole) from the contents of a chemical mechanical composition (compositions C-3B and C-3A, respectively), resulted in a loss of polysilicon removal rate when the composition was used in a polishing example (polishing examples P-3B and P-3A, respectively), even though the ionic strength/conductivity of the compositions were similar to that of polishing composition 1G, which contained both components.

The mechanism of this unexpected synergistic interaction between an amine and an azole is not clear, but it is evident that the values of polysilicon removal rate and polysilicon-to-silicon nitride removal rate selectivity, obtained from composition 1G containing both amine 1G and azole, are at least 34% and 15% higher, respectively, than the highest corresponding values of polysilicon removal rate and polysilicon-to-silicon nitride removal rate selectivity (see P-3A and P-3B), obtained from compositions C-3A and C-3B, where one of the two components was omitted (Table 3.1).

Table 3.1

Polishing Example	Polishing Composition	Amine 1G present	Azole 1G' present	Slurry Conductivity (mS/cm)	Polysilicon Removal Rate (Å/min)	Silicon Nitride Removal Rate (Å/min)	Polysilicon to Silicon Nitride Removal Rate Selectivity
P-3A	C-3A	Yes	No	5.4	6549	51	128
P-3B	C-3B	No	Yes	5.9	3537	59	60
P-1G	1G	Yes	Yes	5.6	8801	60	147

Example 4

This example demonstrates the effect of the structure of various azoles (4A' through 4F', Table 4.1) on the polysilicon removal rates and polysilicon-to-silicon nitride removal rate ratios, observed in polishing examples P-4A through P-4F (Table 4.2), when the azoles are used in combination with amine 1-G (2-aminoethanol) in a chemical mechanical polishing composition.

Furthermore, this example demonstrates the advantages of using azole/azole derivatives of structure II (as tabulated in Table 4.1) wherein R_7 is H, COOH, C₁-C₃ alkyl, or $N(R_9)_2$, in which each R_9 , independently, is H or C₁-C₃ alkyl; provided that, when Z_3 is -N-, R_7 is deleted (as detailed in Claim 1). As can be seen in Table 4.1, the group in azole 4A' that corresponds to R_7 is phenyl. As such, azole 4A' is not a compound of Structure (II). Surprisingly, azole 4A' shows a much lower polysilicon removal rate and a much lower polysilicon-to-silicon nitride removal rate ratio than azole 4B'-4F' (see Table 4.2), which are compounds of Structure (II).

The polishing compositions were prepared in a similar fashion as other examples. Similarly, the polysilicon and silicon nitride polishing tests were performed in polishing examples P-4A through P-4F, and polishing test results of example P-1G (from Table 1.2) are included in Table 4.2 for comparison.

The polishing results summarized in Table 4.2 clearly show the advantages of using a compound with Structure (I) in combination with an azole/azole derivative having Structure (II). The synergistic effect of these compounds in enhancing P-Si removal rates and P-Si to SiN selectivities can be clearly seen in Table 4.2. As can be seen, comparative example P-4A has the lowest P-Si removal rates and the lowest P-Si to SiN selectivity in Table 4.2. All the inventive examples (P-4B through P-4F and P-1G) have much higher P-Si removal rates and P-Si to SiN removal rate ratios. In fact, composition P-4C containing azole 4C (1, 2, 4-triazole) has a 40% higher P-Si removal rates than the comparative example P-1A. Furthermore, composition P-4B

containing azole 4B' (Imidazole) has a 70% higher P-Si to SiN removal rate ratio than the comparative example P-1A.

Table 4.1

Azole	Polishing Composition	Azole Name	Z1	Z2	Z3	R7
4A'	C-4A (comparative)	5-Phenyl-1H-tetrazole	N	N	C	-Phenyl
4B'	4B	Imidazole	C	C	C	-H
4C'	4C	1,2,4-triazole (TAZ)	C	N	C	-H
4D'	4D	Benzotriazole (BTA)	Benzene: an adjacent 6 membered cyclic ring (spanning Z1 and Z2)		N	since Z3 is -N-, R7 is deleted
4E'	4E	3,5-Diamino-1,2,4-triazole	C-NH ₂	N	C	-NH ₂
4F'	4F	1,2,4-Triazole-3-carboxylic acid	C-COOH	N	C	-H
1G'	1G	5-Aminotetrazole (ATA)	N	N	C	-NH ₂

Table 4.2

Polishing Example	Polishing Composition	Azole Name	Polysilicon Removal Rate (Å/min)	Silicon Nitride Removal Rate (Å/min)	Polysilicon to Silicon Nitride Removal Rate Selectivity
P-4A	C-4A (comparative)	5-Phenyl-1H-tetrazole	6633	70	95
P-4B	4B	Imidazole	9057	56	161
P-4C	4C	1,2,4-triazole (TAZ)	9258	64	144
P-4D	4D	Benzotriazole (BTA)	8625	65	132
P-4E	4E	3,5-Diamino-1,2,4-triazole	8791	64	137

P-4F	4F	1,2,4-Triazole-3-carboxylic acid	9118	76	120
P-1G	1G	5-Aminotetrazole (ATA)	8801	60	147

Example 5

The example demonstrates the effect of additional components on polysilicon removal rate and polysilicon-to-silicon nitride removal rate ratio in polishing compositions closely related to inventive composition 1G (Table 5.1). The example demonstrates that additives such as taurine and choline hydroxide, can substantially enhance polysilicon removal rate (as shown in polishing examples P-5A and P-5B, respectively). In addition, choline hydroxide (5B) dramatically enhances the polysilicon-to-silicon nitride removal rate ratio (as shown in polishing example P-5B).

Inventive chemical mechanical polishing compositions 5A, 5B, and 1G listed in Table 5.1 each contained amine 1-G (monoethanolamine), azole (5-aminotetrazole), aminotris(methanephosphonic acid, high-purity colloidal silica, and enough KOH or nitric acid to adjust the pH of the mixture to the final value of 10.8. In addition, composition 5A contained taurine, and composition 5B contained choline hydroxide. Polishing tests P-5A, P-5B and P-1G were performed according to the standard protocol described above. The results are summarized in Table 5.1.

The example demonstrates that inventive polishing composition 5A containing taurine provided an at least 3% improvement in terms of polysilicon removal rate over inventive composition 1G (without any additional components), and provided comparable polysilicon-to-silicon nitride removal rate ratio, when these compositions were used in polishing tests P-5A and P-1G, respectively. The example also demonstrates that inventive polishing composition 5B containing choline hydroxide provided at least 25% enhancement of polysilicon removal rate and 370% enhancement of polysilicon-to-silicon nitride removal rate ratio over inventive

composition 1G (without any additional components), when these compositions were used in polishing tests P-5B and P-1G, respectively.

In addition, Table 5.1 presents a summary of the colloidal stability data collected on inventive compositions 5A, 5B, and 1G prepared as 2X concentrates and subjected to accelerated aging conditions (60 °C oven, 3 weeks). The slurries were classified as “stable” if the growth of mean particle size (MPS) measured by dynamic light scattering (DLS) was <5 nm at the end of the test period, and “unstable” if the MPS growth was found to be >5 nm. MPS can be measured using DLS tools such as Malvern Zetasizer from Malvern Instruments. The results of the colloidal stability testing demonstrated that the 2X concentrate of inventive composition 1G (which contained no additional components), as well as inventive compositions 5A and 5B, were all found to be stable.

Table 5.1

Polishing Example	Polishing Composition	Additive Name	Polysilicon Removal Rate (Å/min)	Silicon Nitride Removal Rate (Å/min)	Polysilicon to Silicon Nitride Removal Selectivity	Colloidal Stability of 2X Concentrate
P-5A	5A	Taurine	9125	66	138	stable
P-5B	5B	Choline Hydroxide	11042	16	690	stable
P-1G	1G	None	8801	60	147	stable


While this disclosure has been described with respect to the examples set forth herein, it is understood that other modifications and variations are possible without departing from the spirit and scope of the disclosure as defined in the appended claims.

CLAIMS

1. A chemical mechanical polishing composition, comprising

- 1) at least one abrasive;
- 2) at least one compound of structure (I):

[Formula 1]

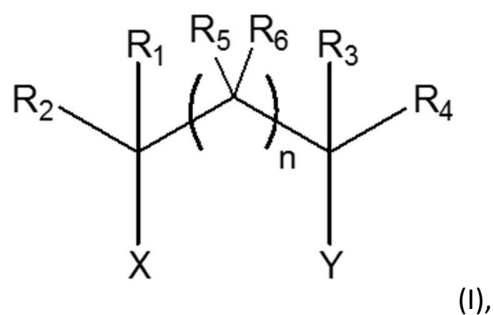


(in structure (I), n is 0, 1, 2, or 3;

each of X and Y, independently, is O(R_a), CH₂(R_a), or NH(R_a), provided that at least one of X and Y is O(R_a) or NH(R_a), in which each R_a, independently, is H or C₁-C₂ alkyl optionally substituted by hydroxyl or NH₂, and

each of R₁-R₆, independently, is H, OH, or C₁-C₃ alkyl optionally substituted by OH or NH₂);

3) at least one compound of structure (II):

[Formula 2]



(in structure (II), each of Z_1 and Z_2 , independently, is $-CR_8-$ or $-N-$, in which R_8 is H, $N(R_b)_2$, $COOH$, or C_1-C_3 alkyl; each R_b , independently, being H or C_1-C_3 alkyl; or Z_1 and Z_2 together form a 5-6 membered ring fused with the 5-membered ring in Structure (II);

Z_3 is $-C-$ or $-N-$; and

R_7 is H, $COOH$, C_1-C_3 alkyl, or $N(R_9)_2$, in which each R_9 , independently, is H or C_1-C_3 alkyl; provided that, when Z_3 is $-N-$, R_7 is deleted); and

4) water;

wherein the composition does not include tetramethylammonium hydroxide or a salt thereof and the composition has a polysilicon-to-silicon nitride removal rate ratio of at least 50:1.

2. The composition of claim 1, wherein the compound of structure (I) is an aminoalcohol.

3. The composition of claim 2, wherein the compound of structure (I) is selected from the group consisting of monoethanolamine, diethanolamine, 1-amino-2-propanol, 1-amino-2-butanol, 1,3-diamino-2-propanol, 3-amino-1,2-propanediol, 3-amino-1-propanol, 2-(2-aminoethoxy)ethanol, 2-amino-3-methyl-1-butanol, and 5-amino-1-pentanol.

4. The composition of claim 1, wherein the compound of structure (I) is a diamine.

5. The composition of claim 4, wherein the compound of structure (I) is selected from the group consisting of 2,2-dimethyl-1,3-propane diamine, 1,3-diaminopentane, and 2-(3-aminopropylamino)ethanol.

6. The composition of claim 1, wherein, when n is 0 and each of R_1-R_4 is H, at least one of X and Y is OH.

7. The composition of any one of claims 1 to 6, wherein the compound of structure (I) is in an amount of from 0.1 wt% to 15 wt% of the composition.

8. The composition of any one of claims 1 to 7, wherein the compound of structure (II) is an imidazole or a triazole.
9. The composition of claim 8, wherein the compound of structure (II) is selected from the group consisting of imidazole, 1,2,4-triazole, 3-amino 1,2,4-triazole, benzotriazole, 3,5-diamino-1,2,4-triazole, and 1,2,4-triazole-3-carboxylic acid.
10. The composition of any one of claims 1 to 7, wherein the compound of structure (II) is a tetrazole.
11. The composition of claim 10, wherein the compound of structure (II) is 5-(aminomethyl)tetrazole, 5-methyl-1H-tetrazole, 5-aminotetrazole, or a hydrate thereof.
12. The composition of any one of claims 1 to 11, wherein the compound of structure (II) is in an amount of from 0.1 wt% to 15 wt% of the composition.
13. The composition of any one of claims 1 to 12, wherein the abrasive is selected from the group consisting of alumina, fumed silica, colloidal silica, coated particles, titania, ceria, zirconia, and any combinations thereof.
14. The composition of claim 13, wherein the abrasive is colloidal silica.
15. The composition of any one of claims 1 to 14, wherein the abrasive is in an amount of from 0.05 wt% to 20 wt% of the composition.
16. The composition of any one of claims 1 to 15, further comprising a pH adjusting agent.

17. The composition of any one of claims 1 to 16, further comprising a salt containing a sulphonate group, an amino group, a carboxylate group, or a tetraalkylammonium group, the salt being different from a salt of tetramethylammonium hydroxide.
18. The composition of claim 17, wherein the salt is selected from the group consisting of amino acids, taurine, and choline hydroxide.
19. The composition of claim 17 or 18, wherein the salt is in an amount of from 0.05 wt% to 5 wt% of the composition.
20. The composition of any one of claims 1 to 19, further comprising an aminophosphonic acid.
21. The composition of claim 20, wherein the aminophosphonic acid is amino(trimethylenephosphonic acid).
22. The composition of claim 20 or 21, wherein the aminophosphonic acid is in an amount of from 0.01 wt% to 5 wt% of the composition.
23. The composition of any one of claims 1 to 22, wherein the composition has a pH of from 7 to 12.
24. The composition of any one of claims 1 to 23, wherein the composition does not include a bicarbonate salt or an oxidizing agent.
25. The composition of any one of claims 1 to 24, wherein the composition has a polysilicon removal rate of at least 8000 Å/minute.
26. The composition of any one of claims 1 to 25, wherein the composition has a polysilicon-to-silicon nitride removal rate ratio of at most 200:1.

27. The polishing composition of any one of claims 1 to 26, wherein the composition is capable of being diluted at least two-fold at point of use (POU) before polishing, without deterioration in polishing performance when compared to the polishing composition before dilution.


28. A method for polishing a polysilicon film exposed on the surface of a wafer substrate, comprising treating the polysilicon film with the composition of any one of claims 1 to 27.

29. The method of claim 28, further comprising diluting the composition with deionized water prior to the polishing treatment step.

30. A chemical mechanical polishing composition, consisting of:

- 1) at least one abrasive;
- 2) at least one compound of structure (I):

[Formula 3]

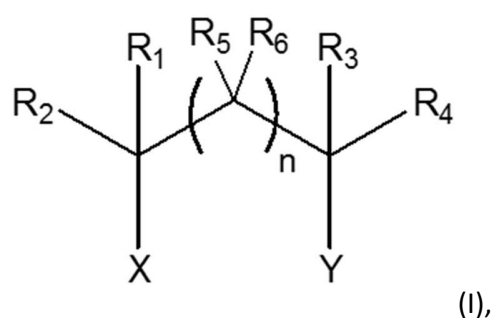


(in structure (I), n is 0, 1, 2, or 3;

each of X and Y, independently, is O(R_a), CH₂(R_a), or NH(R_a), provided that at least one of X and Y is O(R_a) or NH(R_a), in which each R_a, independently, is H or C₁-C₃ alkyl optionally substituted by hydroxyl or NH₂, and

each of R₁-R₆, independently, is H, OH, or C₁-C₃ alkyl optionally substituted by OH or NH₂);

- 3) at least one compound of structure (II):

[Formula 4]



(in structure (II),

each of Z_1 and Z_2 , independently, is $-CR_8-$ or $-N-$, in which R_8 is H, $N(R_b)_2$, $COOH$, or C_1-C_3 alkyl; each R_b , independently, being H or C_1-C_3 alkyl; or Z_1 and Z_2 together form a 5-6 membered ring fused with the 5-membered ring in Structure (II);

Z_3 is $-C-$ or $-N-$; and

R_7 is H, $COOH$, C_1-C_3 alkyl, or $N(R_9)_2$, in which each R_9 , independently, is H or C_1-C_3 alkyl; provided that, when Z_3 is $-N-$, R_7 is deleted);

4) at least one tetraalkylammonium salt, the at least one tetraalkylammonium salt being different from a salt of tetramethylammonium hydroxide;

5) at least one pH adjusting agent;

6) at least one amino acid; and

7) water.

31. The composition of claim 30, wherein the composition has a polysilicon-to-silicon nitride removal rate ratio of at least 50:1.

32. The composition of claim 30 or 31, wherein the composition has a polysilicon-to-silicon nitride removal rate ratio of at most 200:1.

33. The composition of any one of claims 30 to 32, wherein the composition has a polysilicon removal rate of at least 8000 Å/minute.

34. The composition of any one of claims 30 to 33, wherein the compound of structure (I) is an aminoalcohol.

35. The composition of claim 34, wherein the compound of structure (I) is selected from the group consisting of monoethanolamine, diethanolamine, 1-amino-2-propanol, 1-amino-2-butanol, 1,3-diamino-2-propanol, 3-amino-1,2-propanediol, 3-amino-1-propanol, 2-(2-aminoethoxy)ethanol, 2-amino-3-methyl-1-butanol, and 5-amino-1-pentanol.

36. The composition of any one of claims 30 to 33, wherein the compound of structure (I) is a diamine.

37. The composition of claim 36, wherein the compound of structure (I) is selected from the group consisting of 2,2-dimethyl-1,3-propane diamine, 1,3-diaminopentane, and 2-(3-aminopropylamino)ethanol.

38. The composition of any one of claims 30 to 33, wherein, when n is 0 and each of R₁-R₄ is H, at least one of X and Y is OH.

39. The composition of any one of claims 30 to 38, wherein the compound of structure (I) is in an amount of from 0.1 wt% to 15 wt% of the composition.

40. The composition of any one of claims 30 to 39, wherein the compound of structure (II) is an imidazole or a triazole.

41. The composition of claim 40, wherein the compound of structure (II) is selected from the group consisting of imidazole, 1,2,4-triazole, 3-amino 1,2,4-triazole, benzotriazole, 3,5-diamino-1,2,4-triazole, and 1,2,4-triazole-3-carboxylic acid.

42. The composition of any one of claims 30 to 39, wherein the compound of structure (II) is a tetrazole.

43. The composition of claim 42, wherein the compound of structure (II) is 5-(aminomethyl)tetrazole, 5-methyl-1H-tetrazole, 5-aminotetrazole, or a hydrate thereof.

44. The composition of any one of claims 30 to 43, wherein the compound of structure (II) is in an amount of from 0.1 wt% to 15 wt% of the composition.

45. The composition of any one of claims 30 to 44, wherein the abrasive is selected from the group consisting of alumina, fumed silica, colloidal silica, coated particles, titania, ceria, zirconia, and any combinations thereof.

46. The composition of any one of claims 30 to 44, wherein the abrasive is colloidal silica.

47. The composition of any one of claims 30 to 46, wherein the abrasive is in an amount of from 0.05 wt% to 20 wt% of the composition.

48. The composition of any one of claims 30 to 47, wherein the tetraalkylammonium salt is in an amount of from 0.05 wt% to 5 wt% of the composition.

49. The composition of any one of claims 30 to 48, wherein the composition has a pH of from 7 to 12.