



(43) International Publication Date
4 October 2012 (04.10.2012)

- (51) International Patent Classification:
H01R 4/60 (2006.01) *F16M 13/02* (2006.01)
B23P 11/00 (2006.01)
- (21) International Application Number:
PCT/US2012/030826
- (22) International Filing Date:
28 March 2012 (28.03.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/468,239 28 March 2011 (28.03.2011) US
- (71) Applicant (for all designated States except US): **FISHMAN CORPORATION** [US/US]; 192 South Street, Hopkinton, MA 01748 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BEEBE, W., Scott** [US/US]; 49 North Main Street, Unit A, Berkley, MA 02779 (US).
- (74) Agents: **DINGMAN, Brian, M.** et al.; Mirick, O'Connell, DeMallie & Lougee, LLP, 1800 West Park Drive, Suite 400, Westborough, MA 01581 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: SYSTEM AND METHOD FOR RELEASABLY COUPLING A FLUID DISPENSER TO A DISPENSING SYSTEM

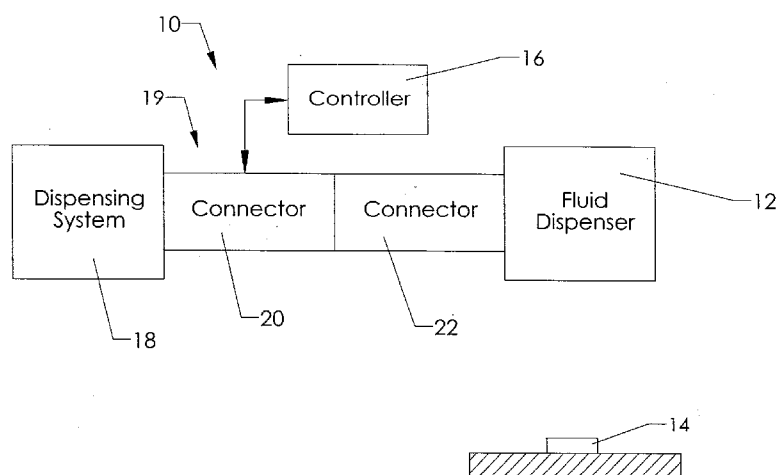


Figure 1

(57) Abstract: A system and method for releasably coupling a fluid dispenser (12) to a structure (18). There is a push to connect-pull to disconnect connector system (19) that has first (22) and second (20) mating connectors. A first connector (22) is mounted to the dispenser (12) and a second connector (20) is mounted to the structure (18). The connector system (19) accomplishes both mechanical and electrical interconnection between the dispenser (12) and the structure (18).