



(51) International Patent Classification:
G01N 27/22 (2006.01)

(21) International Application Number:
PCT/IB2010/001654

(22) International Filing Date:
6 July 2010 (06.07.2010)

(25) Filing Language: Italian

(26) Publication Language: English

(71) Applicant (for all designated States except US): **BRY-AIR PROKON SAGL** [CH/CH]; Viale A. Volta 16, 6830 Chiasso (CH).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SAMMARTINI, Marco** [IT/CH]; c/o Bry-Air Prokon Sagl, Viale A. Volta 16, CH-6830 Chiasso (CH).

(74) Agents: **FABIANO, Piero** et al.; Fiammenghi-Fi-ammenghi, Via San Gottardo 15, 6900 Lugano (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CAPACITANCE ELECTRODE STRUCTURE FOR MEASURING MOISTURE

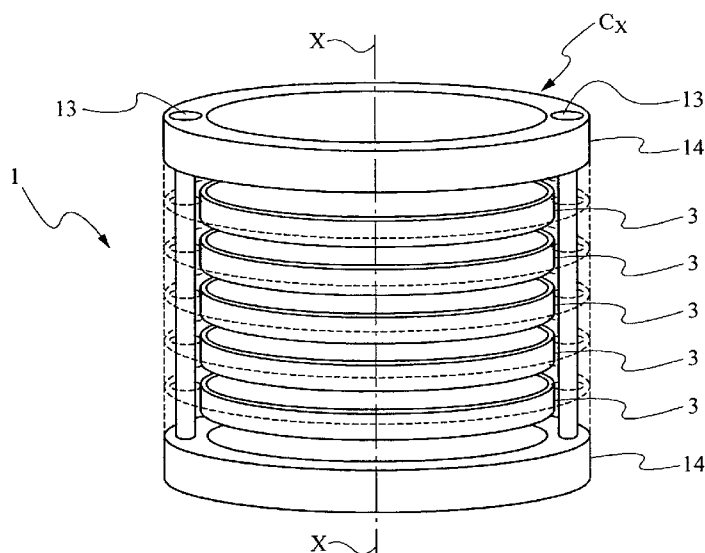


Fig. 1

(57) Abstract: Device (1) for measuring moisture of materials flowing in the shape of dried, liquid or gaseous granulates, or in the shape of powders in at least one duct disposed at least partially along an axis (X - X) through which the material of which the moisture has to be measured flows, comprising: - at least one capacitor (Cx) wherein the material of which the moisture has to be measured flows, characterized in that the capacitor (CX) comprises: - at least two metallic rings (3) coaxially mounted to said axis X - X and adjacent to an inner wall of the duct through which the material of which the moisture has to be measured flows; - at least one dielectric element (5) having: dielectric constant substantially linear with the temperature changing, and thermal expansion lower than $\alpha = 27 \times 10^{-6}/^{\circ}\text{C}$.