

[도1]

Sample Dispersion Unit

☒ Use SDU



Default Dispersion Settings

Low Energy

High Energy

Injection Pressure (bar)



1.0

Injection Time (ms)



20

Settling Time (sec)



60

Injection Volume Indicator






[도2]

Illumination Settings	
Light source ☒ Diascopic (bottom light) ☐ Episcopic (top light) ☐ Bright field ☒ Dark field (Manual light control only) ☐ Polariser/ DIC	☐ Light calibration over sample (Recommended for non-transparent substrates)
Light options ☒ Automatic light calibration Calibration intensity : 70.00 Intensity tolerance : 0.20 ☐ Manual light control (Advanced)	

[도3]

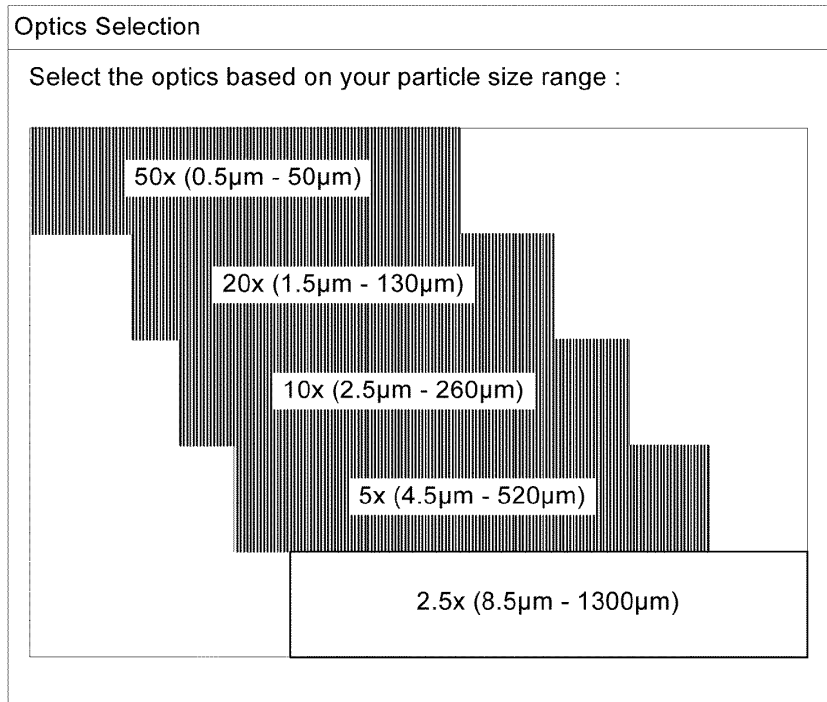


[도4]


Scan Areas

Select areas to analyse

Drag rectangles to define new areas or drag the edge of an existing area to change the size and/or position.

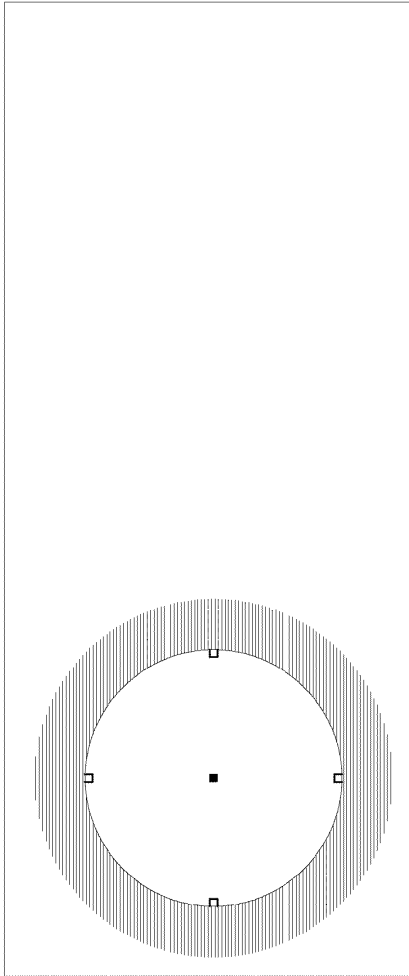

Selected analysis area



Circular ▼

X pos. (mm):
55.000

Y pos. (mm):
52.000

Radius (mm):
33.346

☐ Refine position before measurement

Area (mm²)
3493.312

Delete

Reset to default

Time estimate

Est. time this optic (mins):
12

Est. total time (mins):
20