

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 June 2003 (05.06.2003)


PCT

(10) International Publication Number
WO 03/046421 A1

- (51) International Patent Classification⁷: **F16K 17/38**, (72) Inventor; and
A62C 39/00, 35/64 (75) Inventor/Applicant (for US only): **LINDEN, Sean**
[GB/GB]; 1/17 Bromford Crescent, Erdington, Birmingham B24 9RJ (GB).
- (21) International Application Number: PCT/GB02/04981
- (22) International Filing Date: (74) Agents: **CROSTON, David** et al.; Withers & Rogers,
1 November 2002 (01.11.2002) Goldings House, 2 Hays Lane, London SE1 2HW (GB).
- (25) Filing Language: English (81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
(26) Publication Language: English CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.
- (30) Priority Data: (71) Applicant (for all designated States except US): **THE**
0127969.4 22 November 2001 (22.11.2001) GB **LINDEN SHIELD LIMITED** [GB/GB]; 1/17 Bromford
0214736.1 20 June 2002 (20.06.2002) GB Crescent, Erdington, Birmingham B24 9RJ (GB).
(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: TEMPERATURE-SENSITIVE SAFETY VALVE ASSEMBLY

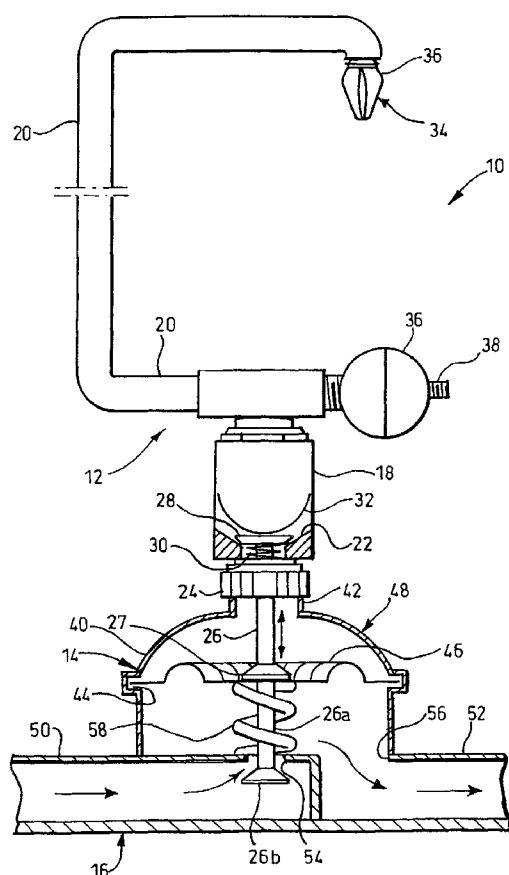

(57) Abstract: The present invention relates to a temperature-sensitive safety valve assembly (10). The assembly (10) comprising a first region (16) for a first pressurised fluid, a second region (20) for a second pressurised fluid, a valve (26, 28, 27, 26a and 26b) between the first and second regions (16, 20) designed to be actuated by the pressure of a first pressurised fluid in the first region against biasing means (58) to open an outlet (54), for a first pressurised gas, from the first region, and heat-sensitive sealing means (34) on the second region (20), being de-sealable at high temperature to de-pressurize the second region, thereby actuating the valve (26, 28, 27, 26a, 26b) to close the outlet and seal the first region (16).



WO 03/046421 A1



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*