



(51) International Patent Classification:
B62B 1/20 (2006.01)

(21) International Application Number:
PCT/US2013/078132

(22) International Filing Date:
27 December 2013 (27.12.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/746,814 28 December 2012 (28.12.2012) US
61/828,581 29 May 2013 (29.05.2013) US
61/880,040 19 September 2013 (19.09.2013) US

(72) Inventor; and

(71) Applicant : **BROWN, Ryon** [US/US]; 5508 N. Chestnut
St., Lehi, UT 84043 (US).

(74) Agent: **BARRETT, Tyler**; Loza & Loza, LLP, 305 N.
Second Ave., #127, Upland, CA 91786 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: A MOBILE CART CONVERTIBLE AMONG A PLURALITY OF OPERATIONAL MODES

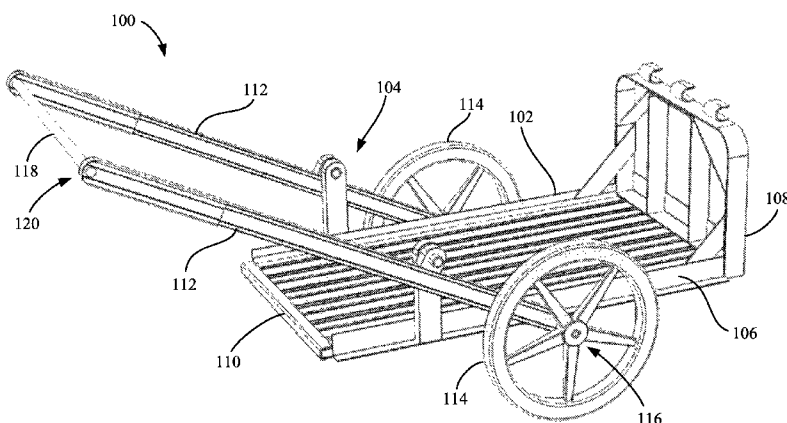


FIG. 1

(57) Abstract: Mobile carts are adapted to facilitate both storage and mobility. In at least one example, a mobile cart may include a frame with a first longitudinal end and an opposing second longitudinal end. A swing-arm assembly may be coupled to the frame to pivot between a storage mode and a cart mode, where a handle is positioned adjacent the first longitudinal end of the frame and a pair of wheels are positioned beyond the second longitudinal end of the frame when the swing-arm assembly is positioned in the storage mode, and where the handle is positioned beyond the second longitudinal end of the frame and the wheels are positioned adjacent a bed portion of the frame when the swing-arm assembly is positioned in the cart mode. Other aspects, embodiments, and features are also included.

